Calhoun
Institutional Archive of the Naval Postgraduate School

Calhoun: The NPS Institutional Archive

DSpace Repository

Theses and Dissertations | 1. Thesis and Dissertation Collection, all items

1964

Proton magnetometer coherence

Anderson, Robert A.

Monterey, California: U.S. Naval Postgraduate School

http://hdl.handle.net/10945/12923

Downloaded from NPS Archive: Calhoun

http://www.nps.edu/library

Calhoun is the Naval Postgraduate School's public access digital repository for research materials and institutional publications created by the NPS community. Calhoun is named for Professor of Mathematics Guy K. Calhoun, NPS's first appointed -- and published -- scholarly author.

Dudley Knox Library / Naval Postgraduate School
411 Dyer Road / 1 University Circle
Monterey, California USA 93943

NPS ARCHIVE
1964
ANDERSON, R.

PROTON MAGNETOMETER COHERENCE

ROBERT A. ANDERSON

DUDLEY KNOX LIBRARY
NAVAL POSTGRADUATE SCHOOL
MONTEREY, CA 93943-5101

LIBRARY
U.S. NAVAL POSTGRADUATE SCHOOL
MONTEREY, CALIFORNIA

Mont 124

PROTON MAGNETOMETER

COHERENCE

* * * * *

Robert A. Anderson

PROTON MAGNETOMETER

COHERENCE

by

Robert A. Anderson

Submitted in partial fulfillment of
the requirements for the degree of

MASTER OF SCIENCE
IN
ENGINEERING ELECTRONICS

United States Naval Postgraduate School
Monterey, California

1964

S Archive
964
nderson, R.
A855

Library
U. S. Naval Postgraduate School
Monterey, California

PROTON MAGNETOMETER COHERENCE

by

Robert A. Anderson

This work is accepted as fulfilling
the thesis requirements for the degree of

MASTER OF SCIENCE
IN
ENGINEERING ELECTRONICS
from the
United States Naval Postgraduate School

ABSTRACT

The results of coherence measurements of three free precession proton magnetometers are discussed. The measuring and data processing instrumentation is described. The noise associated with the instrumentation has been measured and presented in statistical form. The results of measurements with elementary local perturbations are included to illustrate the target detection problem. The limitations of the instrument for target detection are discussed and imporvements suggested.

The writer wishes to express appreciation to Professor Carl E. Menneken for suggesting the problem, and Professor Harold A. Titus for encouragement and assistance in the preparation of this thesis.

TABLE OF CONTENTS

Section	Title	Page
1	Introduction	1
2	Instrumentation	3
3	Data Analysis	22
4	Results	29
5	Conclusions	47
	Bibliography	48
Appendix I	Results of Magnetic Field and Perturbation Experiments	
Appendix II	160 Programs and Operator Instructions	
Appendix III	Fortran Programs	
Appendix IV	Circuit Diagrams	

LIST OF ILLUSTRATIONS

Figure		Page
1	Basic Counter Unit	4
2	Effect of Noncoherent Gating	6
3	Counter Instrument	9
4	Magnetometer Input Section	10
5	Magnetometer Instrumentation	12
6	Data Aquisition and Processing	13
7	Storage Tape Format	15
8	Tape Deck Output Register	16
9	Interface Input Section	17
10	Output Section Decodeing and Resume	18
11	Preliminary Processing Setup	19
12	Perturbation Experiment Geometry	27
13 - 25	Graphical Results of Ideal Signal Experiment	30 - 42
26	Analog Plot H vs. Time	43
27	Analog Difference Plot	44
28	Proton Precession Signals	45
29	Filter Design	24

1. Introduction

The use of magnetometers for target detection requires identification of signals in the presence of the noise associated with the earth's magnetic field. The signal, in many cases, will be smaller in magnitude than the normal diurnal variation of the field, local fixed perturbations and geomagnetic pulsations. The system noise is of major concern in a detection scheme using magnetometers. This paper presents the preliminary results of a study of three proton free precession magnetometers operated under non laboratory conditions at Naval Postgraduate School La Mesa Village site.

The free precession magnetometer consists of a coil of wire in which a source of protons is placed. A strong field is applied to orientate the proton spins in a direction approximately normal to the earth's field. The polarizing field is then removed in a manner such that the spins cannot follow the field. The earth's field then causes the protons to precess about the lines of magnetic force at the Lamour frequency given by:

$$\omega = \gamma_p H \qquad (1)$$

where γ_p = gyro magnetic ratio

= magnetic moment/angular momentum

and

H = magnitude of external field

(earth's field)

The net precessing magnetic moment causes a voltage to be induced in a coil surrounding the sample. Since the precessional frequency is dependent only on the external magnetic field, the measurement of H consists of measuring the frequency of the induced emf. The inherent

accuracy of the free precession magnetometer is determined by the spectral line width (1), which is related to the relaxation time T_2, and is given by:

$$\Delta H = \frac{1}{\gamma_p T_2} \qquad (2)$$

where

$$= 3.6\,\gamma$$

H = Half intensity width

T_2 = 1 sec (meas)

$= 10^{-5}$ GAUSS

The gyromagnetic ratio has been measured by the NBS to better than 1 part in 10^5. Full advantage of this inherent accuracy has not been utilized because of the problems associated with the frequency measurement. The frequency measurement is complicated by the fact that only a limited time is available for measurement. The signal received from the magnetometer is in the few microvolt range; hence locally generated electronic noise and transients from the polarizing operation cause the signal to noise ratio to be small. Standard counting techniques are used for measurement. To get the required accuracy, the frequency must be obtained from period or multiple period average measurements. The process is digital in nature and lends itself very nicely to computer processing of the data.

The main disadvantage is that any reasonable attempt to obtain an analog signal proportional to the measurement is an analog of period rather than frequency; therefore, the analog is the inverse of the quantity of interest. This does not present serious problems for target detection since the absolute magnitude of field is not of interest.

2. Instrumentation

2.1 Measurement

The engineering aspect of the measurement problem can be stated simply as follows:

Given: Three transient type signals of frequency approximately two kc/s occuring at the same time, with usable duration of about 3/4 sec. The signals are in the microvolt range. The recurrance rate is to be 2 sec. The measurements must be conducted in the presense of high electronic noise such as relay transients, contact noise and transients from the collapsing polarizing field.

Find: The frequency of the oscillations accurate to 1 part in 10^5 or better, and suitable means of data aquisition and processing.

The funds available excluded the possibility of using commercially constructed instruments or components. Also, modifications and interfacing would have to be done if components were used. Hence, the basic measuring instrumentation was constructed at NPGS. No detailed circuit design is presented; however the circuit diagrams are included in Appendix IV.

Assume the precession signal has been amplified in a suitable, low noise, narrow band preamplifier, and converted to a signal having fast waveform. Referring to the simplified block diagram of Fig. 1, the basic counter operation is as follows: Let the slow and fast counters consist of flip-flop counting units, connected to form a binary counter. The gate control flip-flop is capable of being triggered into either state. The multiplier converts the clock frequency to a harmonic of the precision 100 kc/s oscillator.

BASIC COUNTER UNIT

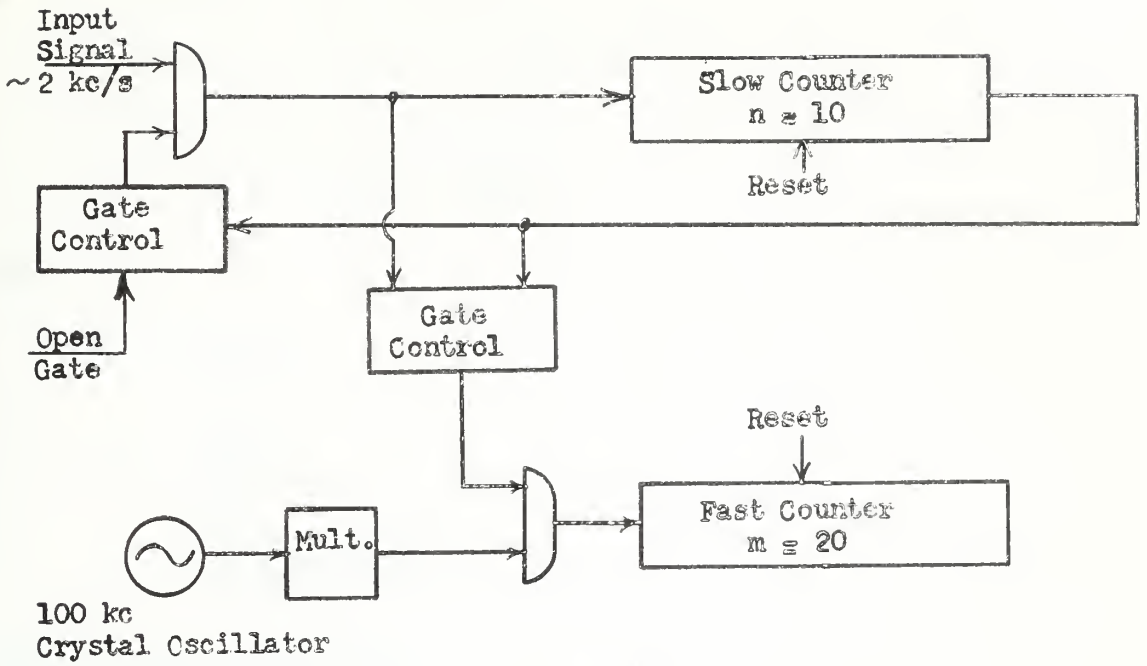

Figure 1

Let all counters be reset and ready for operation. The unknown input signal is applied to the gate. After a delay of approximately 150 ms, an external signal triggers the gate control to open the signal gate. The long delay is necessary to allow for damping the polarizing field and relay transients. The first pulse through the signal gate opens the clock gate. The fast counter then counts the number of clock pulses occuring during the time interval determined by the slow counter. The slow counter is increased one for each cycle of unknown input signal. After the slow counter has reached a predetermined number, both signal and clock gates are closed, and the number in the fast counter is a value of the time interval of 2^n cycles of unknown input signal, or can be reduced to the average period of the signal.

Let us define

N = number in fast counter

2^n = number of cycles of unknown signal

t_p = period of clock (μsec.)

t_n = period of unknown signal

Then we have

$$T_m = N t_p$$

$$t_n = \frac{T_m}{2^n}$$

$$= N t_p / 2^n$$

Substituting in (1) gives

$$H = \frac{2\pi \cdot 2^n}{\gamma_p N t_p} \qquad (3)$$

and with $n = 10$,

$$H = \frac{2348400 \times 1024}{N} \qquad (4)$$

The accuracy of such a scheme depends on:

a. The accuracy in determining the zero crossing of the unknown signal.

b. Propagation delay in the slow counter.

c. Gating speed.

d. Accuracy of the clock.

e. Plus or minus the las bit, due to noncoherent gating as illustrated in Fig. 2.

EFFECT OF NONCOHERENT GATING

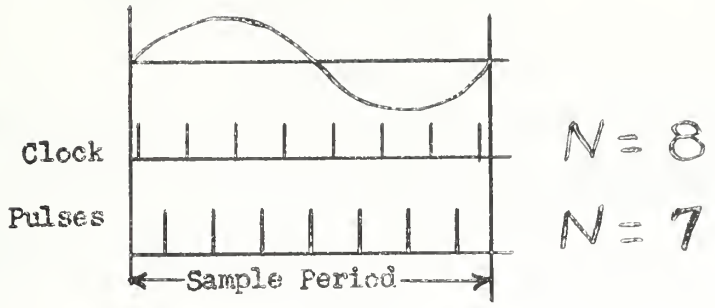

Figure 2

The errors due to determining the zero crossing are usually the dominant error in using this technique; however when averaged over 1024 cycles they become small and the largest error is the plus or minus last bit, as shown. The accuracy in determining the zero crossing in the presence of noise (2) is:

$$t_n = \frac{V_n}{S}$$

where:

t_n = maximum error in trigger time in sec.

V_n = peak to peak noise in volts.

S = slope of ideal signal at point of trigger level.

For a sinusoidal input:

$$S = \frac{d}{dt}(V_s \sin \omega t)\Big|_{\omega t = n\pi}$$

$$= V_s \omega$$

Assume a signal to noise ratio 2 V_s/V_n = 20 db, and

$$\omega \cong 2\pi \times 2 \text{ kc/s}$$

then:

$$t_n = 0.318 \times 10^{-4}$$

For 1024 periods:

$$t_m \cong 0.3 \times 10^{-7} \text{ sec}$$

$$= 0.03 \mu\text{sec}$$

The plus or minus last bit error if the clock is 100 kc, is ± 10 sec., and the other errors mentioned are negligible compared to the 10 μsec. error.

Consider the ± 1 bit limitation in detail for the earth's field 50950 γ, which is the approximate value at Monterey, California. let:

$N = 0013405 1_8 \pm 1$ bit

1 bit ± 10 μsec.

then:

$$\Delta H = \pm 1.1 \gamma$$

This becomes the sensitivity of the instrument. If the clock is increased to 1 mc/sec, 1 bit = μsec., and:

$\Delta H = \pm 0.11 \gamma$; however other noise becomes appreciable and cannot be neglected. The circuits were designed for 1 mc/sec operation, but the measurements to date were conducted at 100 kc/s and 300 kc/s clock rates. The added complication is to construct 3 meters that will read identical, the input circuitry and slow counters must have identical characteristics. This is impossible from a practical point of view. The result is that the three counters with an ideal signal input can vary ± 1 bit in comparing their readings.

A simplified block diagram and photo of the magnetometer is shown in Figs. 3, 4 and 5. It must be remembered that operation

is to be in remote locations where extremes of temperature, line voltage fluctuations, poor grounds, etc. will be found; hence circuits that are sensitive to these variations must be carefully compensated.

For the experiments under consideration, locating the sensing coils approximately 500' apart would be sufficient; however for further experiments a distance of greater than 500' might be necessary. Therefore, a provision to place the preamps in the line nearer the sensing coils for improved signal to noise ratio was included. Bias for the preamps is applied to the signal line, from the console to eliminate the need for battery replacement. The relays that provide the two to three amps of polarizing current, and provide for dissapation of the stored energy when polarizing current is turned off, must precede the preamp. Since this unit is placed near the sense coil, it must be magnetically clean.

Referring to the block diagram the components that are common to the three units are the clock, timer, recorders and the power supplies.

COUNTER INSTRUMENT

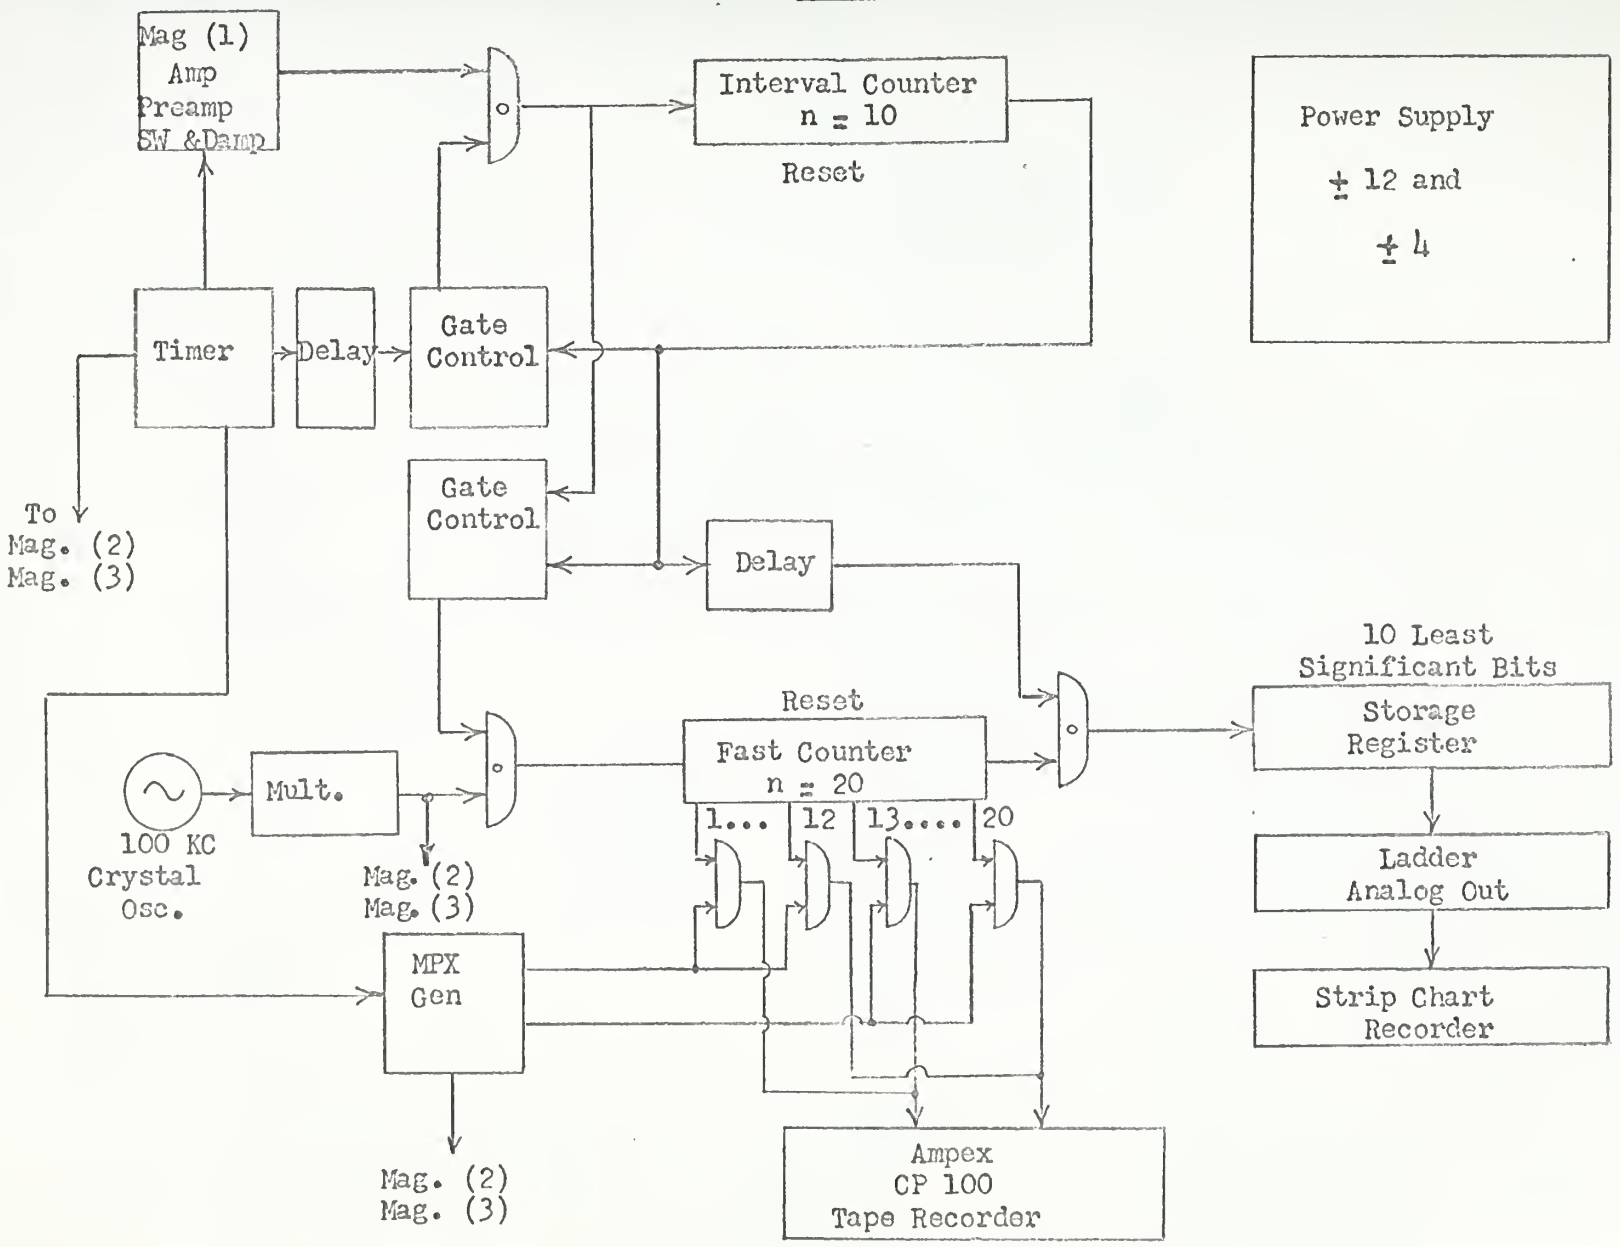

Figure 3

MAGNETOMETER INPUT SECTION

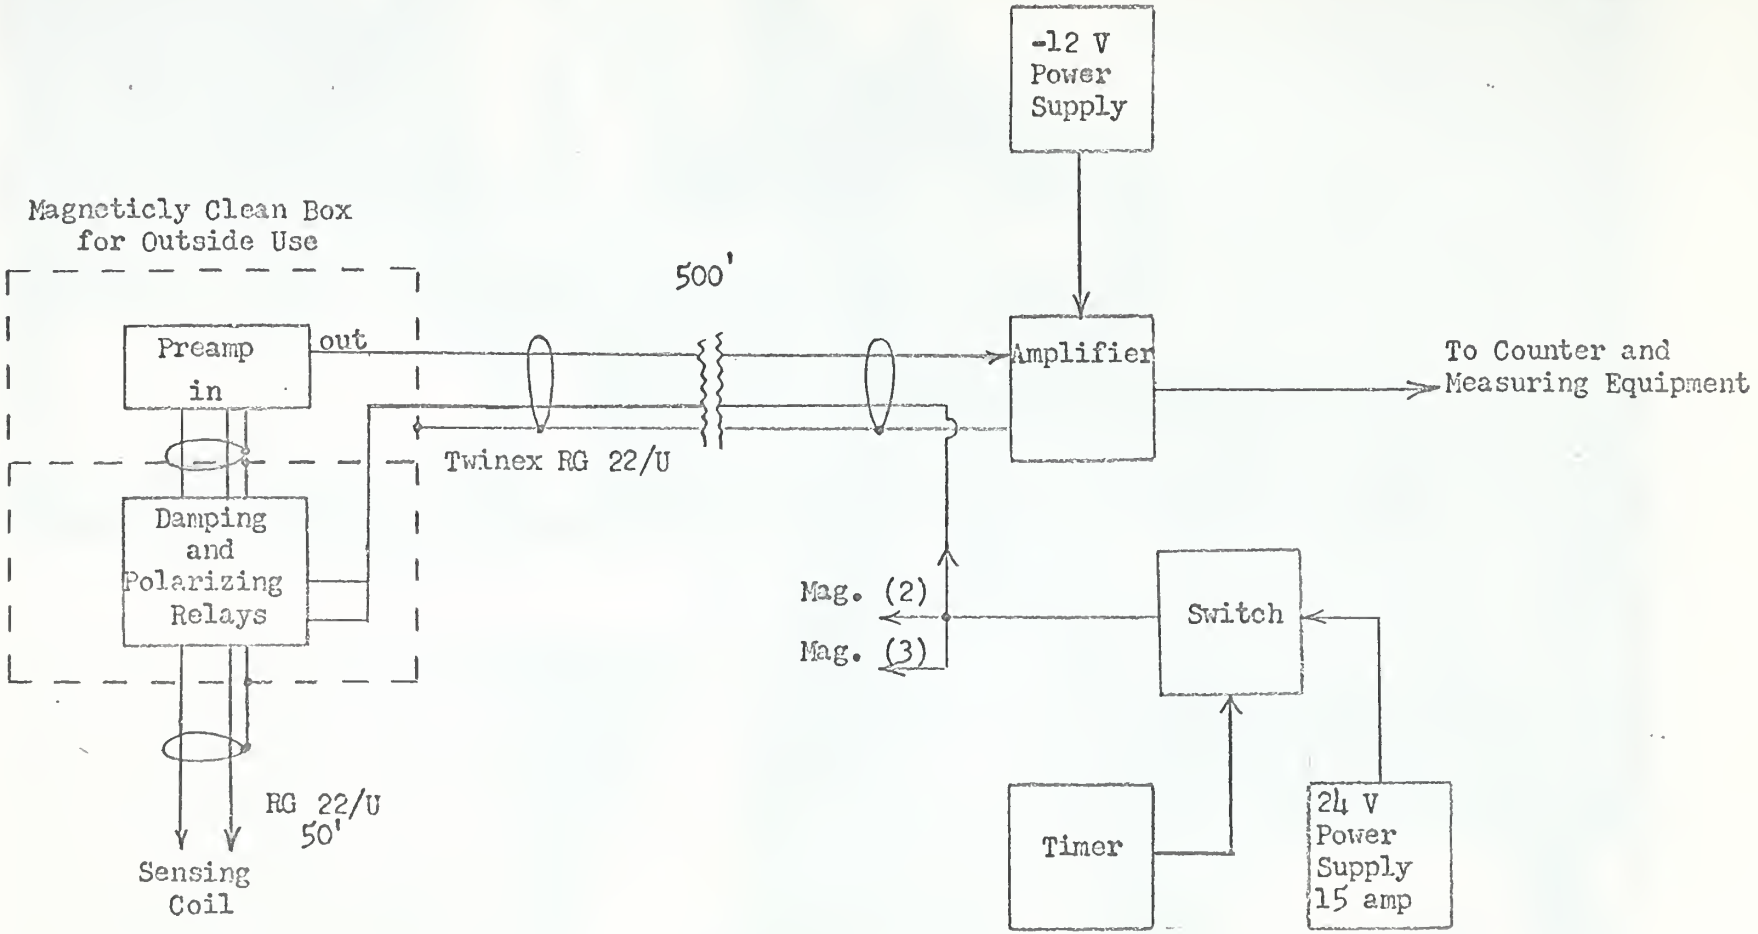

Figure 4

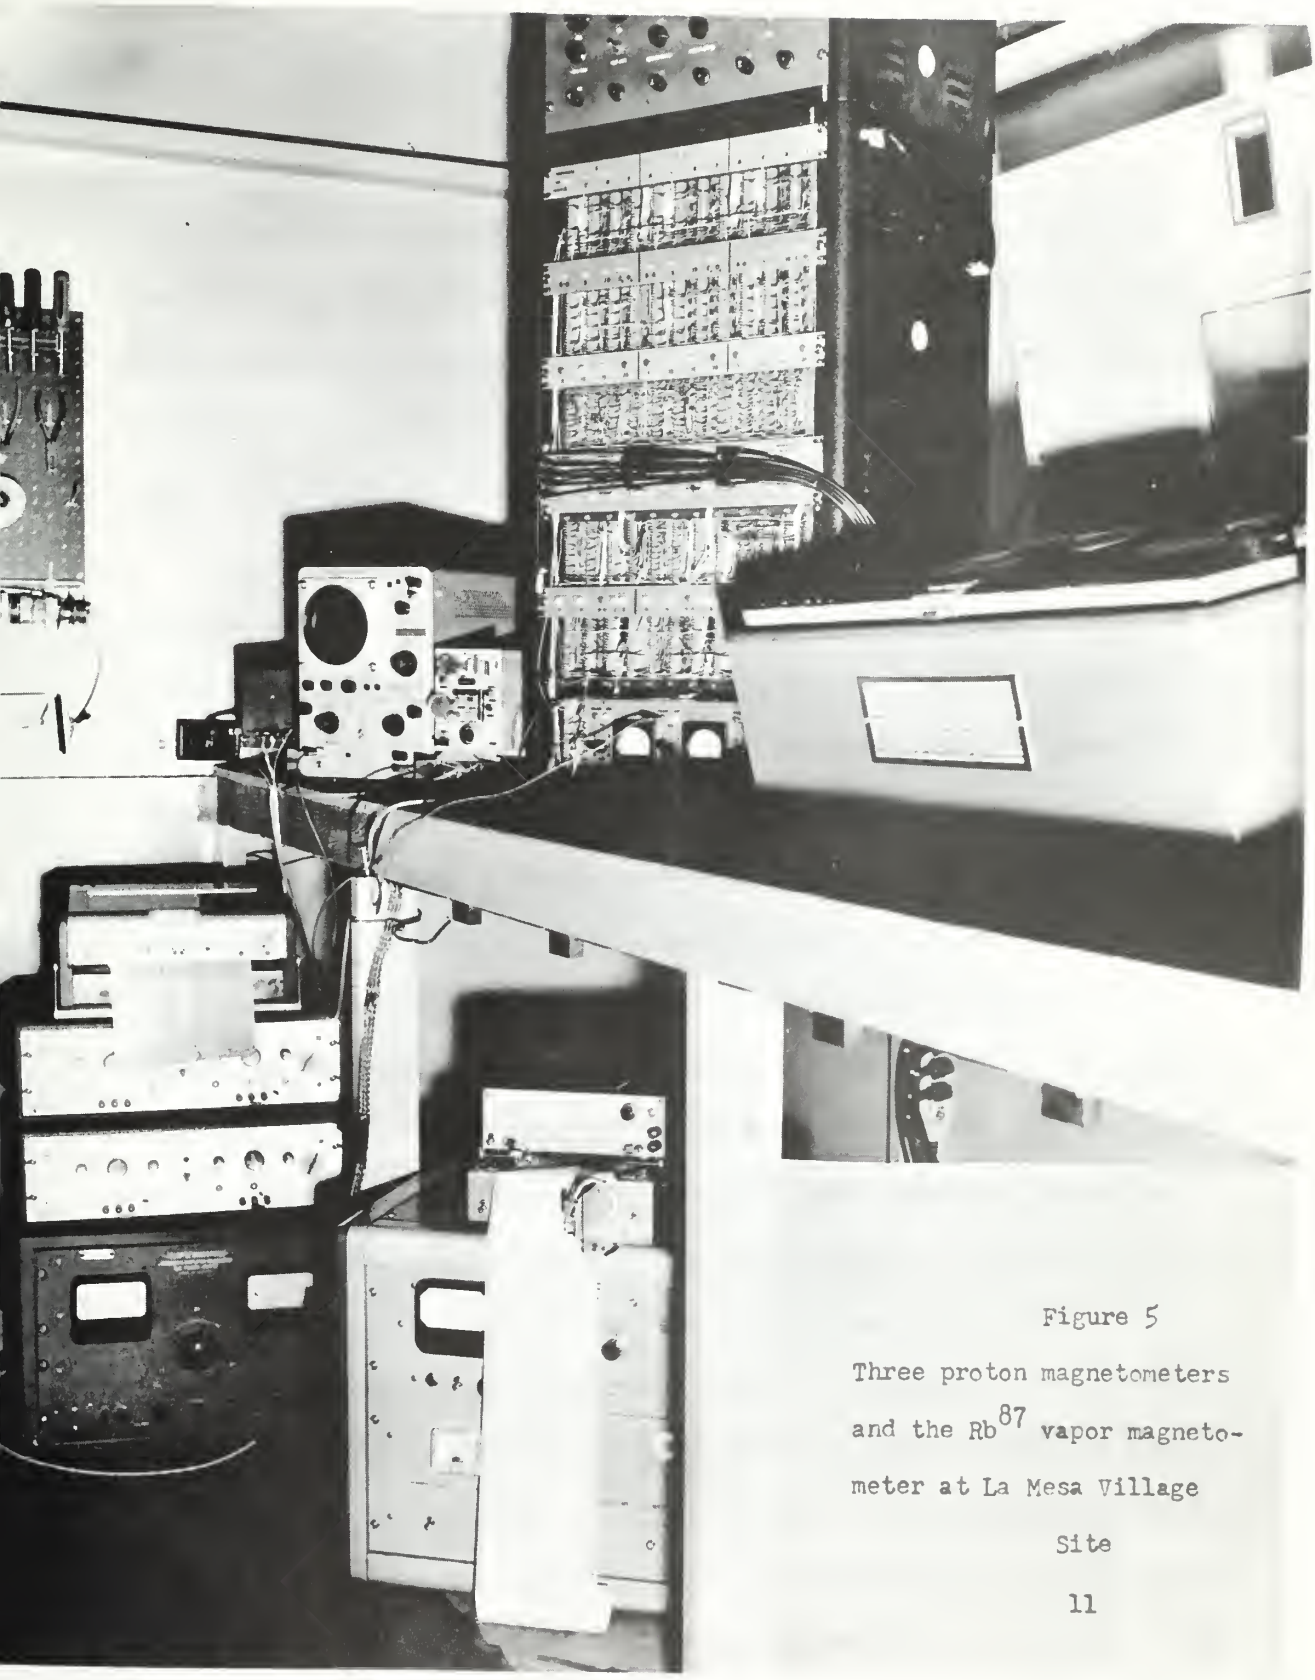

Figure 5

Three proton magnetometers and the Rb^{87} vapor magnetometer at La Mesa Village Site

2.2 Data Aquisition and Processing

Figure 6 shows a block diagram of the data collection and reproduction system.

The scheme used for data handling is certainly not optimum in the sense of tape utilization and ease of operation, but an Ampex CP100 was available and required no additional expenditure for tape recorder. Also with minor modifications a data recorder can be utilized at a later date if funds become available.

Consider the form of the data. The sensing coils are polarized for one second, at the end of this time the polarizing current is turned off, the transients are damped; and the signal is fed to the counting units. After 1024 cycles of the input signal (about 1/2 sec.) the measurement is complete. In the fast counters, there are three binary numbers to be processed. The magnitude of the binary numbers, for H = 50950 γ with clock frequency = 100 kc/s, is about 0013414_{6_8} or 16 bits. With the clock increased to 300 kc/s, the number is 0042526_{0_8} or 18 bits. Hence, at the end of the counting interval, there are 48 bits to be recorded in a format for computer input. The Ampex CP100 is a "portable" instrumentation recorder with 14 parallel inputs and capable of speeds from 1 7/8 ips to 60 ips. All of the record and reproduce amplifiers that were on hand were not capable of recording D.C. levels; therefore, the information was put on tape in the form of pulses. Also, for reasonable speed in reproduction, the data was recorded at 1 7/8 ips and reproduced at 60 ips. A record of approximately 6.5 hours can be reproduced in 10 minutes. The machine used to read the raw data is a CDC160 com-

DATA AQUISITION AND PROCESSING

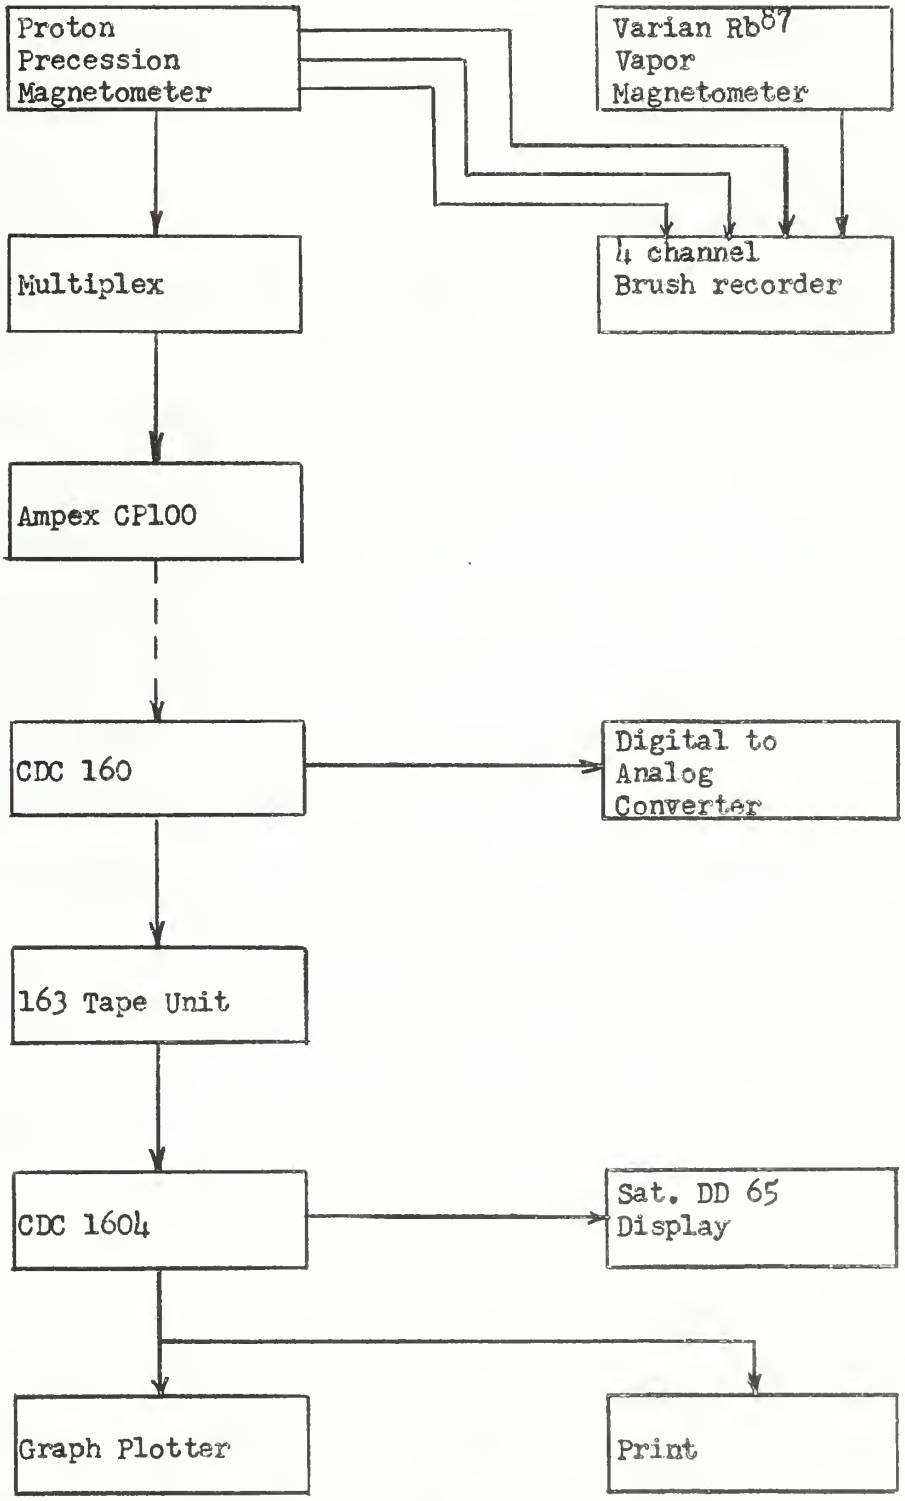

Figure 6

puter capable of reading words of up to 12 parallel bits. The magnetometer words are broken into two, 12 bit words and time multiplexed on tape to satisfy the computer input conditions. Hence, for each sample, there are six 12 bit words to be processed. Even with the time speed up in reproduction the CDC 160 is operating below its capabilities. In an effort to utilize the 160 time, the data was put on tape, so that when it occured, the 160 would read at its maximum rate and use the "no data time" to continue with preliminary processing. Channels 13 and 14 on the tape are input ready and disconnect signals used to control the 160. And of course, for reasonable machine time efficiency, there is on hand enough tape to allow continuous recording for one week.

The Ampex CP100 was not designed specifically for this type of operation; hence the need for an interface to mate it with the 160. The interface must provide the following functions:

a. Convert the pulse type data to D.C. level signals.

b. Put the data on line when a request is supplied from the computer.

c. Effectively disconnect itself from the lines when other equipment is called.

d. Provide control information, i.e. input ready and disconnect for the 160.

e. Effectively isolate the computer from spurious transients from the tape machine. These normally occur during start - stop operations, but the recorder is somewhat susceptible to power line transients and they sometimes appear in its output.

Figures 8, 9 and 10 shows the block diagram of the interface provided. Fig. 11 is a photo of the preliminary processing setup. The cards were assembled and mounted as a component on a laboratory cart, the tape unit is placed on the top of the cart and computer cable connectors provided. This eliminates the need for a permanent rack in the computer laboratory.

The preliminary processing consists of the following:

a. Reading the raw data.

b. Checking the data and keeping a record of the errors.

c. Writing the storage tape.

d. Providing identifying blocks on the storage tape.

e. Searching the storage tape for any particular record or the end of the data so that one storage tape may be used for many week's records.

f. Direct display of the raw data.

The data storage format used is illustrated in Fig. 7.

STORAGE TAPE FORMAT

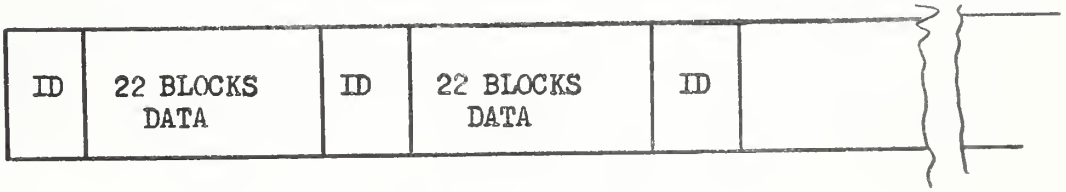

Figure 7

With the time base used there are nearly 38040 twelve bit words per 6.5 hours record. The 6.5 hours record is one 3600 roll of instrumentation tape at 1 7/8 ips. Since the operation is stopped to change tape, it is convenient to put the identifying block at the

TAPE DECK OUTPUT REGISTER

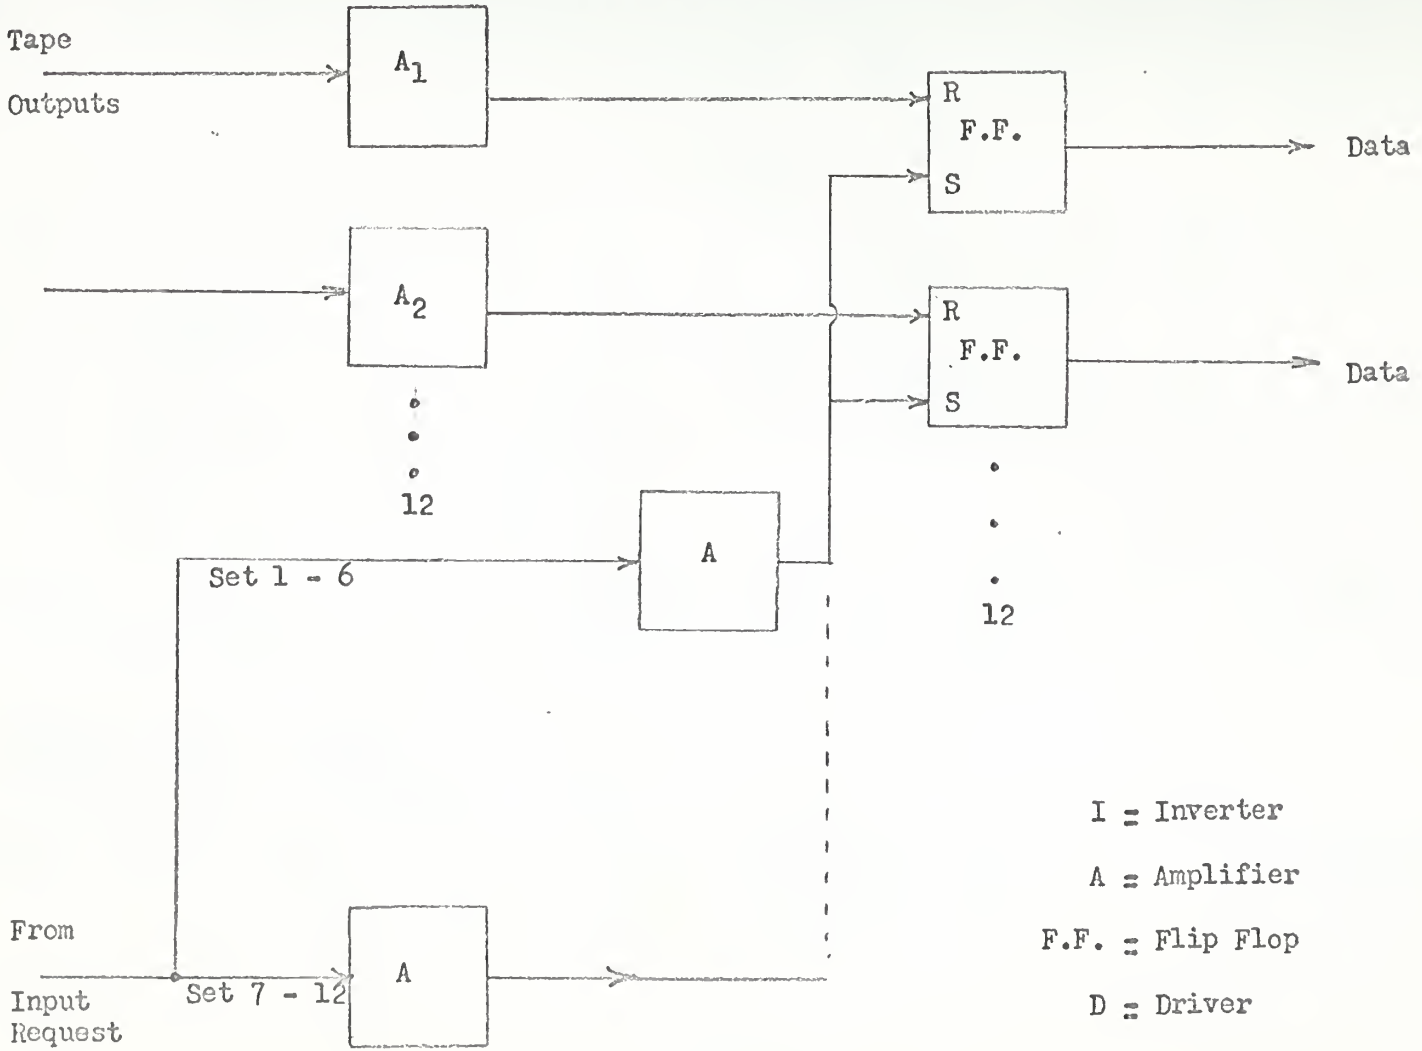

Figure 8

INTERFACE INPUT SECTION

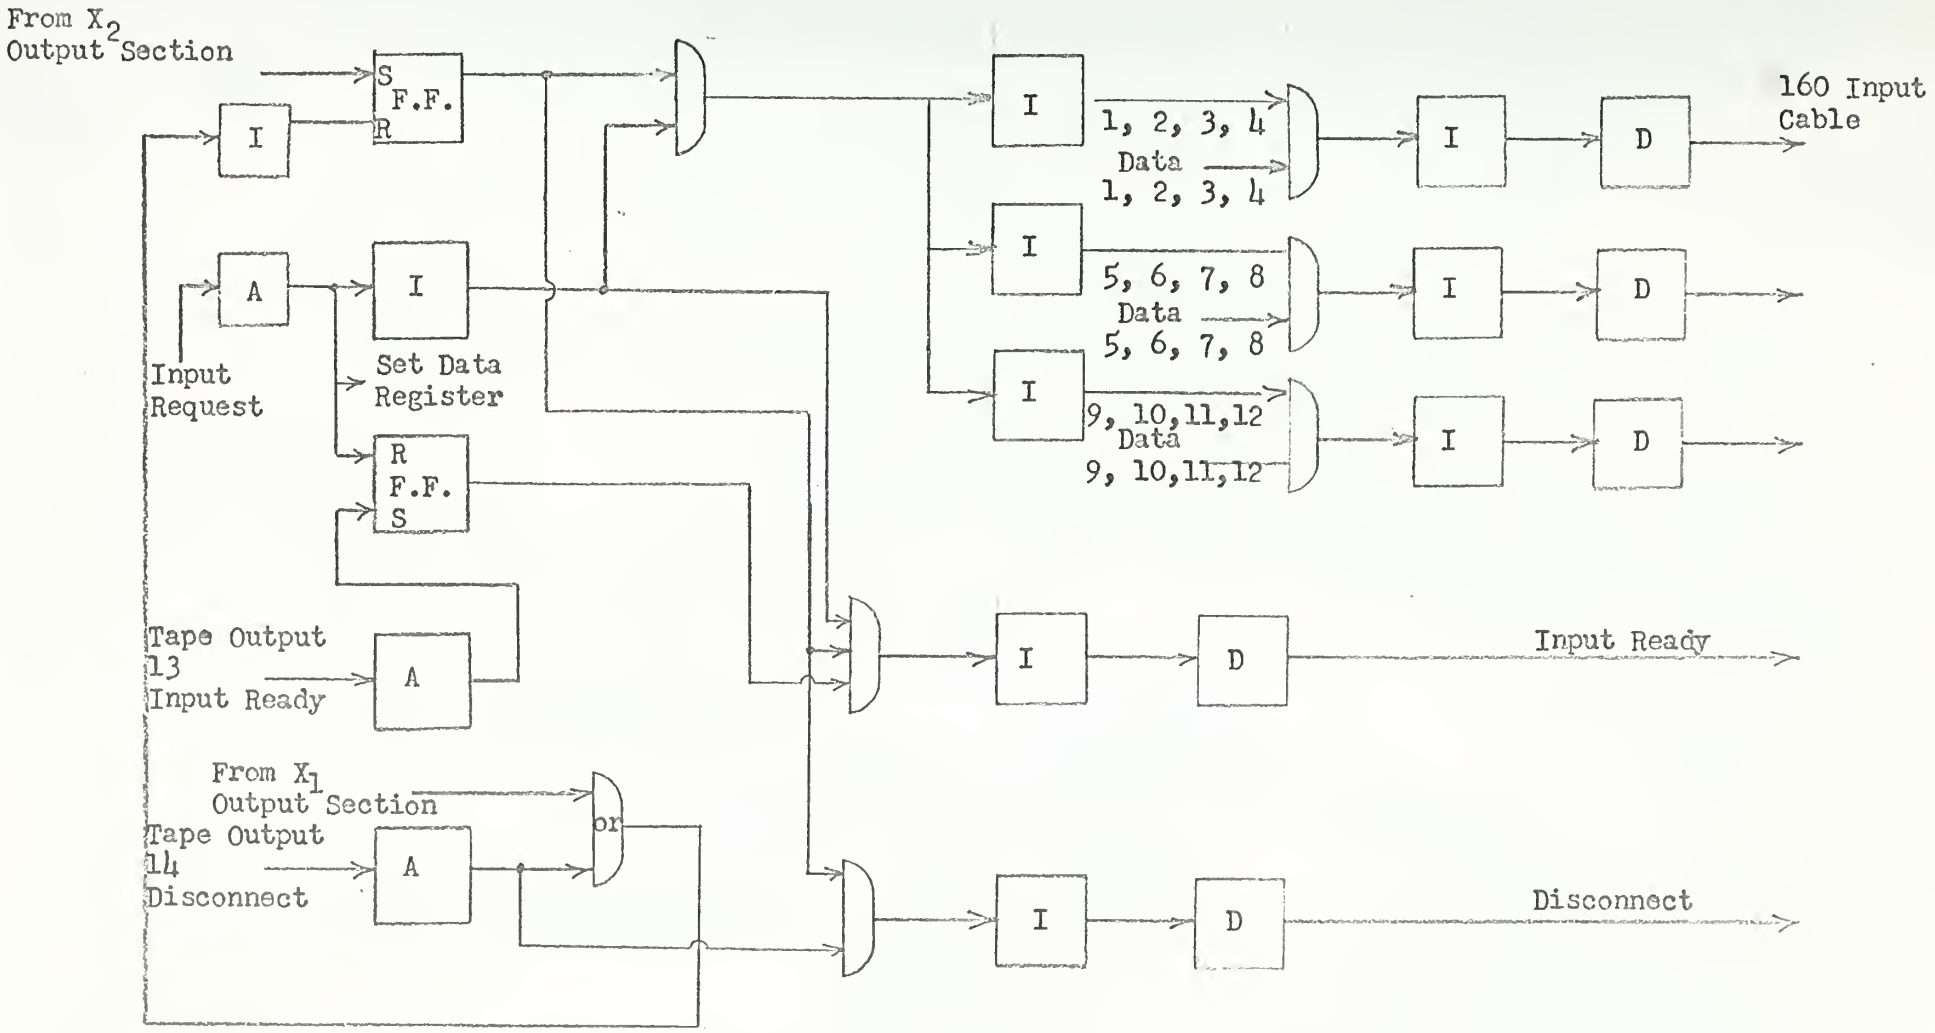

Figure 9

OUTPUT SECTION DECODEING AND RESUME

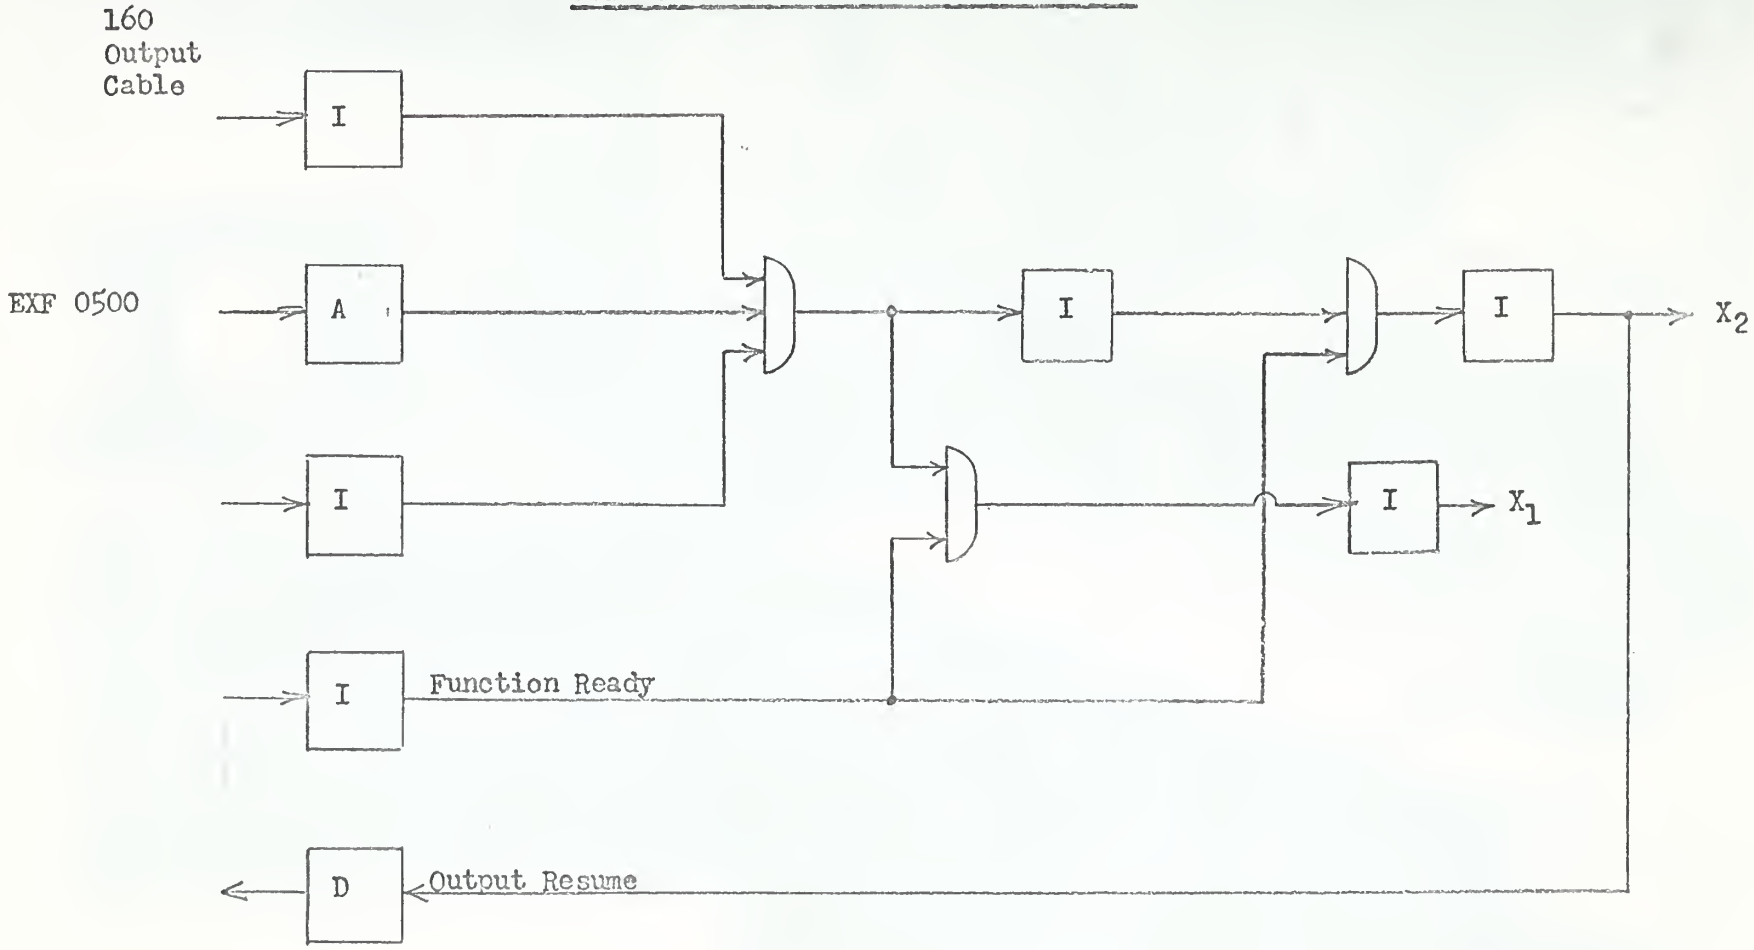

Figure 10

Figure 11

Preliminary Processing Setup

end of this record. Also, this number of data words can be processed in the order of minutes by the CDC1604 so that if the computer is needed for other jobs; it can be stopped at the identifying blocks and return later to the same point with the proper index setting. The block length was set somewhat arbitrarily. The memory storage limit of the 160, write time of the 163 tape unit and suitable records for handling in the 1604, are the factors to be considered when chosing the block length. The instrumentation recorder cannot conveniently be stopped when writing the storage tape; hence one data point is lost when transferring data. This represents 22 points per 6.5 hours record or less than a minute in real time. The block length was chosen to be 3456_{10} twelve bit words per block, the figure being compatable with the above conditions.

The identifying record consists of writing the month, day and year in flex code. The remaining cells of the block are loaded with zeros. It is then easy to separate the data from the identifying blocks since none of the data words will be all zeros.

The fact that the data had to be reconstructed in the 1604 was also considered in chosing the block length. The information is buffered into the 1604 in 48 bit words. The blocks consist of an even number of data points, i.e. six 12 bit or two 48 bit words. After a block is read into the machine and loaded into the A register, the magnetometer readings can be stored sequentially in memory with a loop of a few machine language instructions. The data analysis is then done using Fortran, allowing easy and versatile manipulation of the data. The 160 and 1604 input programs are included in Appendices II and III.

Reassembly is illustrated below.

1604 WORDS

Mag 1 (24 bits)	Mag 2 (24 bits)
Mag 3 (24 bits)	Mag 1 (24 bits)
Mag 2 (24 bits)	Mag 3 (24 bits)

Briefly, the operation is as follows: Magnetometer readings are recorded for long periods of time at a remote site on a protable magnetic tape unit. The tape unit is then returned to the processing site, and using a time speed up of X 32, the intermediate processing is performed and the data stored.

The storage tape along with suitable programs is then placed on file for processing by the computer facility at their convenience. The tape unit is then returned to magnetometer site for more records. The new data obtained is added to the storage tape so as not to destroy the existing data.

3. Data Analysis

The experimental measurement program was set up to study the coherence between the magnetometers, i.e. the comparison of simultaneous samples of the field, with the sensors located at different spatial locations. The coherence was to be examined with various local perturbations in the field. With the target detection objective in mind, the least complicated method of obtaining the target signal will result in the best instrumentation for field use. The problem is somewhat analogous to the radar problem where decisions must be made in the presence of noise, with associated probabilities of error in detection.

There are several types of geomagnetic noise that occur. The most dominant is the diurnal variations. Superimposed on this are smaller variations known as micropulsations and noise caused by local disturbances. Sudden eruptions on the sun sometimes cause large fluctuations in the field. Several studies of the various noises have been made (3), (4) and (5). For the proton precession magnetometer, the instrument produces noise of major contribution to the spectra of small geomagnetic pulsations. For target detection, the signal of interest will most likely be of the same order of magnitude as the small micropulsations and local distrubances. For geophysical prospecting and mapping, the signals will be much larger.

As with any raw data, there will be some points that are obviously in error. The cause of errors is usually uncertain, but some provision must be made in the processing to eliminate these errors so as not to distort the data. Care must be taken when performing

these operations so the target signals are not masked. Records of the errors should be kept in order that decisions about the usefulness of the set of data can be made.

The problem of coherence between the spatial samples requires that the instrument noise be determined, with an ideal signal, then measurements be conducted with no local perturbations in the field, and the samples compared. The simplest comparison is to plot the difference signal vs. time. With no local perturbation, this means essentially a plot of the system noise vs. time; hence the need for filtering is obvious. To use this method for target detection will require serious consideration of the filter time constants.

The types of filtering

1. A clipping filter (on the raw data) that clipped at $\pm$ 200 γ. The number of points outside of this range are recorded. This range was about twice the expected diurnal variation. The filter removes the errors from lost high order bits and other instrument sources. The typical error rate was about 1/50000.

2. A simple three point average for display of the raw data on the DD 65 display unit was used. This gives an operator a fast visual display of the raw data. Decisions can then be made about the quality of the data.

3. Eighteen point averaging, i.e. 36 seconds real time, gave partially smoothed 6.5 hours graph records.

4. A simple single section low pass filter was used of the form $1/(s - a)$. The time constant was set at 100 sec. and 20 min. in real time. The implementation was done using Z transform (6).

The filter design was done by Professor Harold A. Titus.

We have

$$\frac{X_o(S)}{X_{in}(S)} = \frac{a}{s - a}$$

which has a Z transform

$$\frac{X_o(Z)}{X_{in}(Z)} = \frac{\beta}{1 - e^{-aT} Z^{-1}}$$

In block diagram form this is seen in Fig. 29

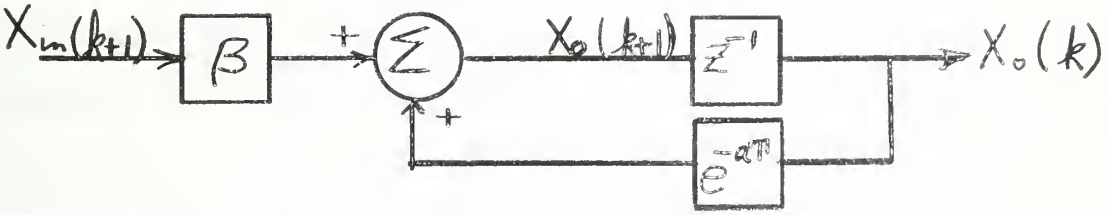

Figure 29

In terms of the discrete time samples we have

$$X_o(k+1) = \beta \sum_{n=0}^{k} e^{-anT} X_{in}(k+1-n)$$

$$\beta = 1 \Big/ \sum_{n=0}^{k} e^{-anT}$$

T = sample period

a = time constant

The function was trunkated at n = 20 for values of k > 20. The contribution to the filtered value from the terms multiplied by e^{-anT} for n > 20 is negligible.

The coherency is a statistical parameter, and must be represented as such.

Let:

$$\Delta_1 = H_1 - H_2$$

$$\Delta_2 = H_1 - H_3$$

$$\Delta_3 = H_2 - H_3$$

The differences of the unfiltered values were grouped in a frequency distribution which approximates the continuous density function for large sample size. Since the process is digital, the allowable differences, in bits are: $0, \pm 1, \pm 2, \pm \cdots$. Therefore, the frequency distribution is not a smooth curve. Since the instrument noise is randomly distributed, the envelope of the distribution is a normal density function. The mean was removed before plotting, and the statistic representing the standard deviation was computed according to:

$$S = \frac{1}{N} \sqrt{\sum_{i=1}^{N} (\Delta_i - \bar{\Delta})^2}$$

where: N = the number of samples in a 6.5 hour record.

Comparison of the density function curve with an ideal signal input to that of magnetometer input gives a measure of the noise produced by the device.

To further define the coherence, the auto and cross correlation functions were computed and the coherency computed as defined:

$$cch_{11} = \frac{\phi_{12}}{\sqrt{\phi_{11}\ \phi_{22}}}$$

where:

$$\phi_{12}(\tau) = \lim_{T \to \infty} \int_{-T/2}^{T/2} x(t)\, y(t+\tau)\, dt$$

and

$$\phi_{11}(\tau) = \lim_{T \to \infty} \int_{-T/2}^{T/2} x(t)\, x(t+\tau)\, dt$$

This discrete computational form is

$$C_{xy}(\tau) = \frac{1}{N-m} \sum_{p=1}^{N-m} x_p\, y_{p+\tau}$$

and

$$C_{xx}(\tau) = \frac{1}{N-m} \sum_{p=1}^{N-m} x_p\, x_{p+\tau}$$

where:

N = number of data values

n = number of lags

$\tau = n \Delta t$

Since the functions are from finite time series n_{max} can only be made about 0.1 N. The 6.5 hour records will vary in form depending upon the time of day the records were made. Therefore, the correlation

functions will not be the same shape for each record; however the coherence function as defined will be the same, and for perfectly coherent records is unity. The programs are included in Appendix III.

It should be pointed out that when perturbations are placed in the field, the basic assumptions regarding correlation; i.e. a stationary random process, are no longer applicable.

Experimental data was taken to determine typical signatures for elementary perturbations. Fig. 12 shows the geometry of the detector centered coordinate system.

PERTURBATION EXPERIMENT GEOMETRY

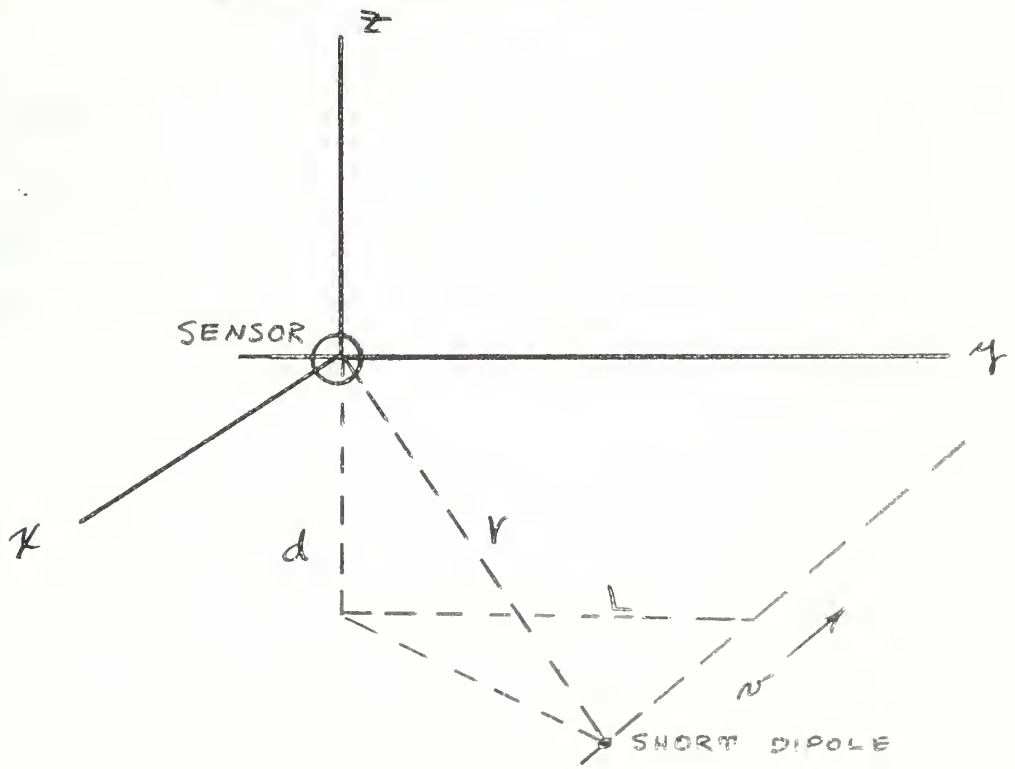

Figure 12

The dipole moment was orientated parallel to the earth's field and its motion was in the x direction such that dx/dt = constant. The approximation $r \gg 1$ is valid.

At the detector:

$$H = \sqrt{Ho^2 - Hp^2}$$

And:

$$Hp = \frac{K\,M}{r^3}$$

where:

M = dipole moment

r = function of time and the geometry

K = constant

No attempt was made at this time to compare the measured values with the theoretical values, because the terrain does not lend itself keeping L, d, and v constant. The results are representative of typical signatures that would be found in practice.

4. Results

4.1 Instrumentation:

An ideal signal was substituted for the procession signal and set of records were made, as shown in Figs. 13 through 25. The graph scales were left unchanged because it was desired to show the instrument errors on the same scale as the magnetic field scales. The magnetic field vs. time graphs were not included because the input signal was an audio oscillator and only a small drift puts it off the graph scale. The clock was 300 kc/s which makes 1 bit = 0.36 γ.

Figure 28 shows the precesion signal from the various sensors. Figs. 26 and 27 are typical plots made from the analog section of the instrument. For comparison, the Rb^{87} magnetometer output was adjusted to the same scale and plotted on the same graph. The Rb^{87} magnetometer output is an analog of frequency, while the proton magnetometer the analog is of period; hence the reason for the opposite drift on the chart. Figure 27 is an analog record of the differences. The filter was a single section RC filter with time constant = 10 sec. On the multiple curve plots showing coherence, the curves are identical and cannot be distinguished from each other. These curves can be compared with the curves obtained from the sensor with no local perturbations in the field, for the contribution of the measuring instrument noise to the total noise.

Difficulties with both instrumentation and computer tape have been encountered. The use of new computer tape for data storage and scratch tapes, and frequent head cleaning of the instrumentation recorder reduced the difficulties to a minimum.

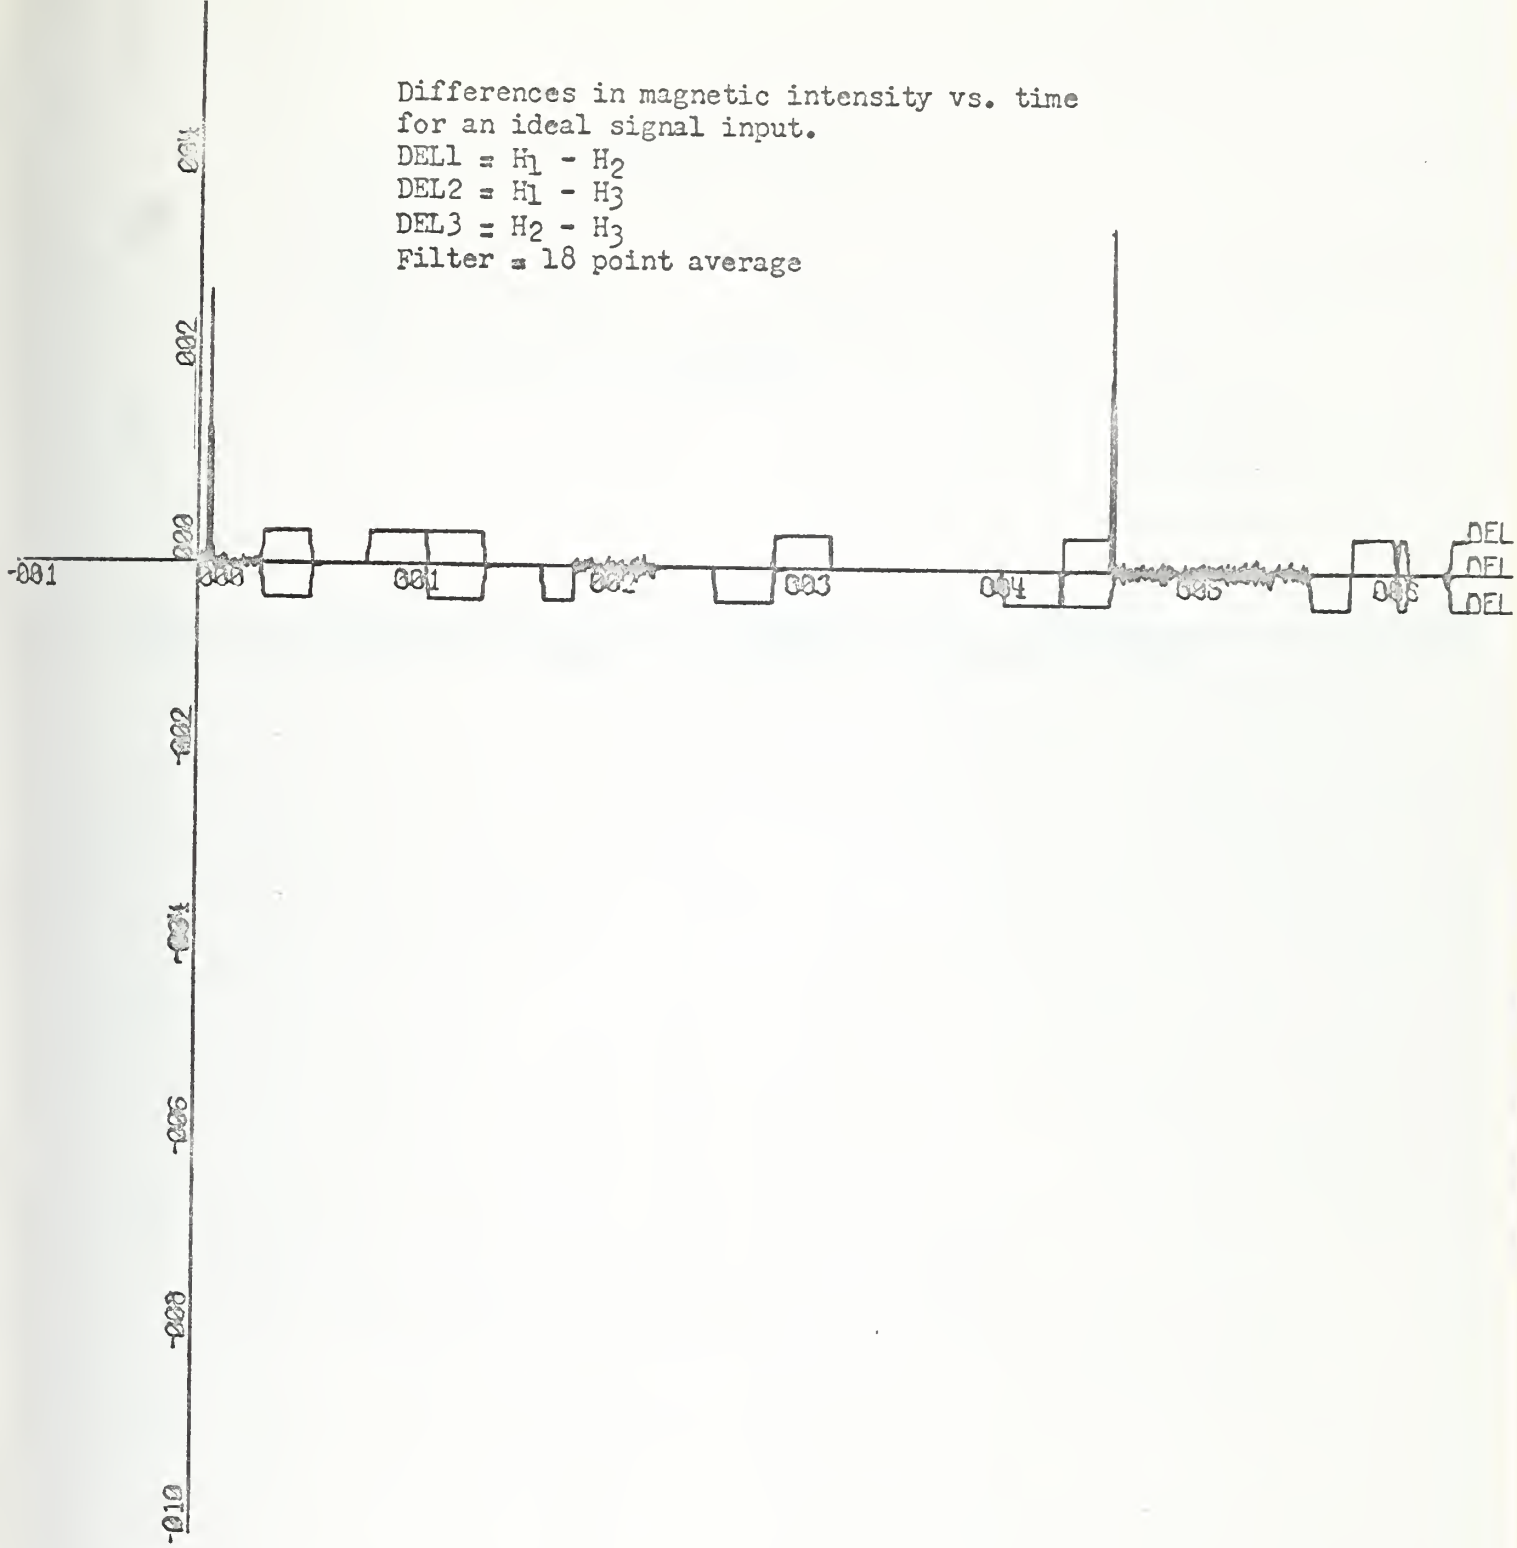

Figure 13

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 2.00E+00 UNITS/INCH.

ANDERSON BOX 263
FIRST DIFFERENCE IN MAG FIELD T IN HRS H GAMMA

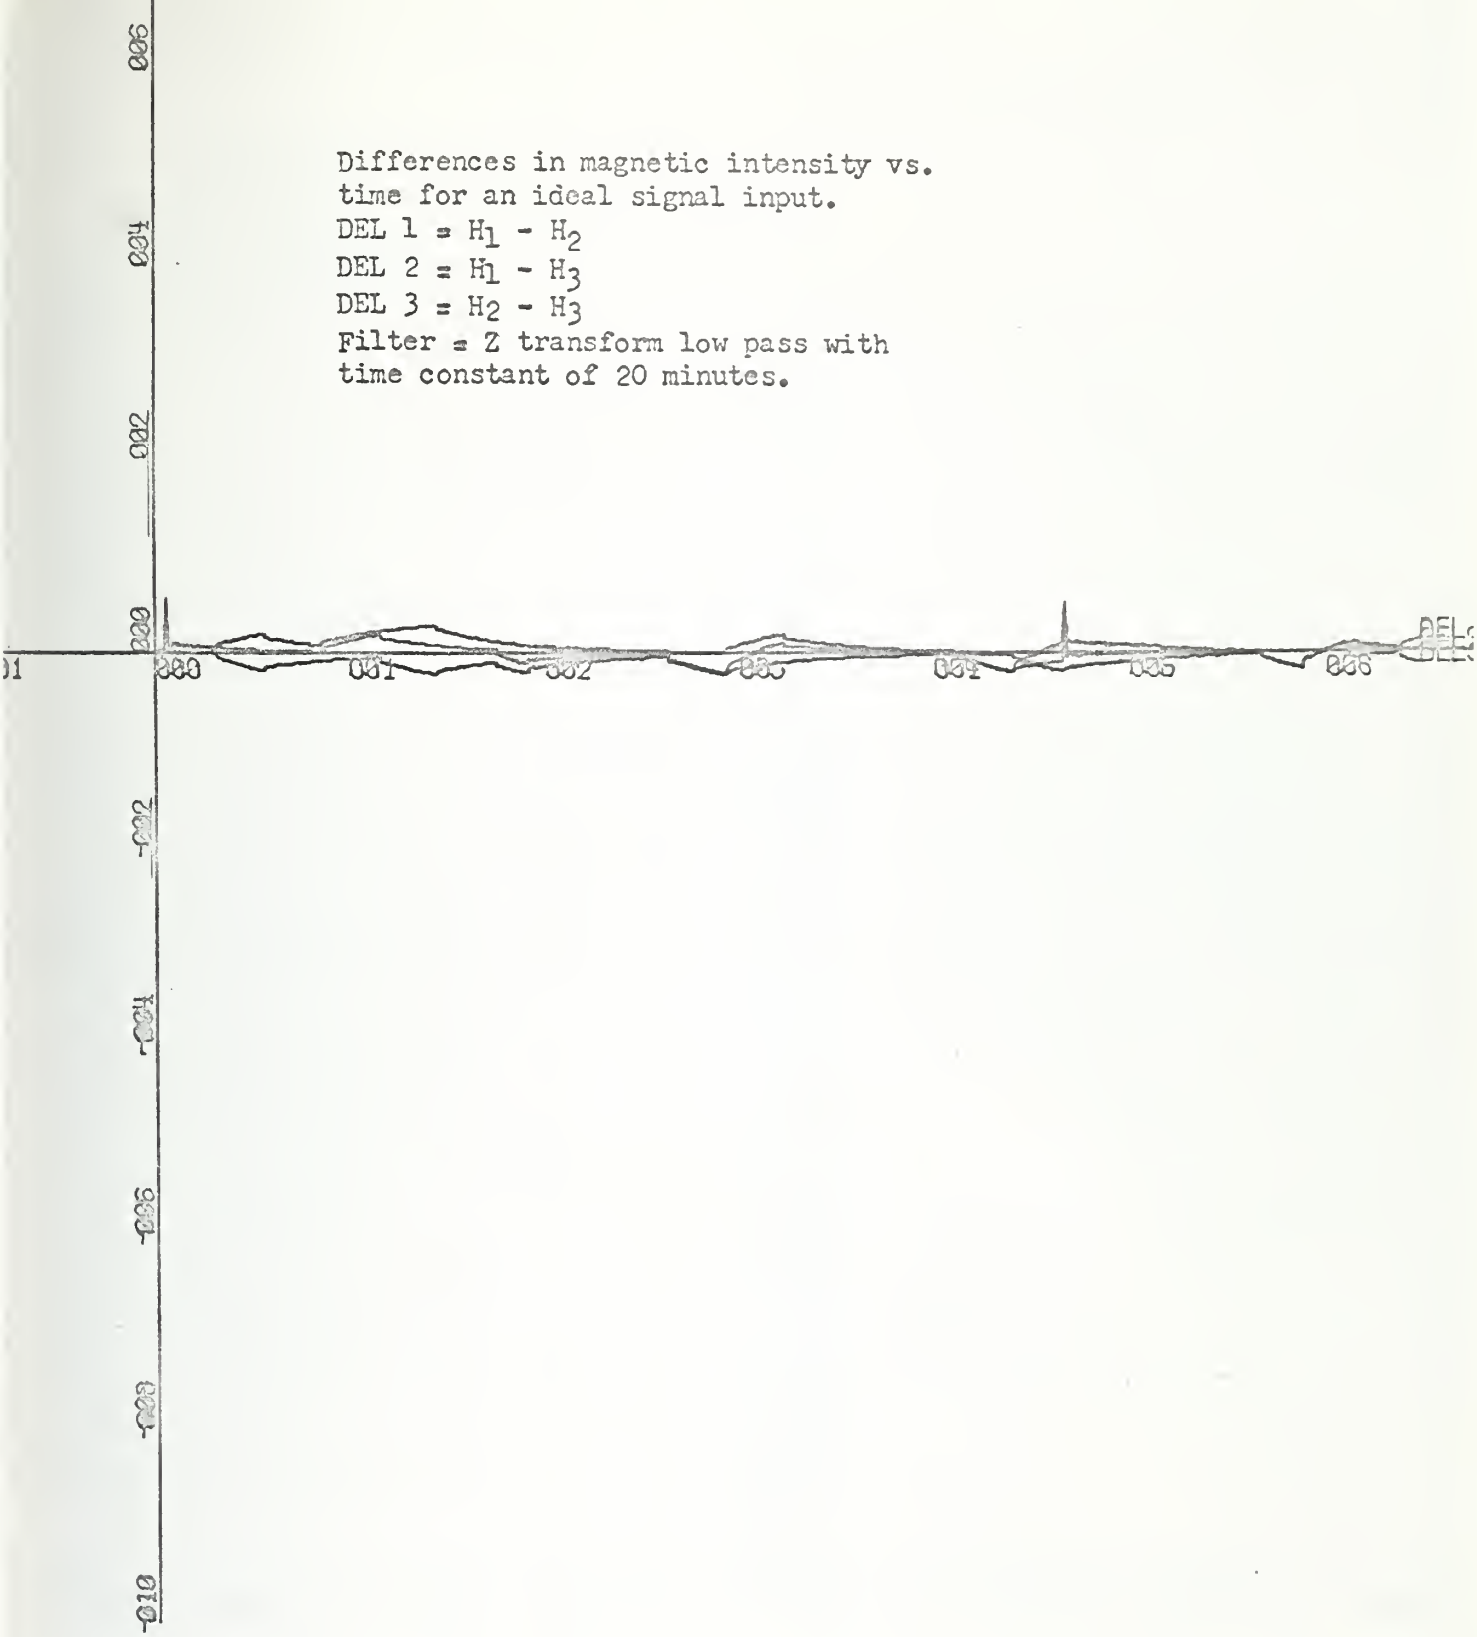
Differences in magnetic intensity vs.
time for an ideal signal input.
DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$
Filter = Z transform low pass with
time constant of 20 minutes.
X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 2.00E+03 UNITS/INCH.
ANDERSON FILTER
FILTEREDDIFFERENCE IN MAG FIELD T IN HRS H GAMMA

Figure 14

Normalized density function for the difference $H_1 - H_2$ - mean $(H_1 - H_2)$, with an ideal signal input.
Mean = 0.061 gamma
Standard deviation = 0.21

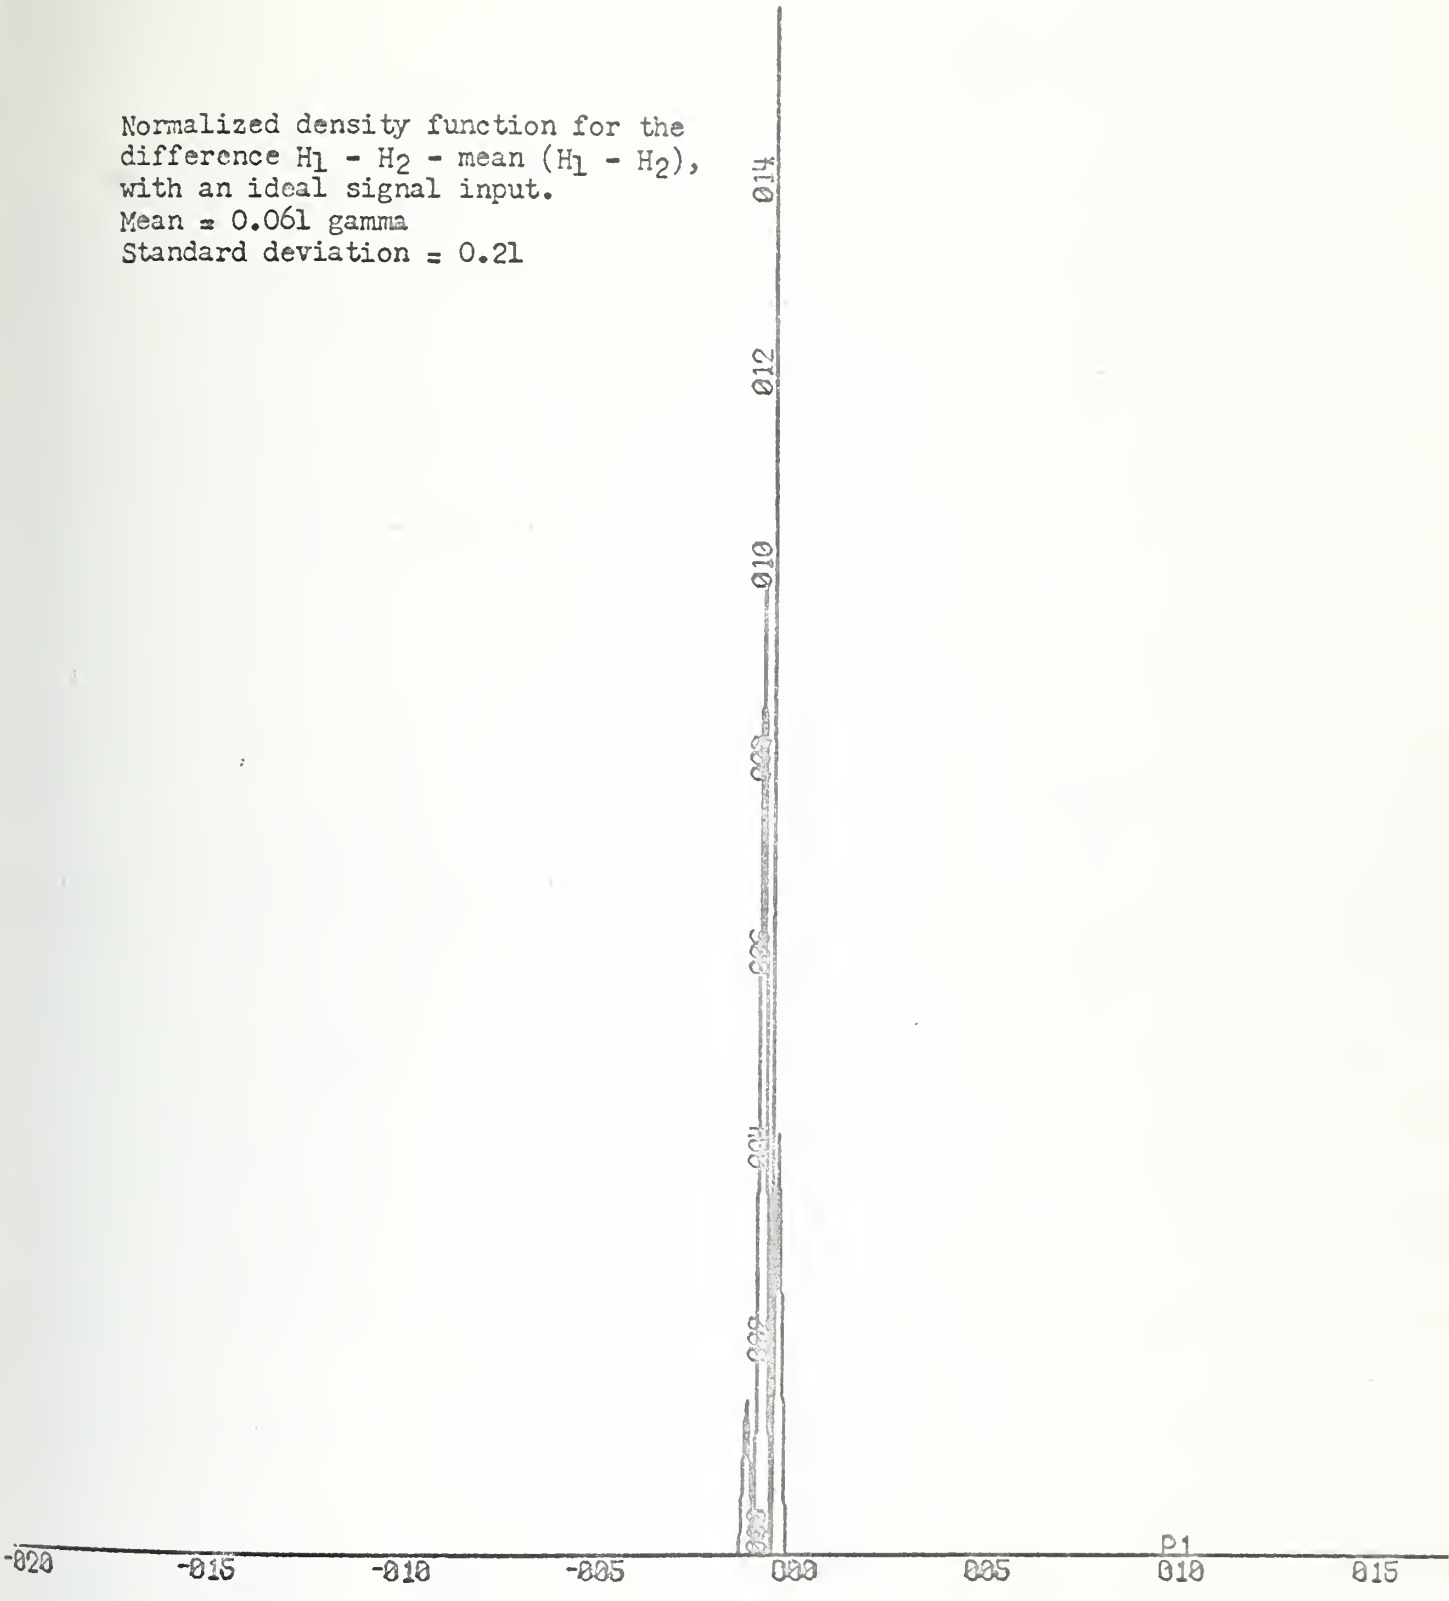

Figure 15

X-SCALE = 5.00E+00 UNITS/INCH.
Y-SCALE = 2.00E-01 UNITS/INCH.
ANDERSON BOX 263
DENSITY FUNCTION X IN GAMMA Y IN FREQ

Normalized density function for the difference $H_1 - H_3$ - mean ($H_1 - H_3$), with an ideal signal input.
Mean = 0.056 gamma
Standard deviation = 0.72

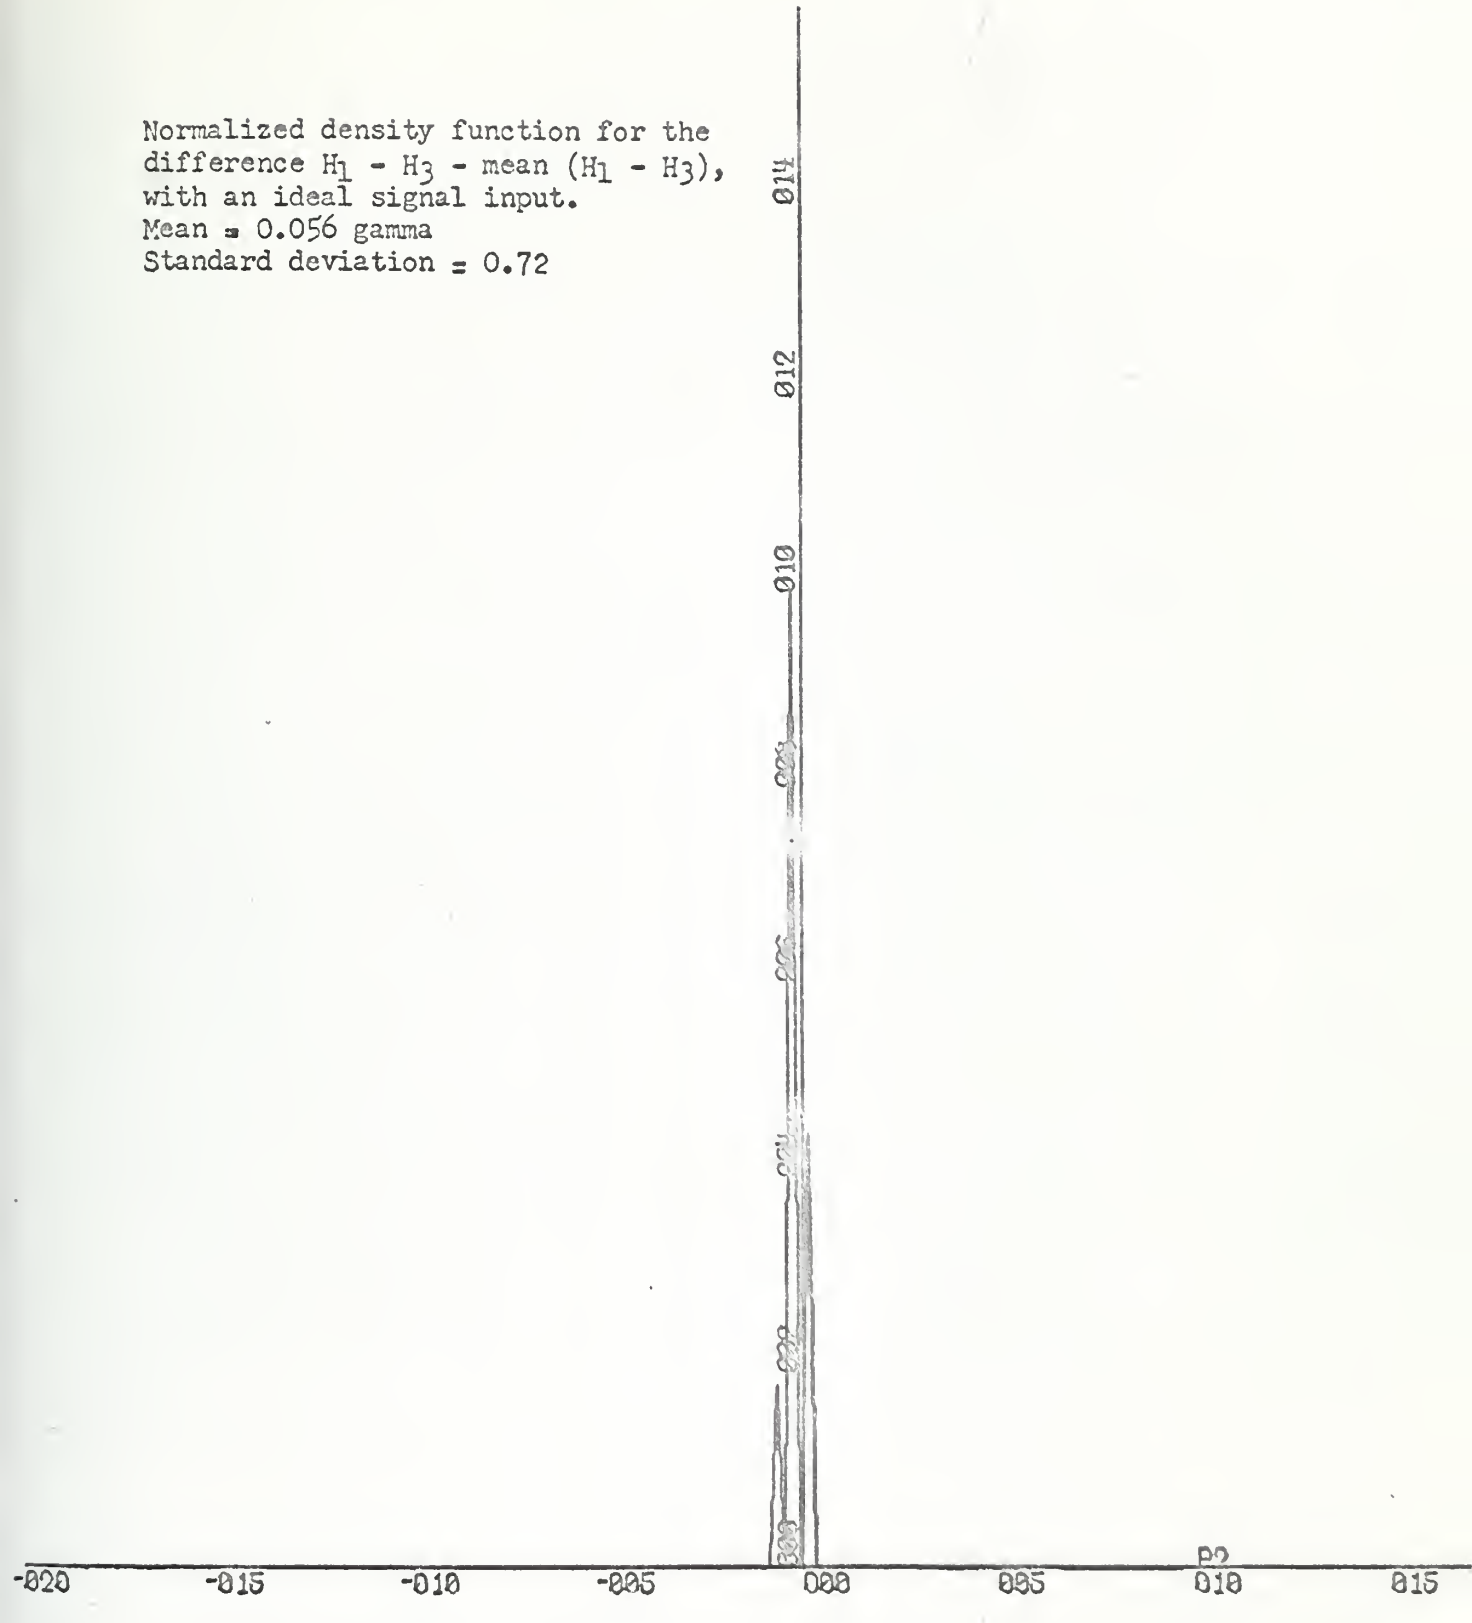

Figure 16

X-SCALE = 5.00E+00 UNITS/INCH.
Y-SCALE = 2.00E-01 UNITS/INCH.
ANDERSON BOX 263
DENSITY FUNCTION X IN GAMMA Y IN FREQ

Normalized density function for the difference $H_2 - H_3$ - mean $(H_2 - H_3)$, with an ideal signal input.
Mean = -0.0055 gamma
Standard deviation = 0.72

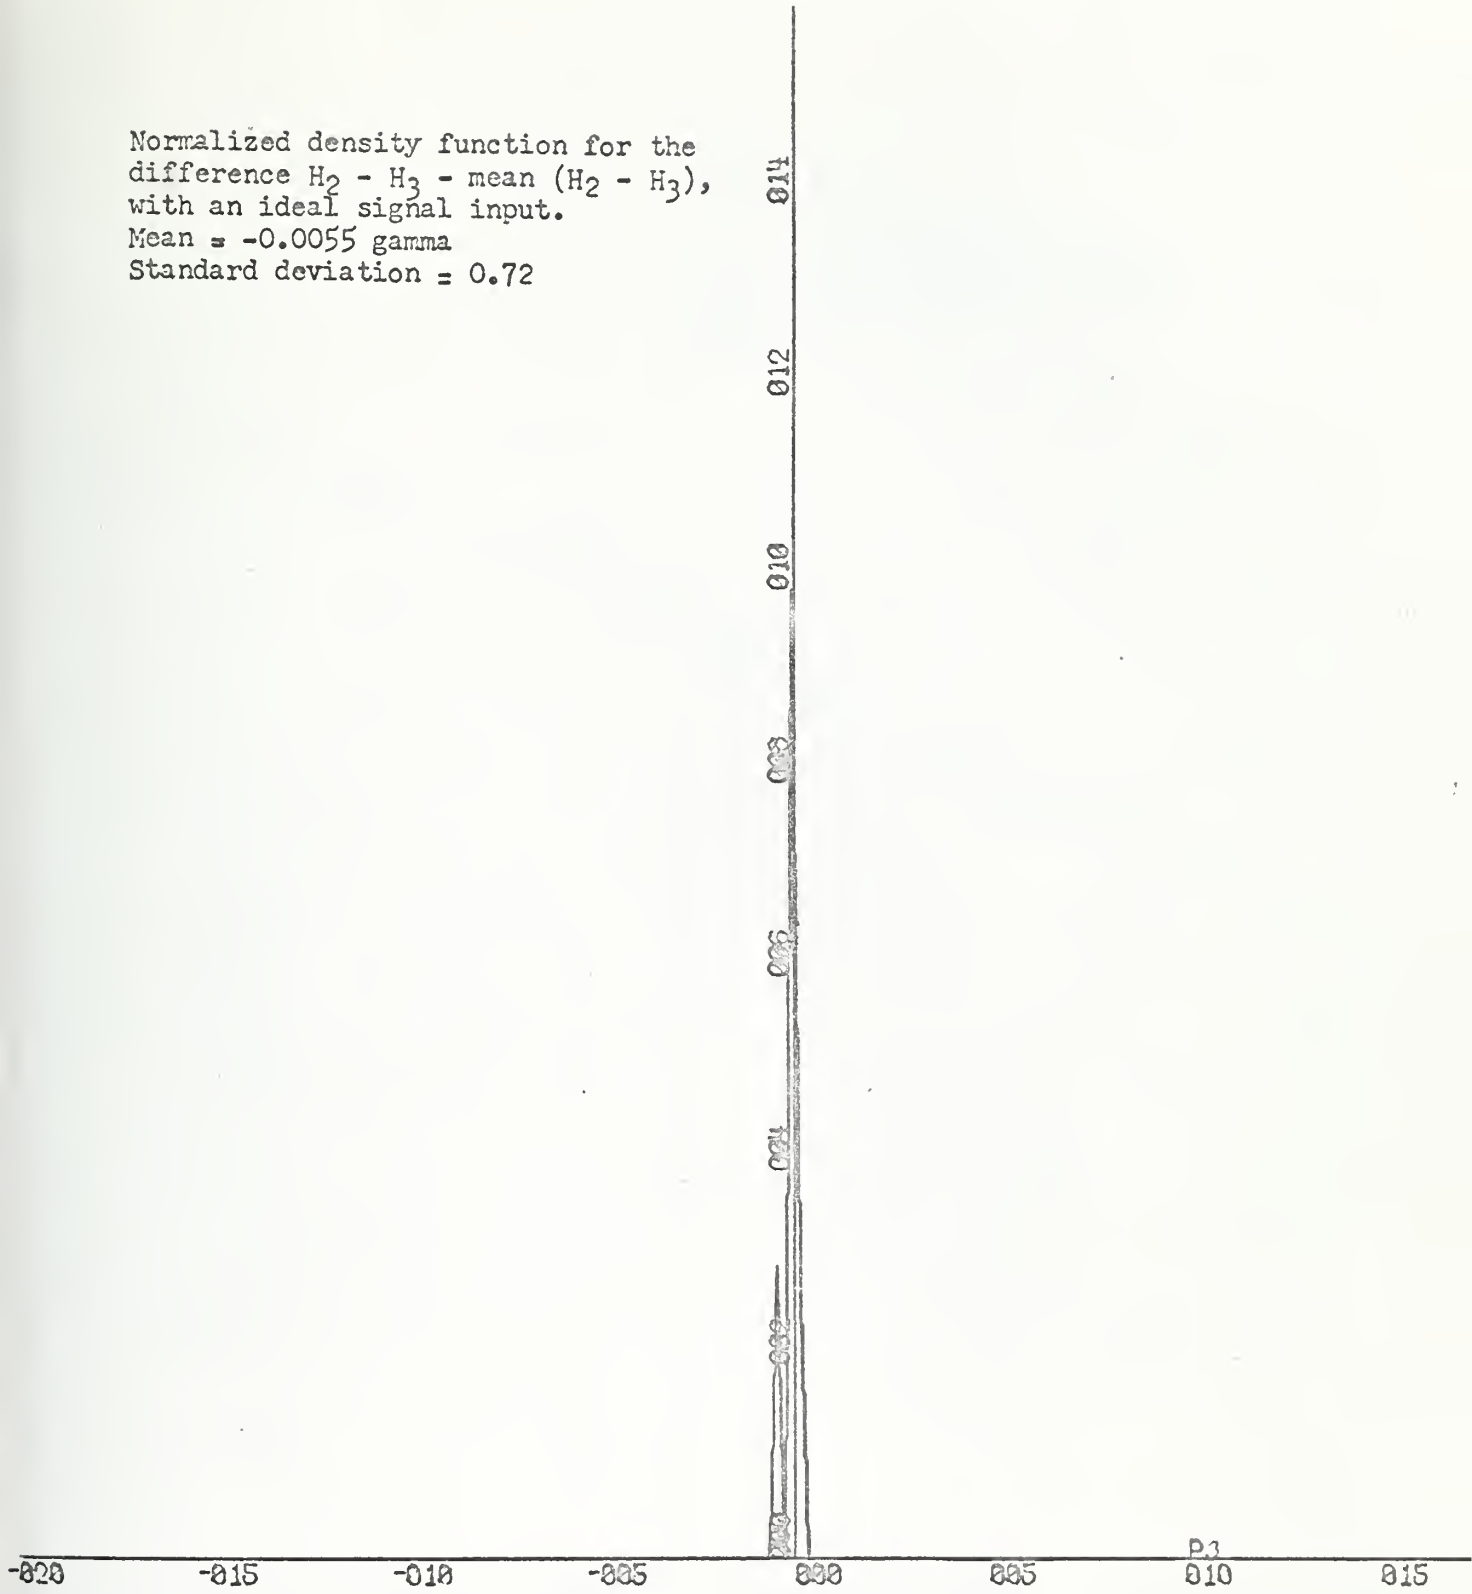

Figure 17

X-SCALE = 5.00E+00 UNITS/INCH.
Y-SCALE = 2.00E-01 UNITS/INCH.

ANDERSON BOX 263
DENSITY FUNCTION X IN GAMMA Y IN FREQ

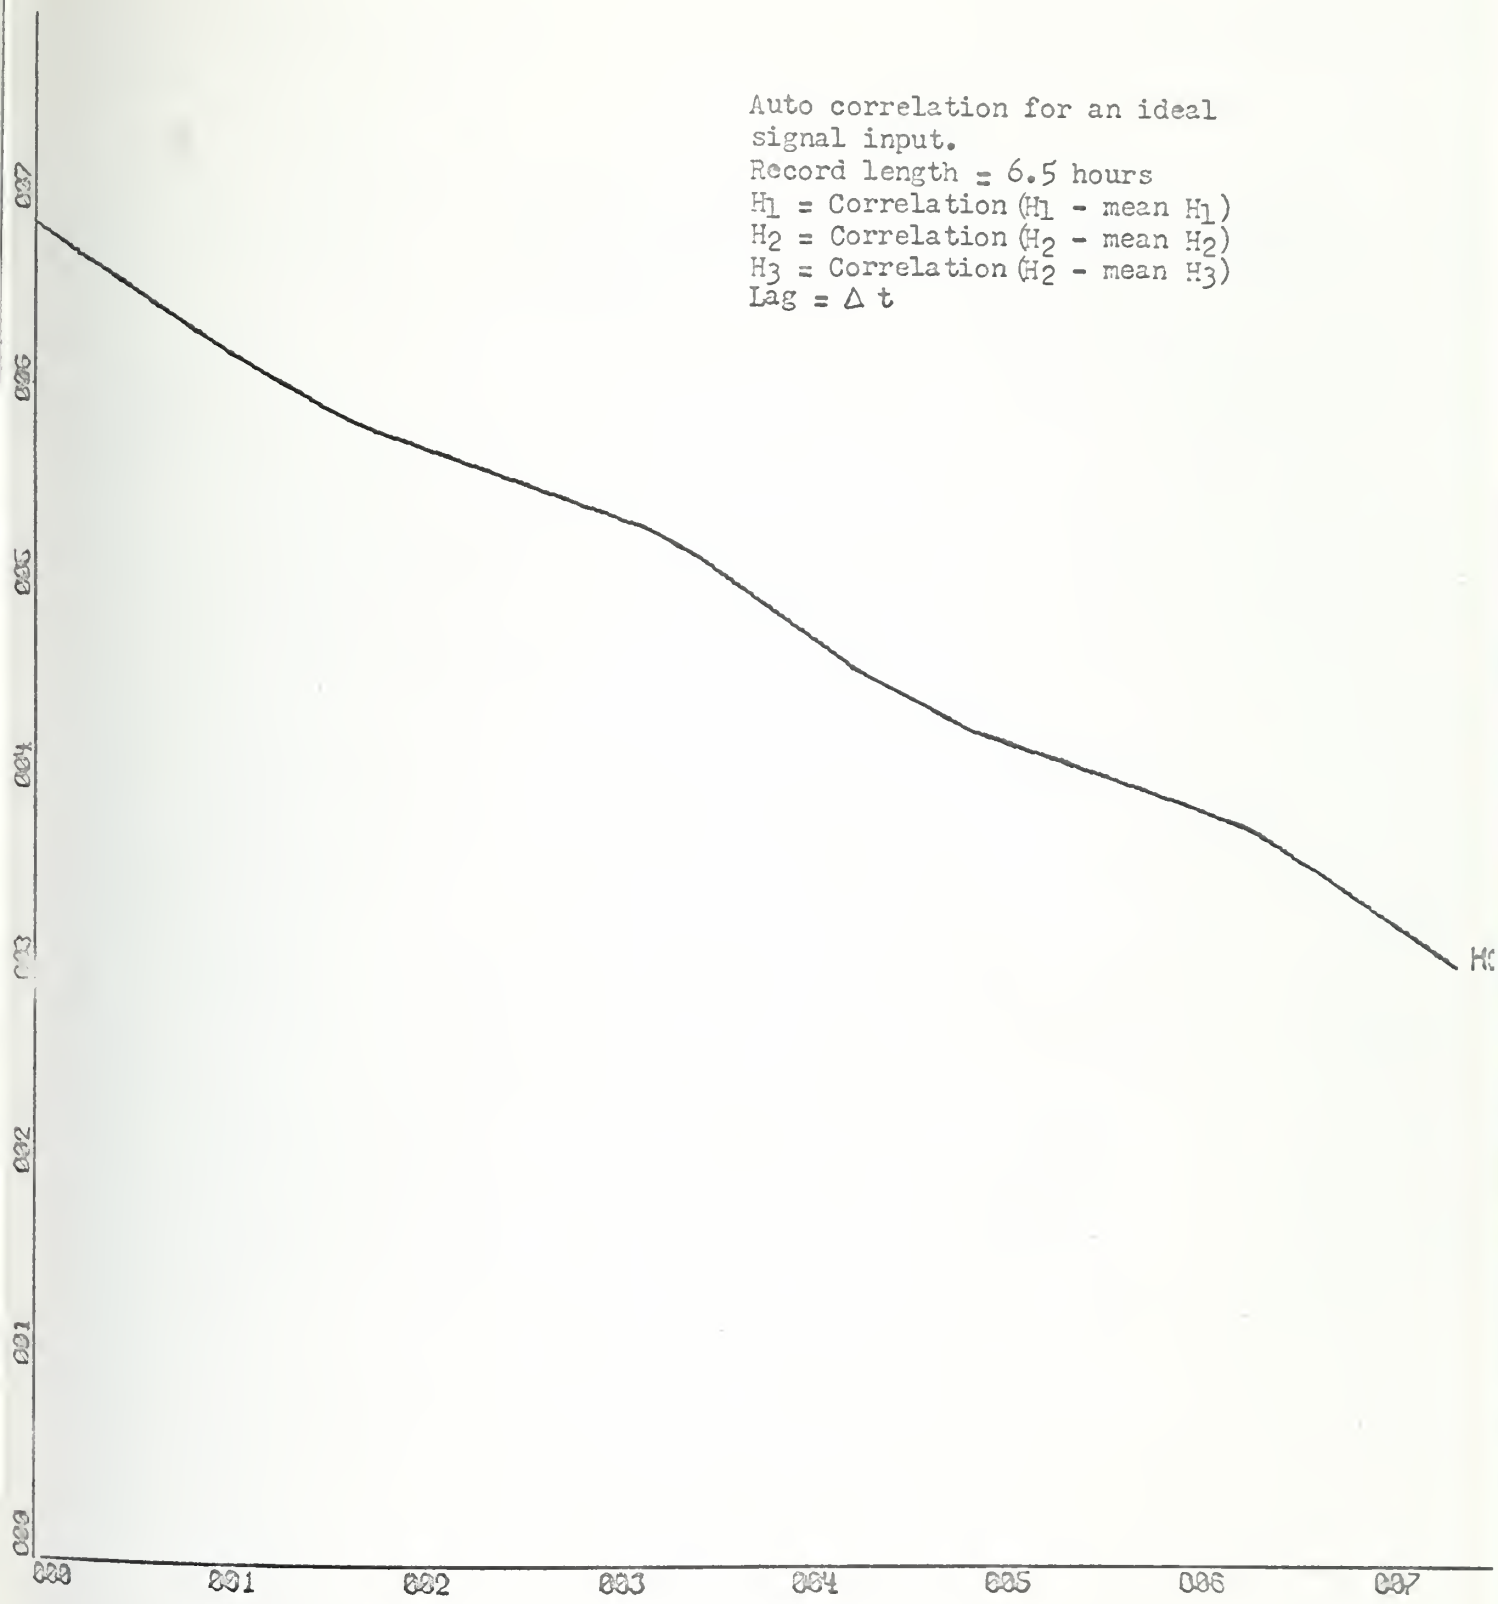

Figure 18

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 1.00E+04 UNITS/INCH.

ANDERSON BOX 263
AUTOCORRELATION FUNCTION Y IN PRODUCTS X IN LAGS

Cross correlation for an ideal signal input.
Record length = 6.5 hours

H_{12} = Correlation (H_1 - mean H_1 and H_2 - mean H_2)
H_{13} = Correlation (H_1 - mean H_1 and H_3 - mean H_3)
H_{23} = Correlation (H_2 - mean H_2 and H_3 - mean H_3)
Lag = Δ t

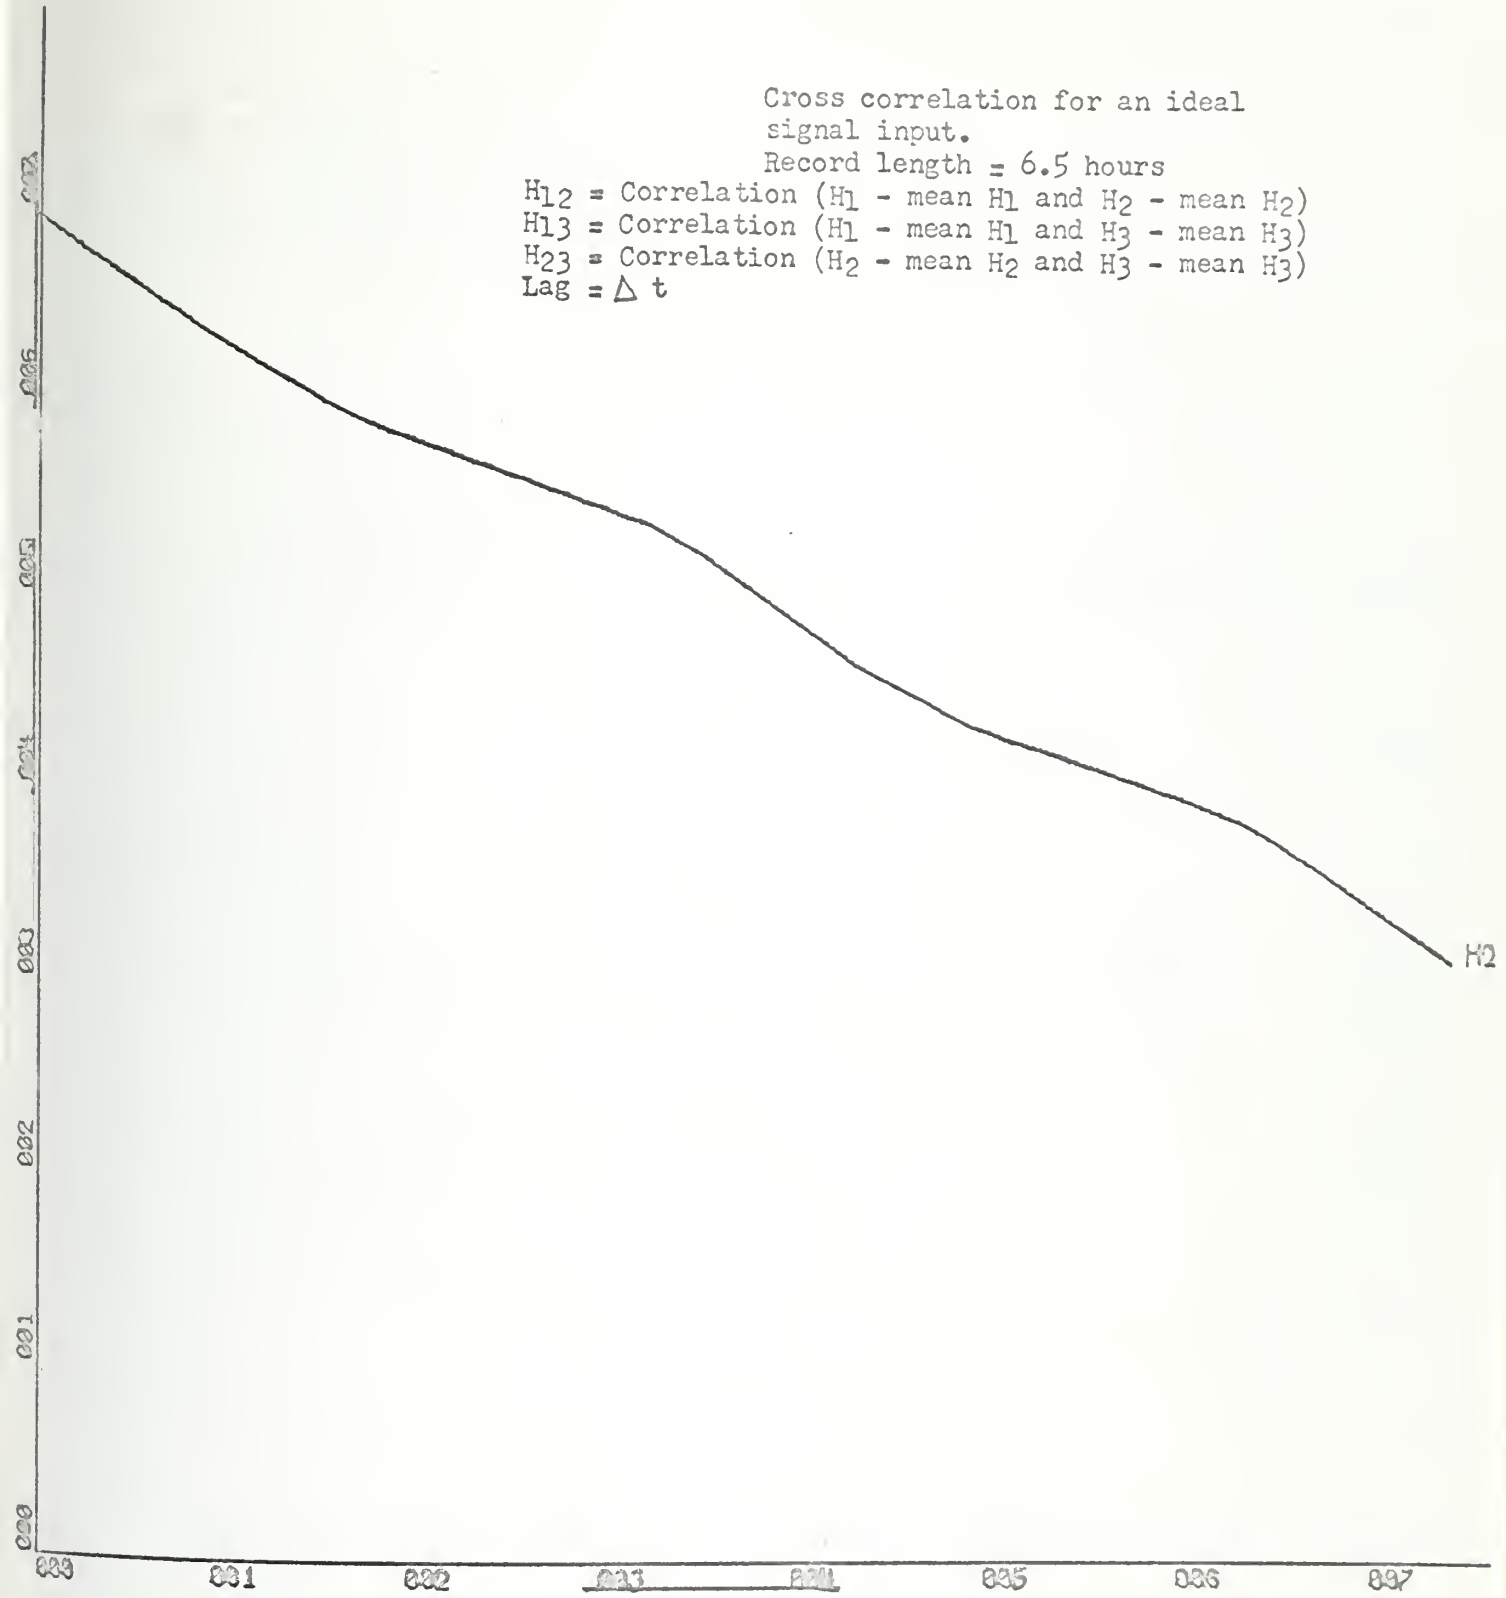

Figure 19

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 1.00E+04 UNITS/INCH.
ANDERSON BOX 263
CROSCORRELATION FUNCTION Y IN PRODUCTS X IN LAGS

Coherence for an ideal signal input
Record length = 6.5 hours
H_{12} = Coherence of H_1 and H_2
H_{13} = Coherence of H_1 and H_3
H_{23} = Coherence of H_2 and H_3

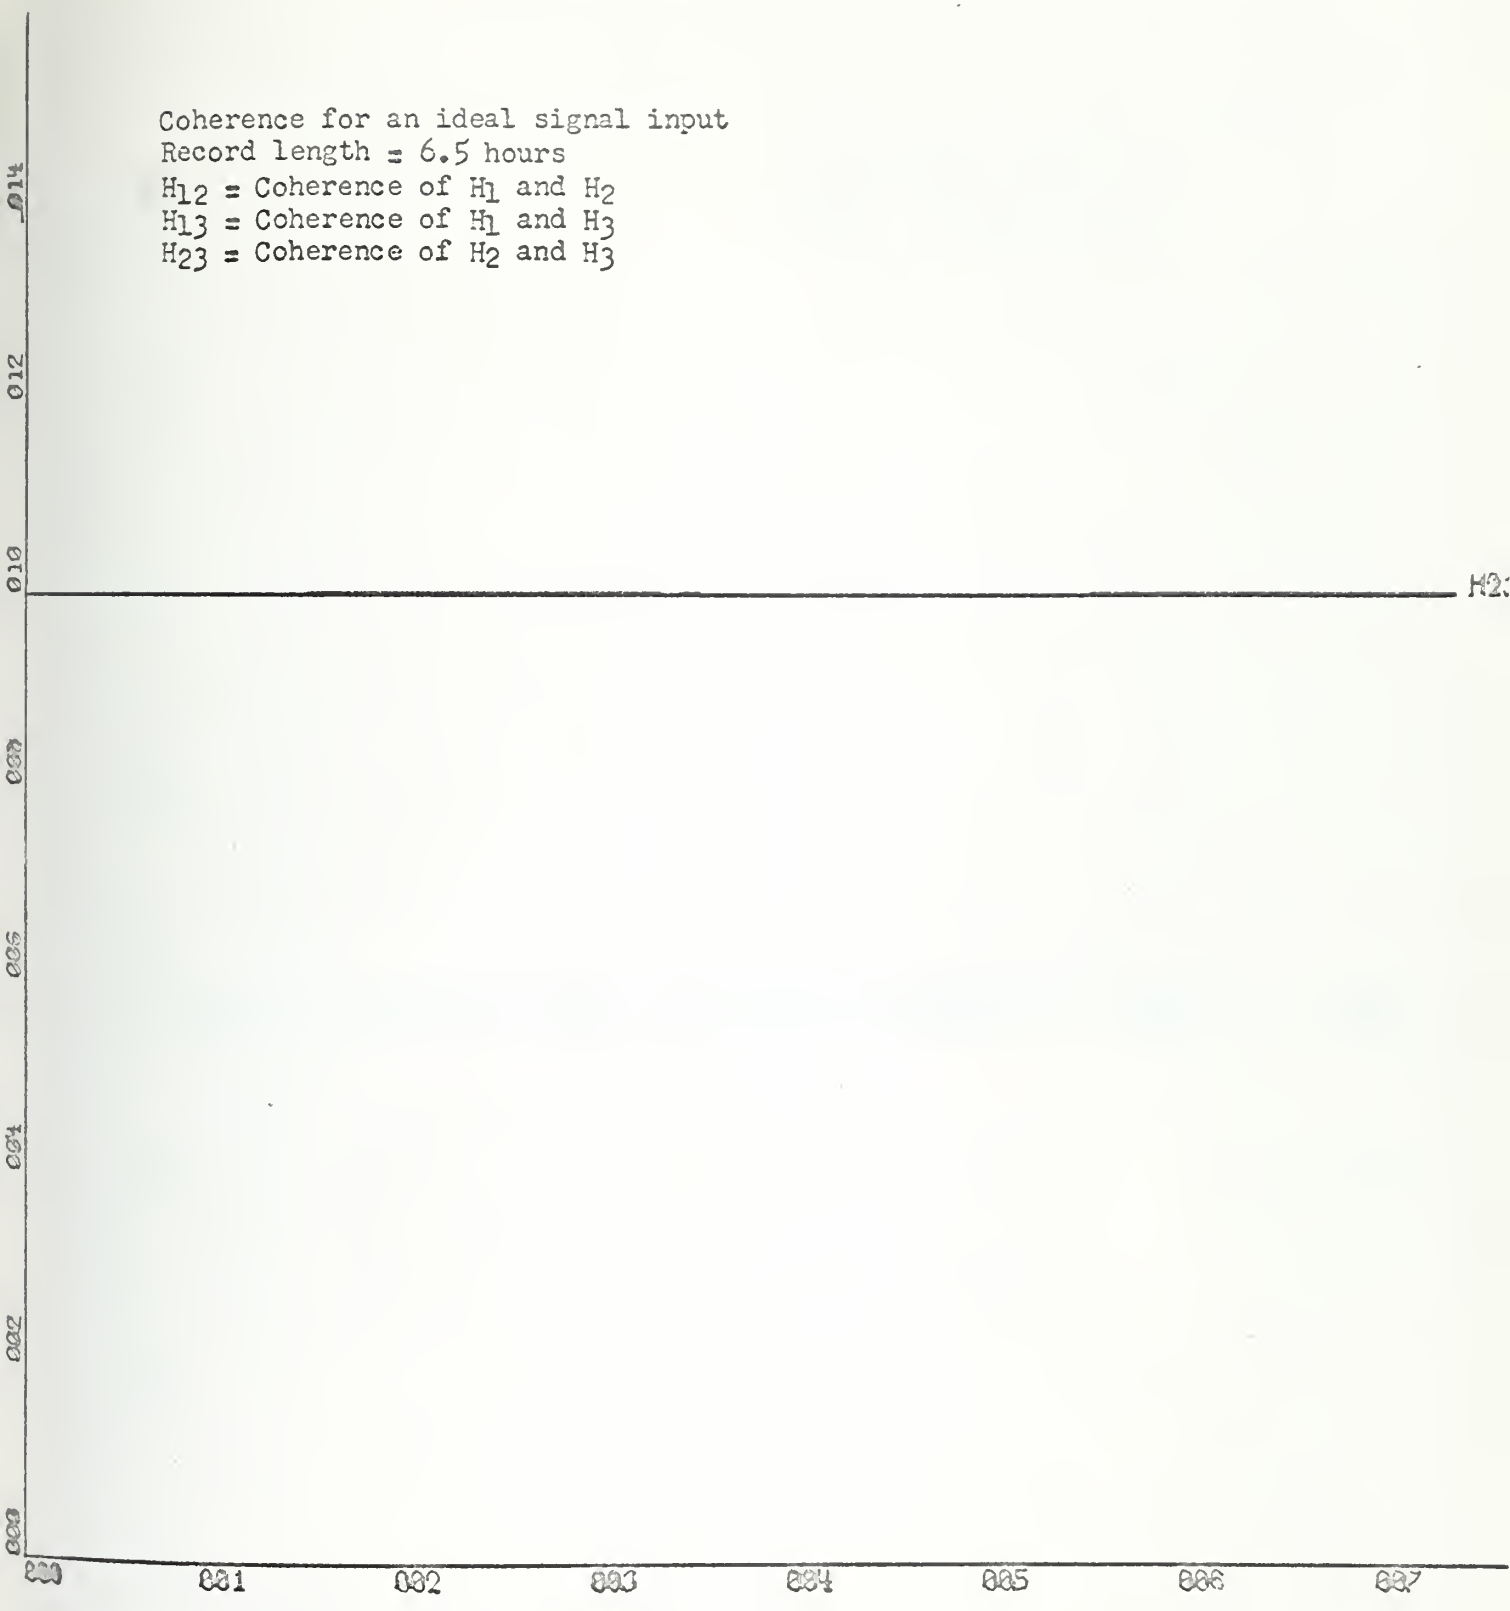

Figure 20

X-SCALE = 1.00E+01 UNITS/INCH
Y-SCALE = 2.00E-01 UNITS/INCH
ANDERSON BOX 263
COHERENCE FUNCTION Y IN COH X IN LAGS

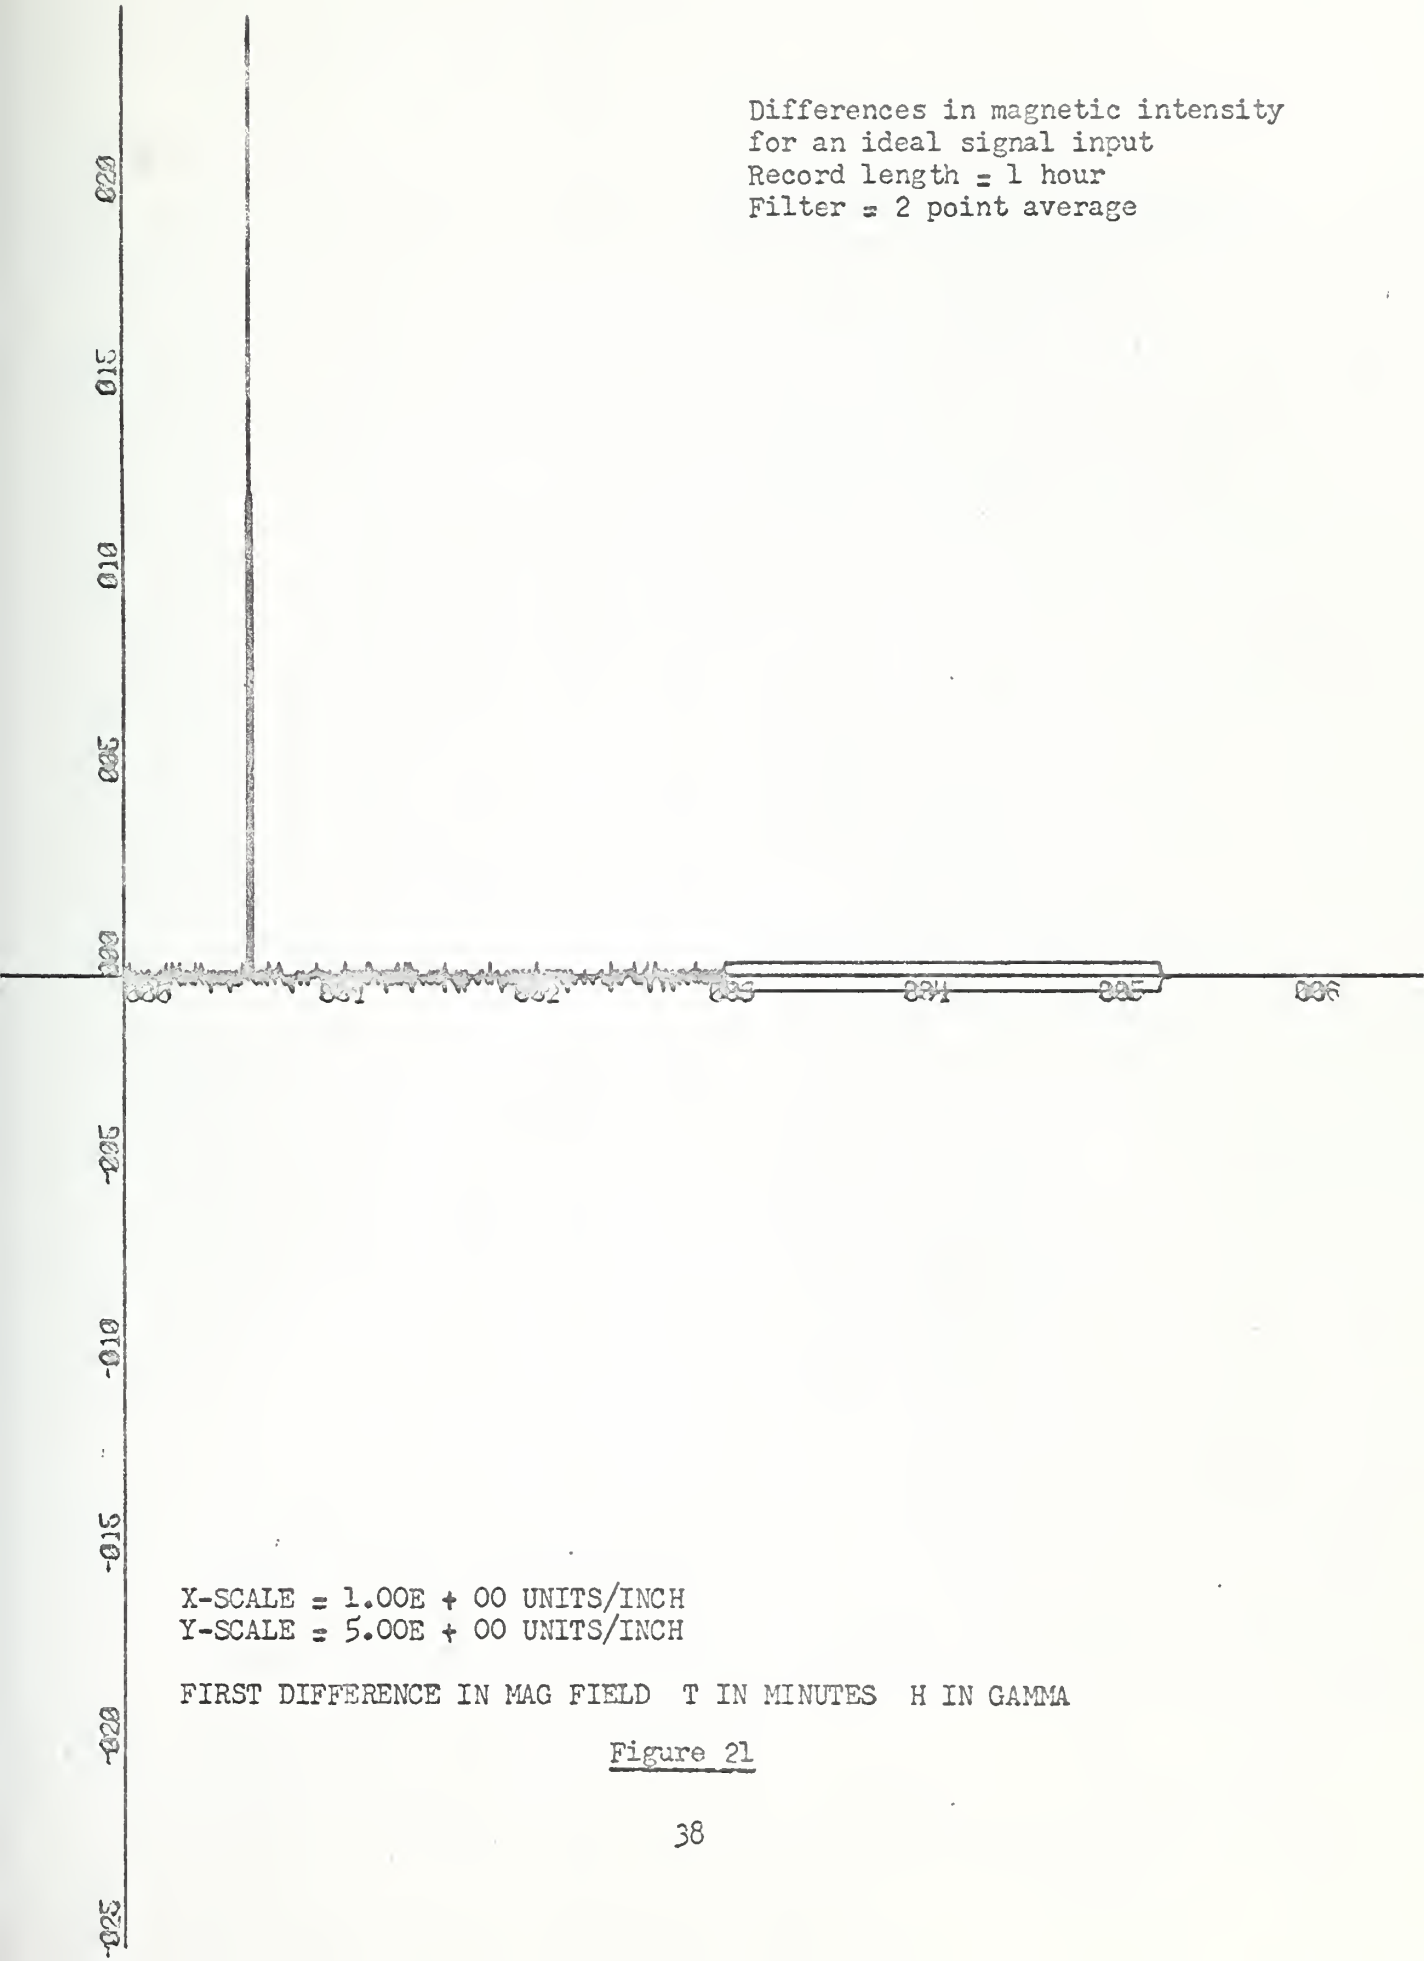

X-SCALE = 1.00E + 00 UNITS/INCH
Y-SCALE = 5.00E + 00 UNITS/INCH

FIRST DIFFERENCE IN MAG FIELD T IN MINUTES H IN GAMMA

Figure 21

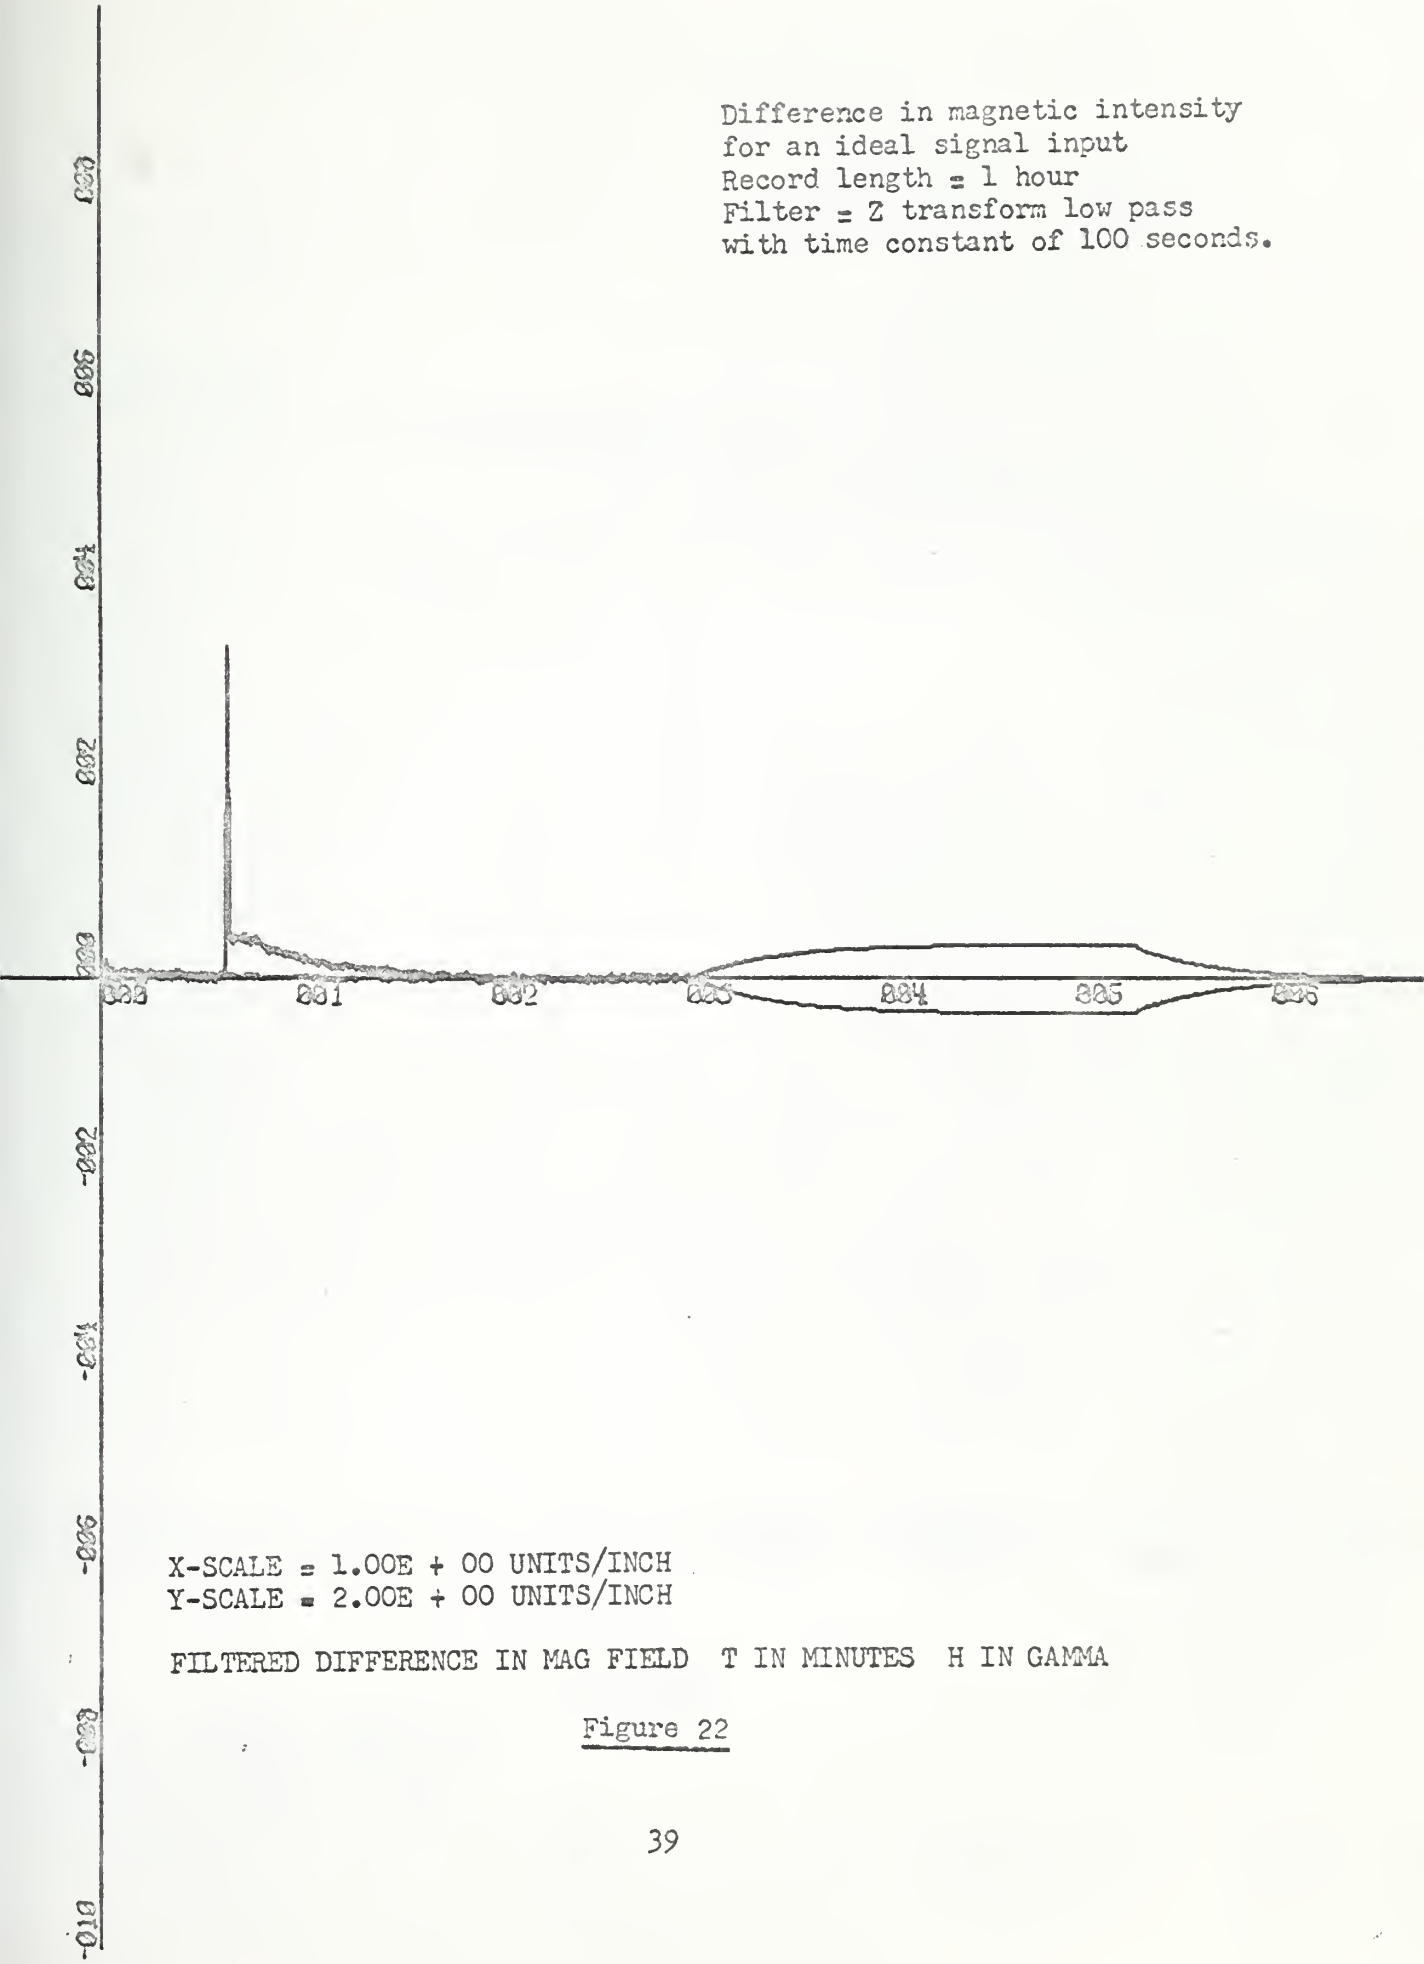
Difference in magnetic intensity
for an ideal signal input
Record length = 1 hour
Filter = Z transform low pass
with time constant of 100 seconds.
.003
.001
-.001
-.003
-.005
-.007
-.009
-.011
000
001
002
003
004
005
006
X-SCALE = 1.00E + 00 UNITS/INCH
Y-SCALE = 2.00E + 00 UNITS/INCH
FILTERED DIFFERENCE IN MAG FIELD T IN MINUTES H IN GAMMA

Figure 22

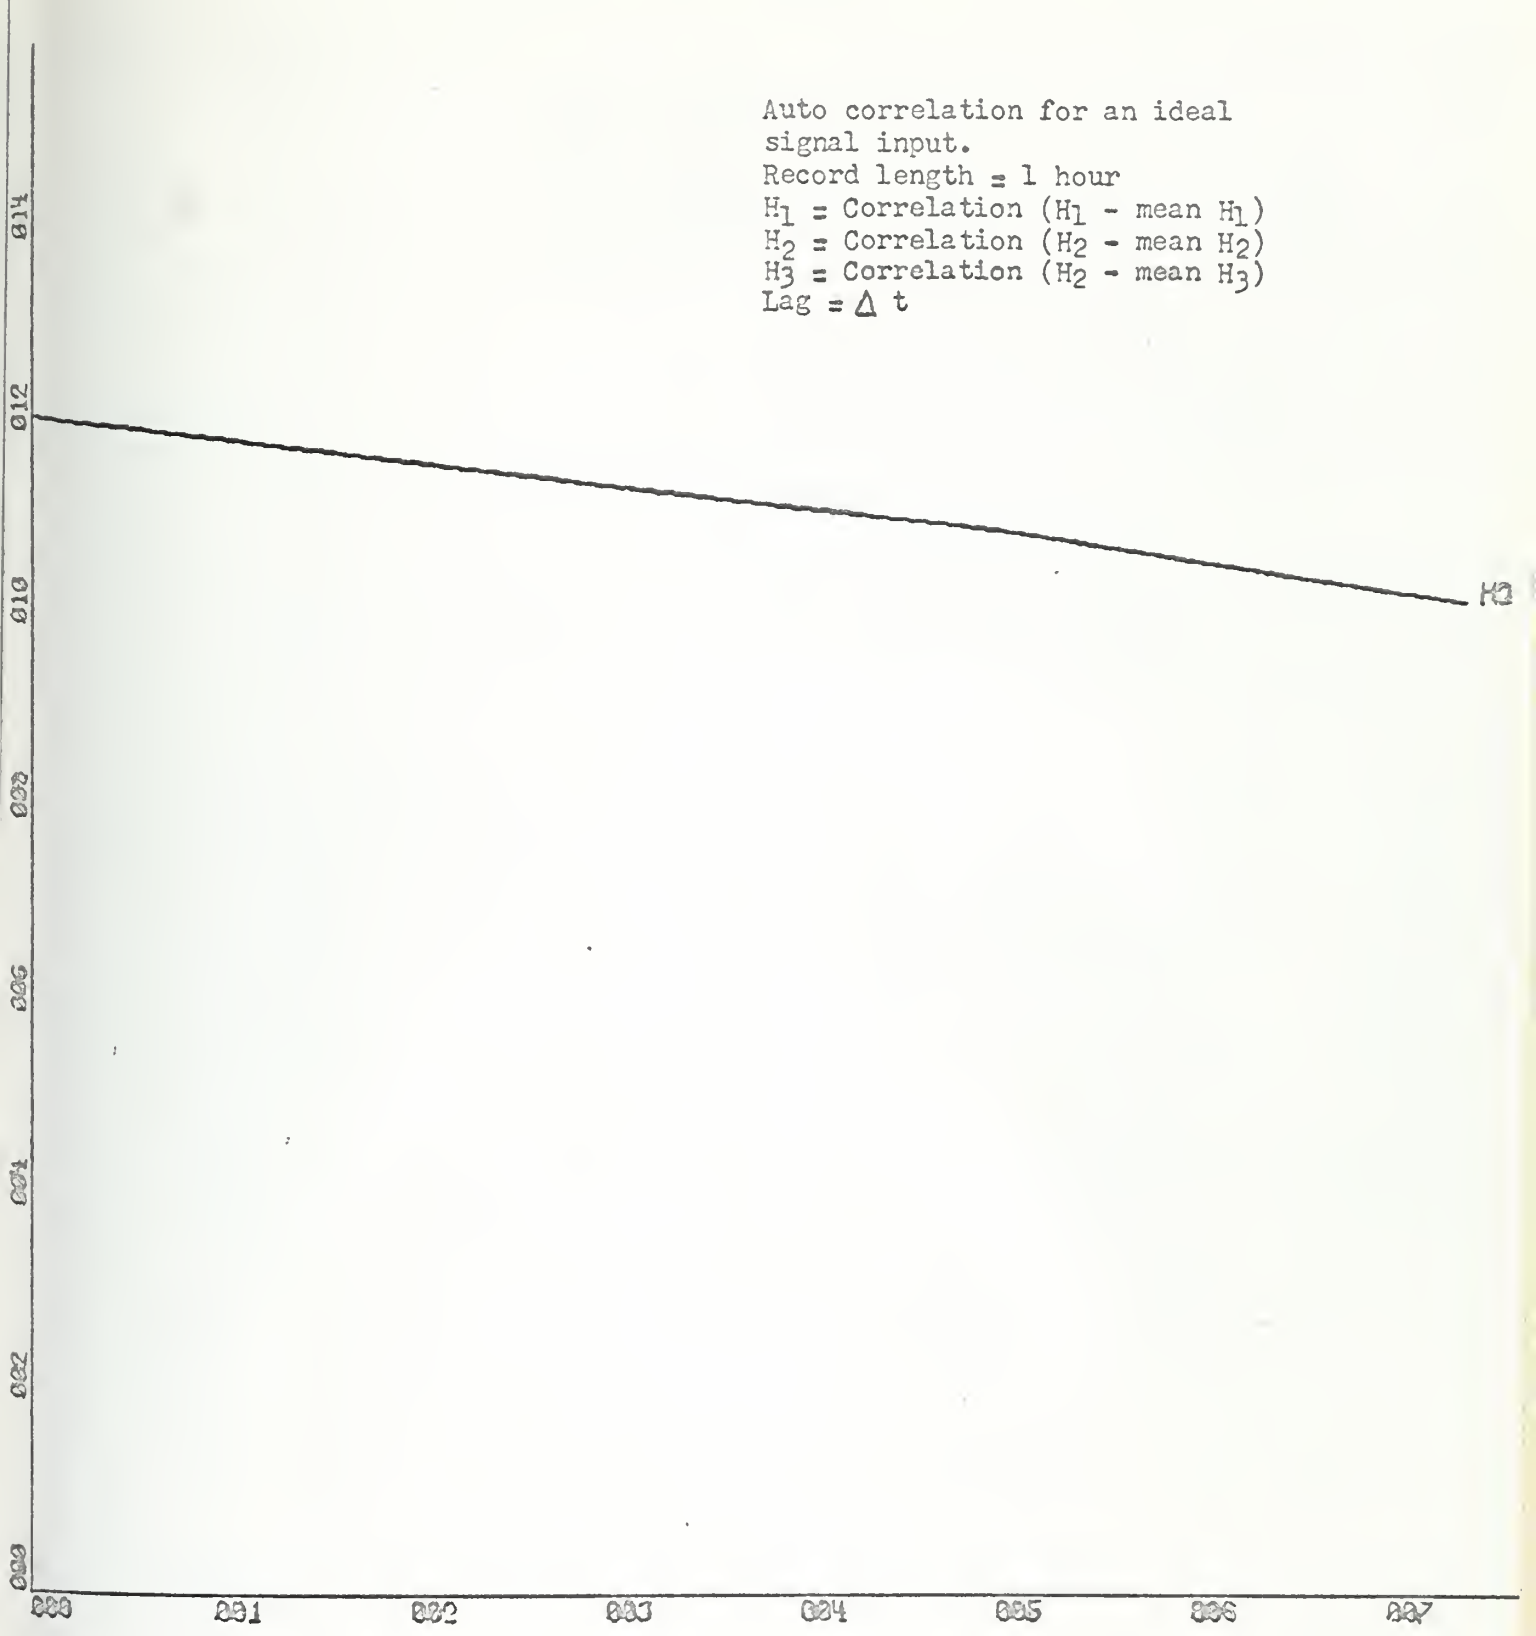

Figure 23

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 2.00E+03 UNITS/INCH.

ANDERSON BOX 263
AUTOCORRELATION FUNCTION Y IN PRODUCTS X IN LAGS

Cross correlation for an ideal signal input.
Record length = 1 hour
H_{12} = Correlation (H_1 - mean H_1 and H_2 - mean H_2)
H_{13} = Correlation (H_1 - mean H_1 and H_3 - mean H_3)
H_{23} = Correlation (H_2 - mean H_2 and H_3 - mean H_3)
Lag = Δ t

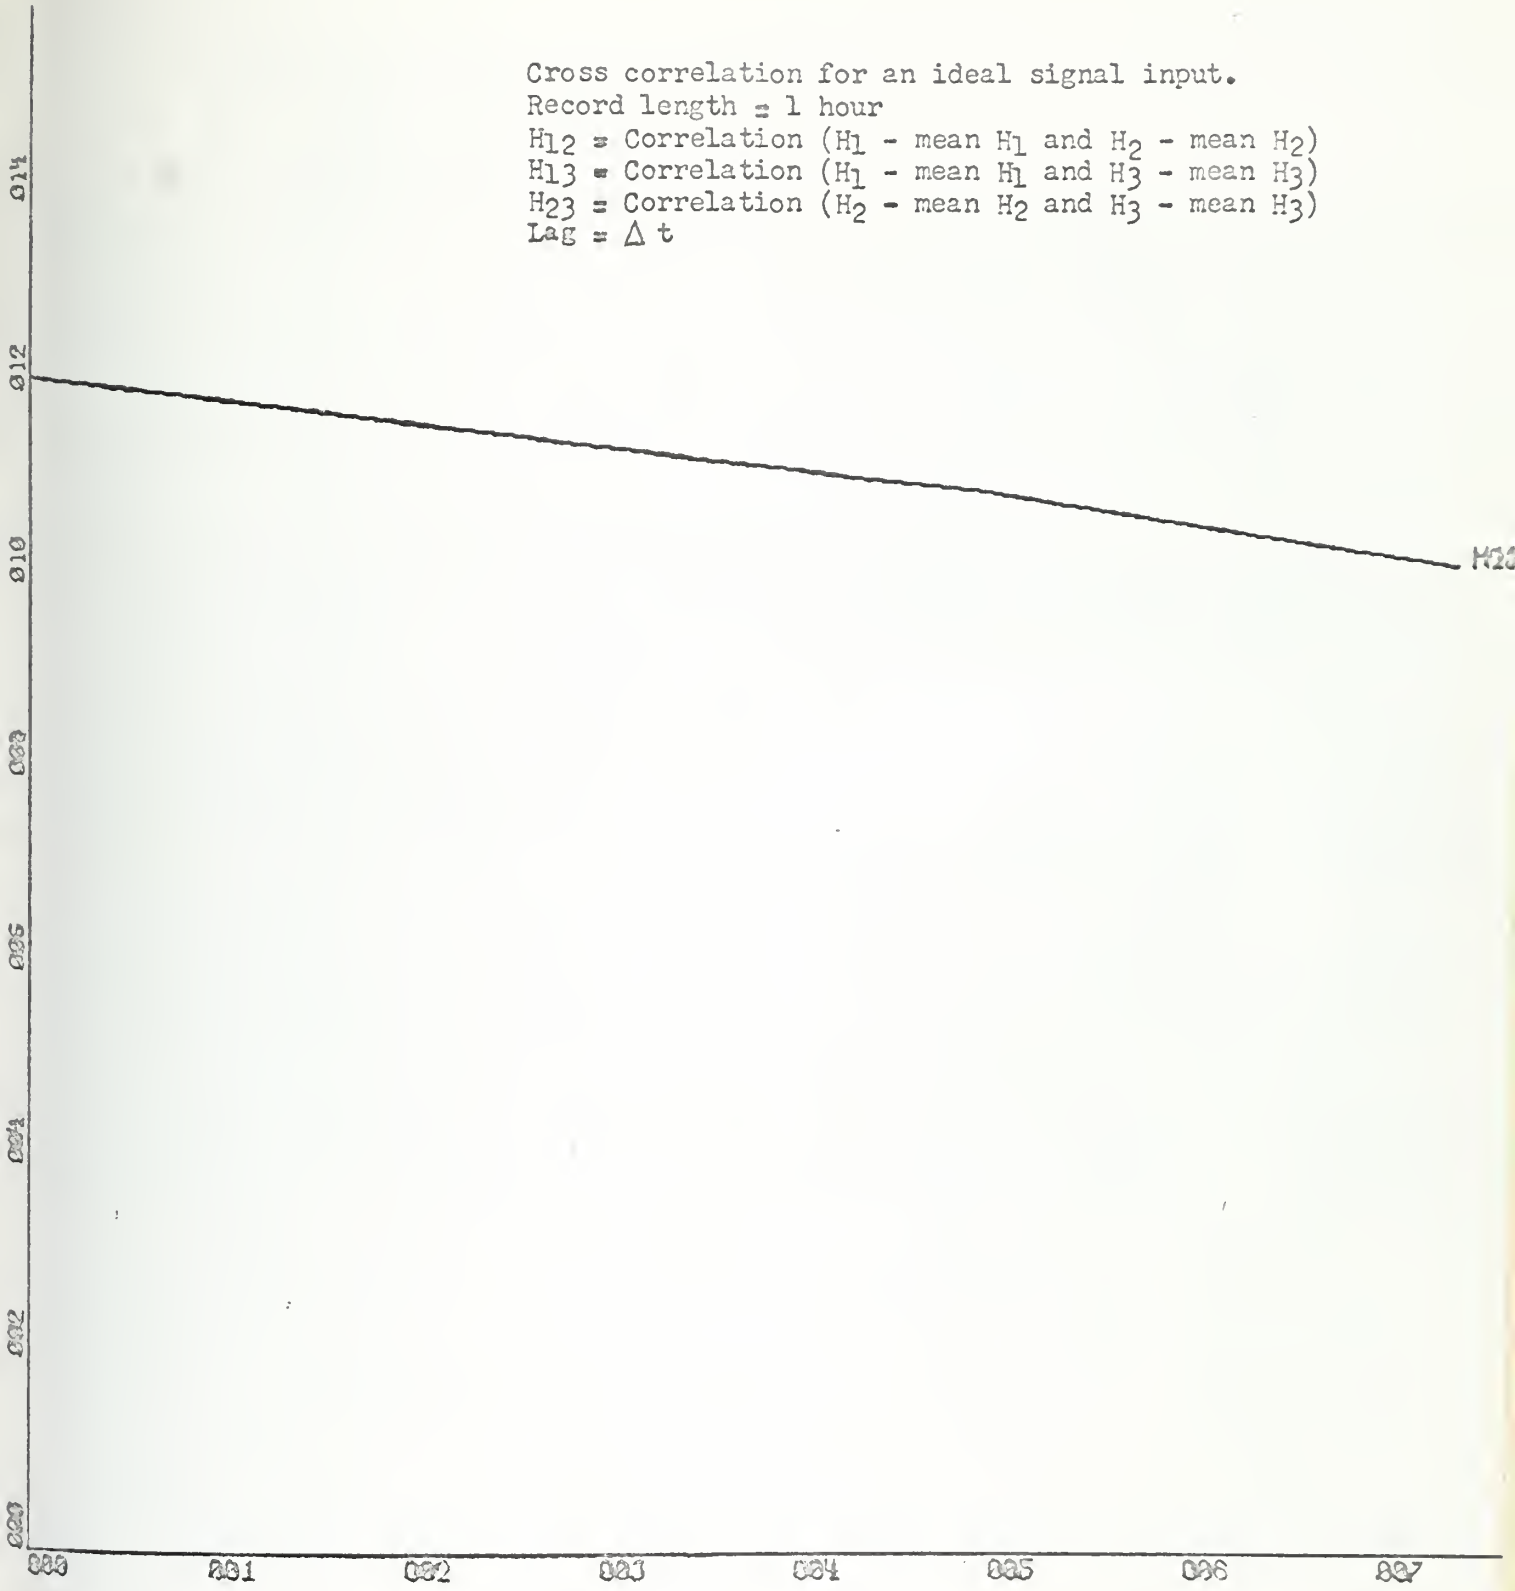

Figure 24

X-SCALE = 1.00E+01 UNITS/INCH
Y-SCALE = 2.00E+03 UNITS/INCH

ANDERSON BOX 263
CROSCORRELATION FUNCTION Y IN PRODUCTS X IN LAGS

Coherence for an ideal signal input
Record length = 1 hour
H_{12} = Coherence of H_1 and H_2
H_{13} = Coherence of H_1 and H_3
H_{23} = Coherence of H_2 and H_3

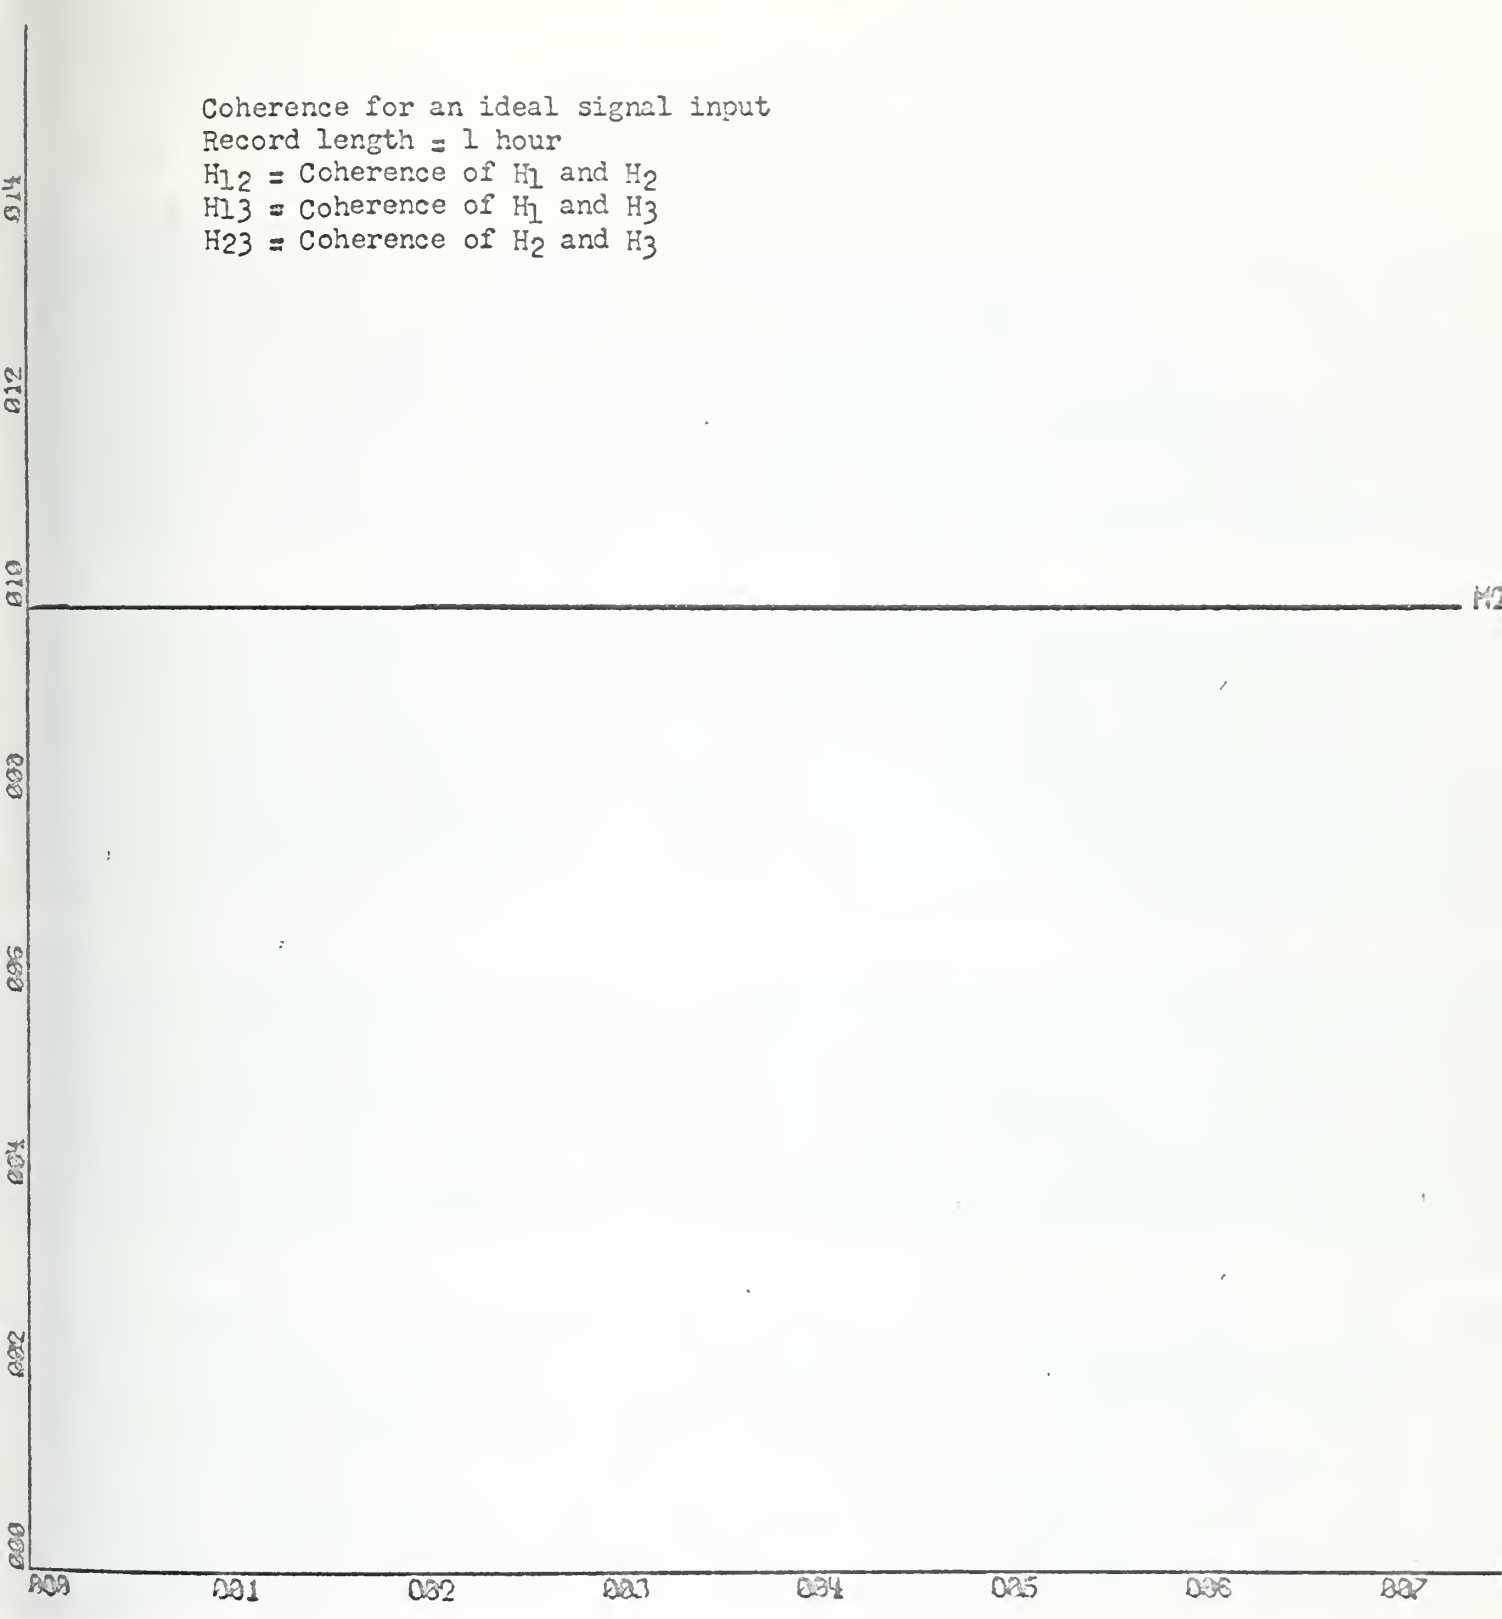

Figure 25

X-SCALE = 1.00E+01 UNITS/INCH
Y-SCALE = 2.00E-01 UNITS/INCH
ANDERSON BOX 263
COHERENCE FUNCTION Y IN COH X IN LAGS

TYPICAL ANALOG PLOT OF
MAGNETIC INTENSITY VS. TIME
FILTER = RC WITH TIME CONSTANT OF 6 SECONDS

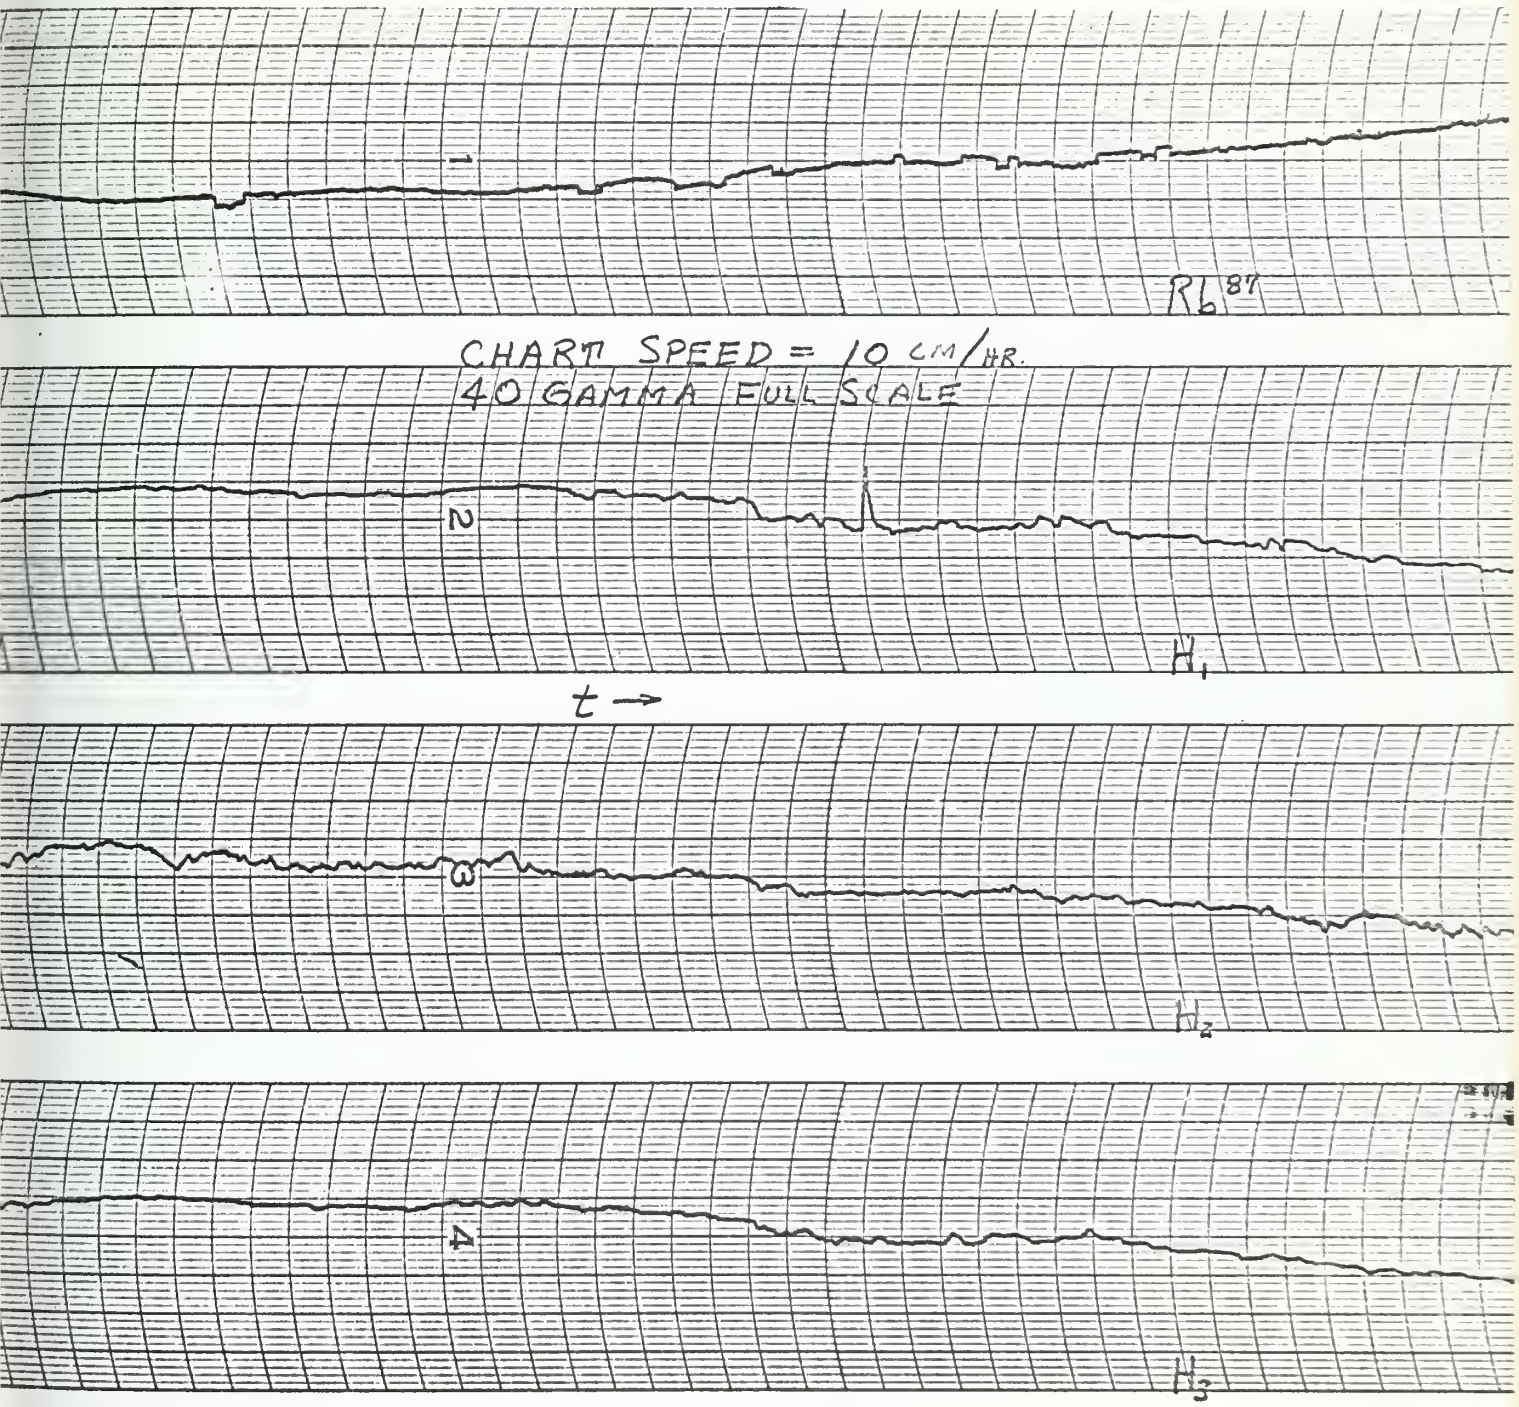

FIGURE 26

TYPICAL ANALOG PLOT OF
THE DIFFERENCES VS. TIME
FILTER = RC WITH TIME CONSTANT OF 6 SECONDS

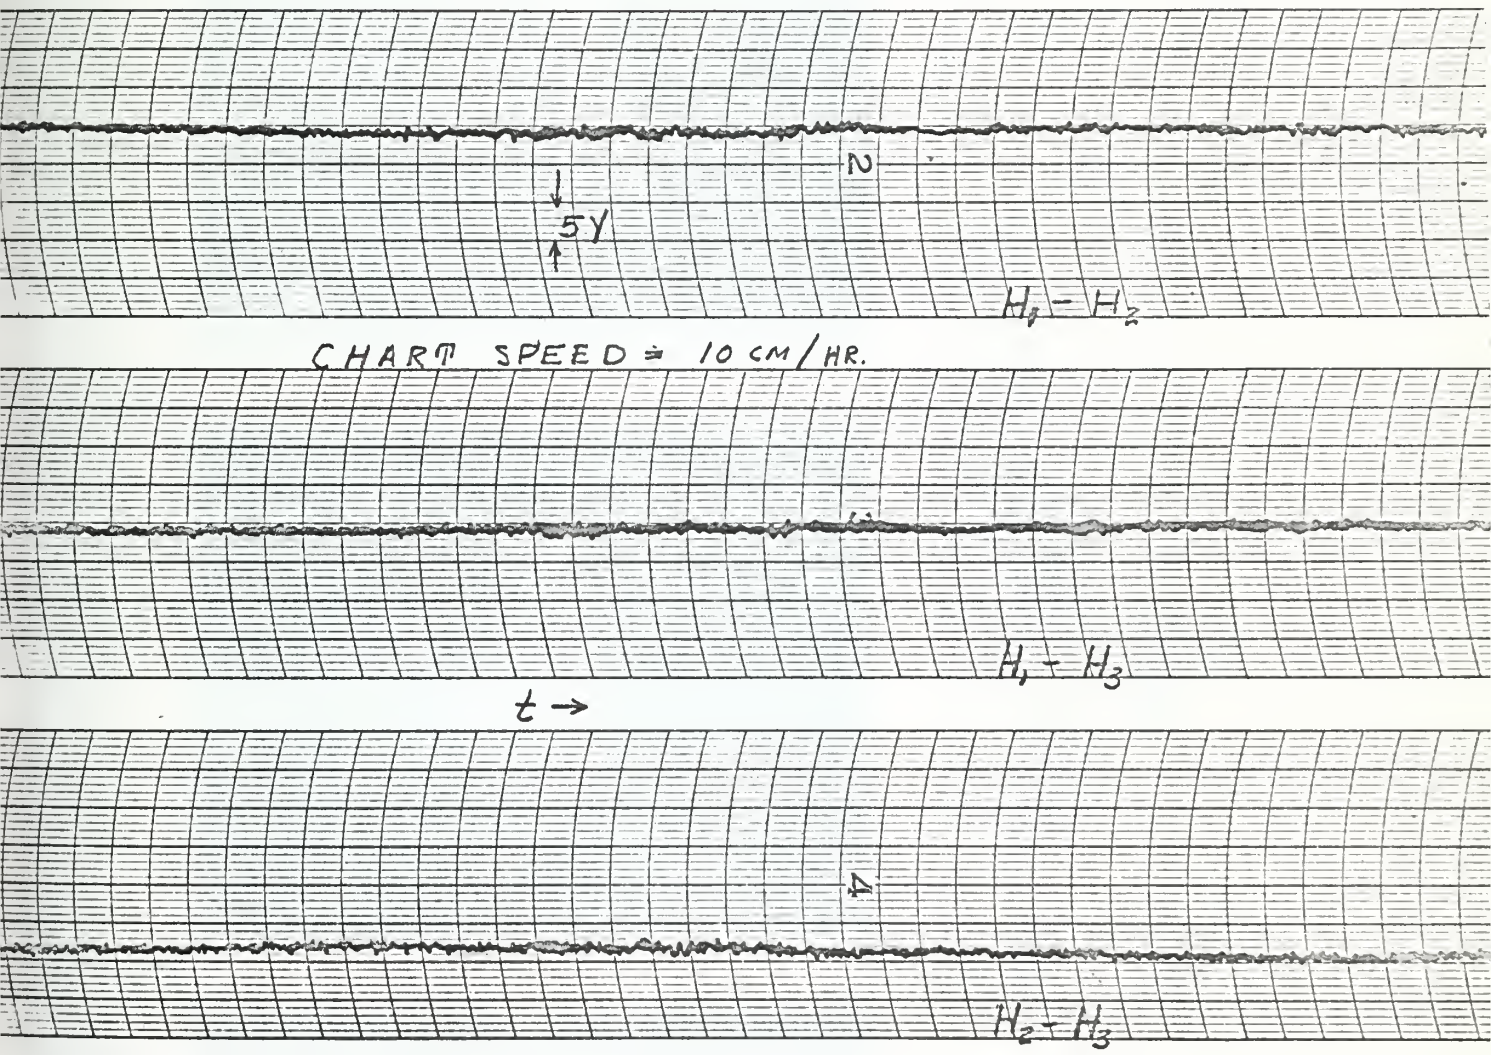

DIVISION OF CLEVITE CORPORATION CLEVELAND, OHIO PRINTED IN U.S.A.

FIGURE 27

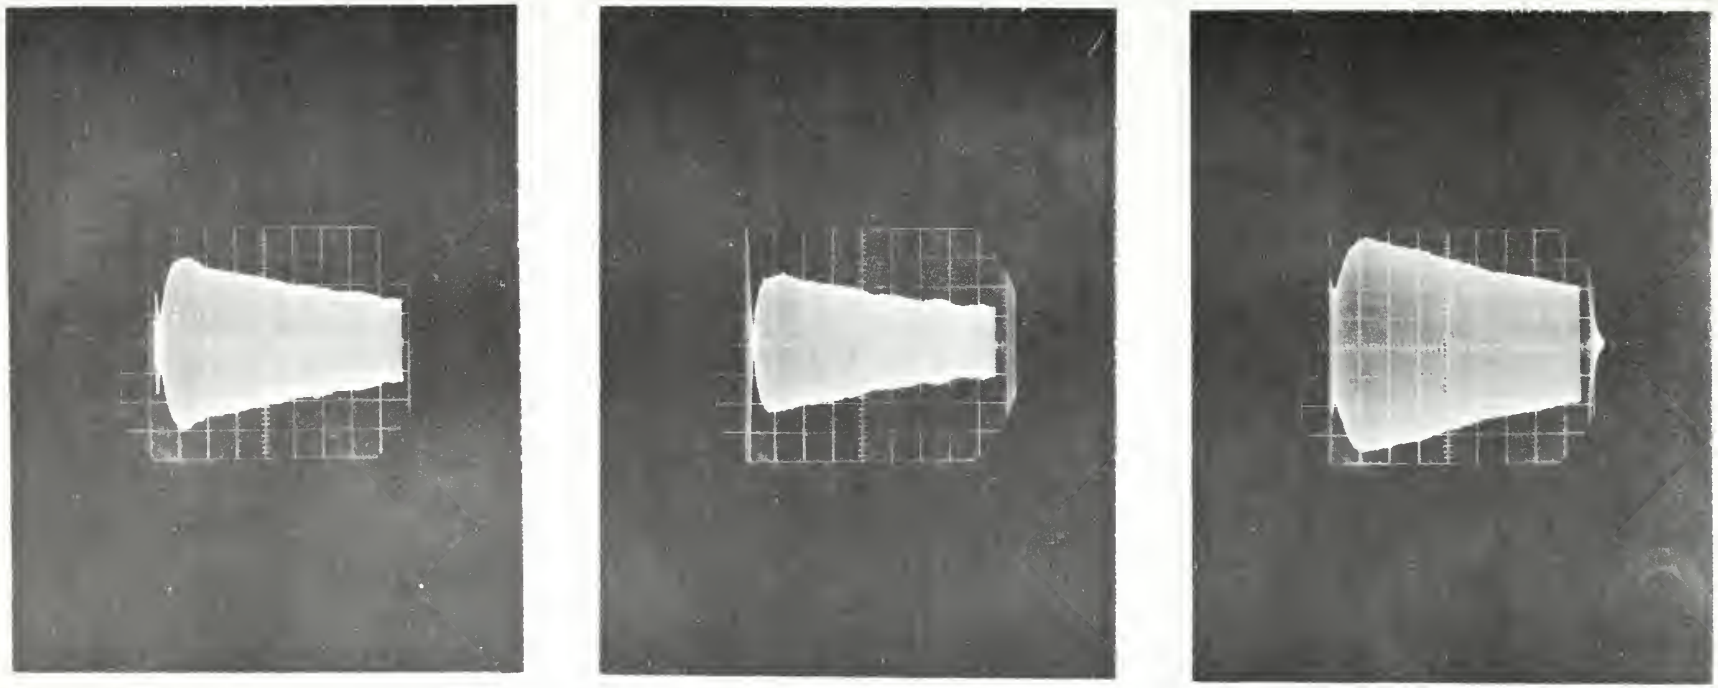

H_1 H_2 H_3

PRECESSION SIGNALS FROM THE THREE SENSORS AFTER PREAMPLIFICATION
HORIZONTAL = 0.1 SEC/CM
VERTICAL = 0.1 VOLT/CM

FIGURE 28

4.2 Magnetic field measurements

Only representative results of the magnetic field measurements are presented, since the measurements are not complete at this time. Samples of plots made with the clock at 100 kc/s are included to illustrate the effect of the clock frequency on the results. For the associated density function of the differences, the allowable values are $0 \pm 1.1, \pm 2.2, \pm \cdots$ in gamma, with the clock at 100 kc/s. The expanded difference vs. time shows clearly the $\pm$ last bit limitation. Comparing the density functions with the plots for the clock at 300 kc, shows that most of the noise associated with the measurement is due to the last bit and can be reduced by increasing the clock frequency. The perturbation experiments were conducted with the clock at 300 kc/s. The results of the perturbation experiments show clearly the effect of the digital filtering, and the importance of time constant consideration for target detection. The oscillator is to be run 1 mc/s for further experiments. Also, many of the errors that appear in the data were the direct result of the instrumentation tape. New tape has been purchased and should eliminate most of these errors, in future records.

As pointed out previously, the basic assumptions regarding correlation are not valid, when the noise is not stationary; however, since correlation detectors can be instrumented and may prove useful in the detection problem. Some of the correlation function plots are included to illustrate the effect of local perturbations on the functions.

5. Conclusions

For target detection, where the signals under consideration are in the $\frac{1}{2}$ gamma, or less range, it will be difficult to detect the target without resorting to sophisticated signal processing. In this range of signals, consideration should be given to other instruments; such as the Rubidium optically pumped magnetometer, whose theoretical sensitivity is 0.001 gamma, especially where the detector is stationary, and orientation is not a problem. It can be demonstrated that when using the same measurement technique as for the proton magnetometer, the instrument and processing noise will be an order of magnitude less than the theoretical limits imposed by the sensitivity of the instrument.

For signals in the $\frac{1}{2}$ to $1\frac{1}{2}$ gamma range, detection could be accomplished with analog type correlation detectors. These could be implemented with operational amplifiers.

Signals above this range could be detected with the simple differencing technique, and the associated R.C. filters.

Increasing the clock frequency and averaging the period over more than 1024 cycles would reduce the measurement noise to a smaller part of the total noise. The target signals could then be reduced by a factor of three, with no change in the instrumentation.

Full utilization of the inherently narrow line width of proton magnetometer cannot be achieved using the standard measuring technique. Other techniques have been suggested by Professor Carl I. Menneken; such as utilizing a rapid coherent polarization in a phase-lock loop arrangement. Further development work needs to be done to explore these possibilities.

BIBLIOGRAPHY

1. A. Abragam, The Principles of Nuclear Magnetism, University Press, 1961.

2. Herman Neidhart, Digital Methods of Measuring Frequencies from DC to 12,000 Mc, Beckman Instruments Publication.

3. Alexander Hoffman, Geophysical Interpretations of Power Spectral Analysis of Low Frequency Fluctuations in the Magnetotelluric Field, University of Texas, Ph.D. Thesis, 1962.

4. A. W. Green, Jr., B. H. List and J.F.P. Zengel, Theory, Measurement and Applications of Very-Low-Frequency Magnetotelluric Variations, Proceedings of the I. R. E., Vol. 50, No. 11, pp. 2347 - 2363, Nov., 1962.

5. J. A. Jacobs and K. Sinno, Occurrence Frequency of Geomagnetic Micropulsations, Journal of Geophysical Research, Vol. 65, No. 1, pp. 107 - 113, Jan., 1960.

6. Ragazzini and Franklin, Sampled Data Control Systems, McGraw Hill, 1958.

APPENDICES

APPENDIX I

RESULTS OF MAGNETIC FIELD AND PERTURBATION EXPERIMENTS

APPENDIX I

Typical earth's magnetic field vs. time for clock at 100 kc/s and no local perturbations.
Record length = 6.5 hours
$H_1 = H_1$ - mean H_1
$H_2 = H_2$ - mean H_1
$H_3 = H_3$ - mean H_1
Filter = 18 point average
Mean H_1 = 0.50917 E + 05

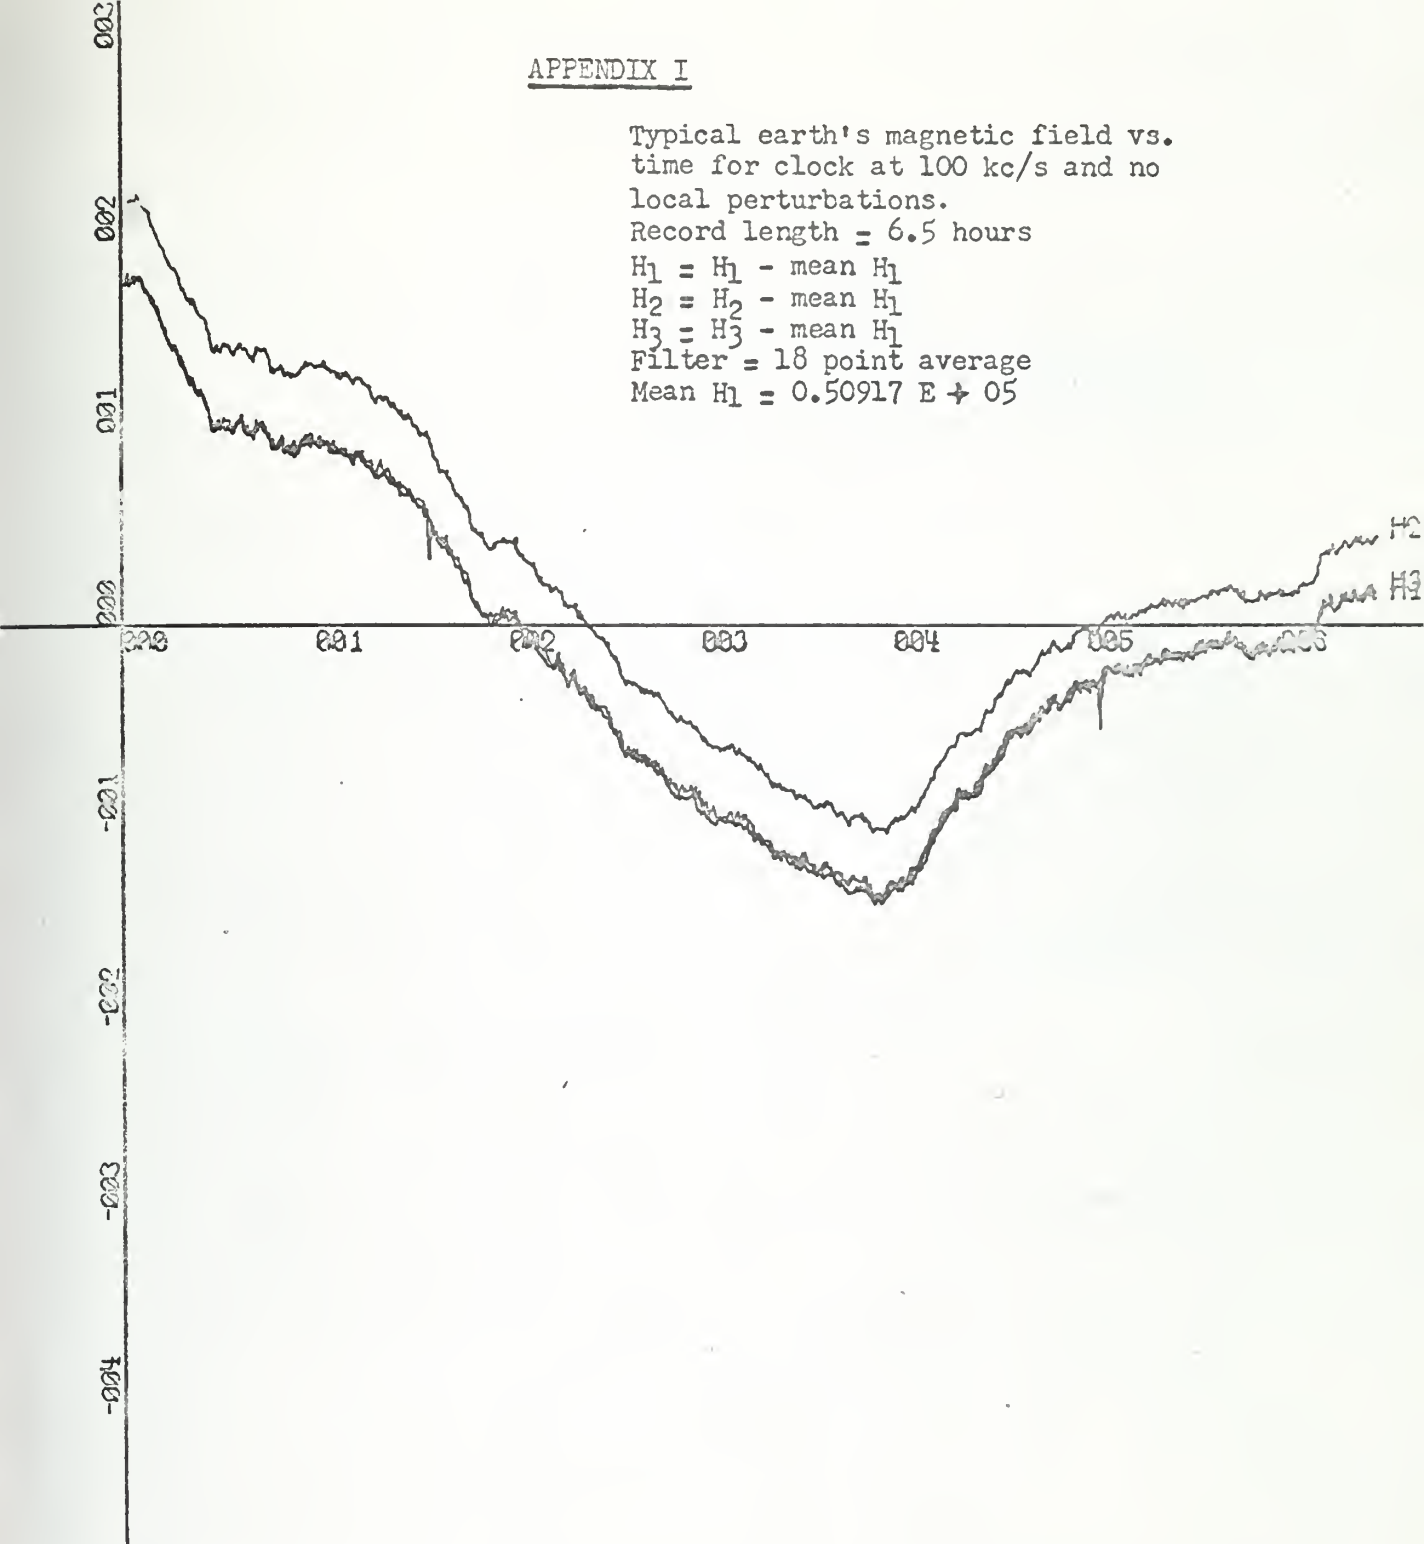

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 1.00E+01 UNITS/INCH.

IDERSON BCX 263
ARTHS MAGNETIC FIELD VS TIME T IN HRS H GAMM

APPENDIX I

Typical earth's magnetic field vs. time for clock at 100 kc/s and no local perturbations.
Record length = 6.5 hours
$H_1 = H_1$ - mean H_1
$H_2 = H_2$ - mean H_1
$H_3 = H_3$ - mean H_1
Filter = Z transform low pass with time constant = 20 minutes
Mean H_1 = 0.50917 E + 05

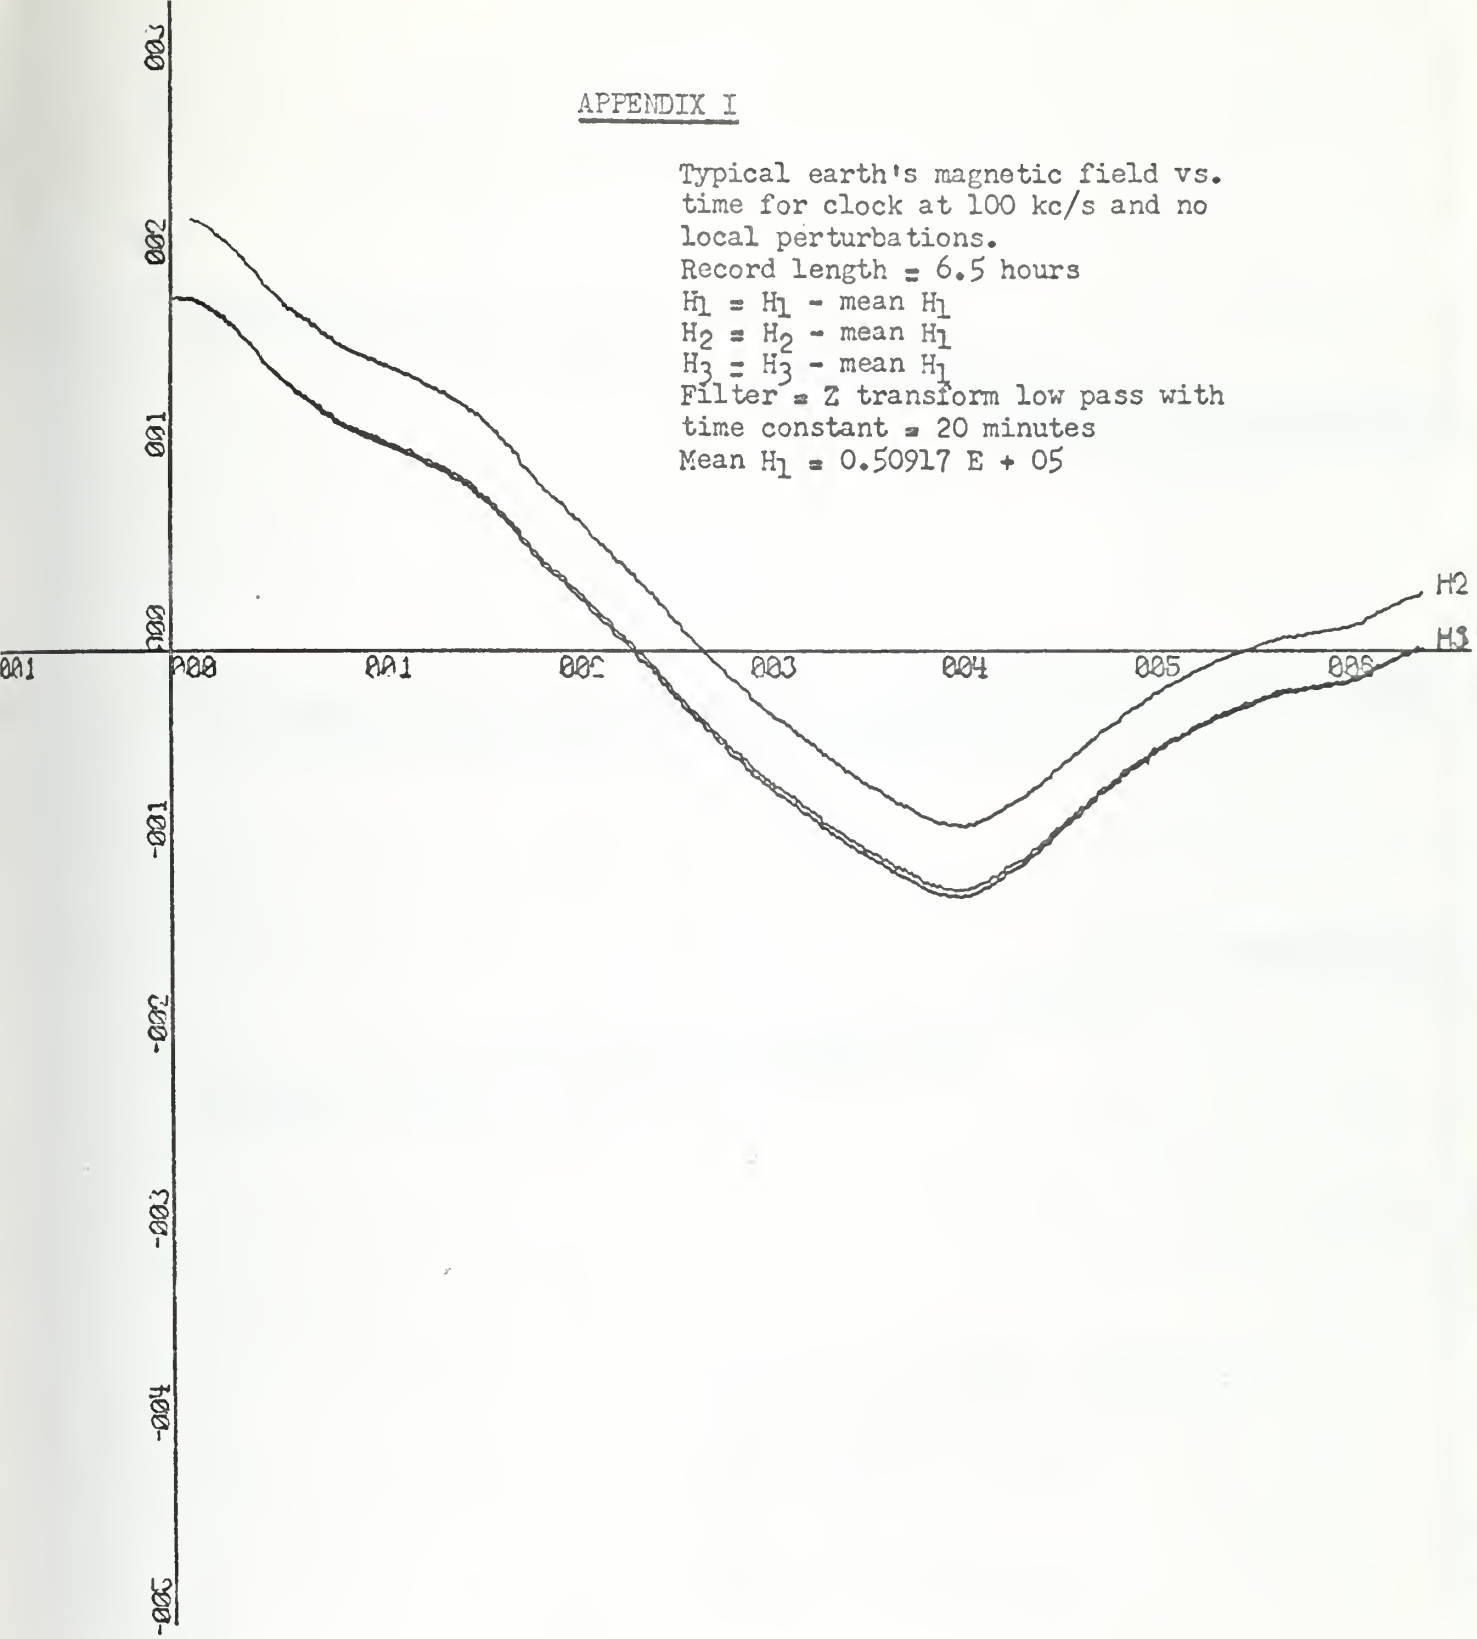

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 1.00E+01 UNITS/INCH.
ANDERSON FILTER
EARTHS MAGNETIC FIELD VS TIME T IN HRS H GAMM

APPENDIX I

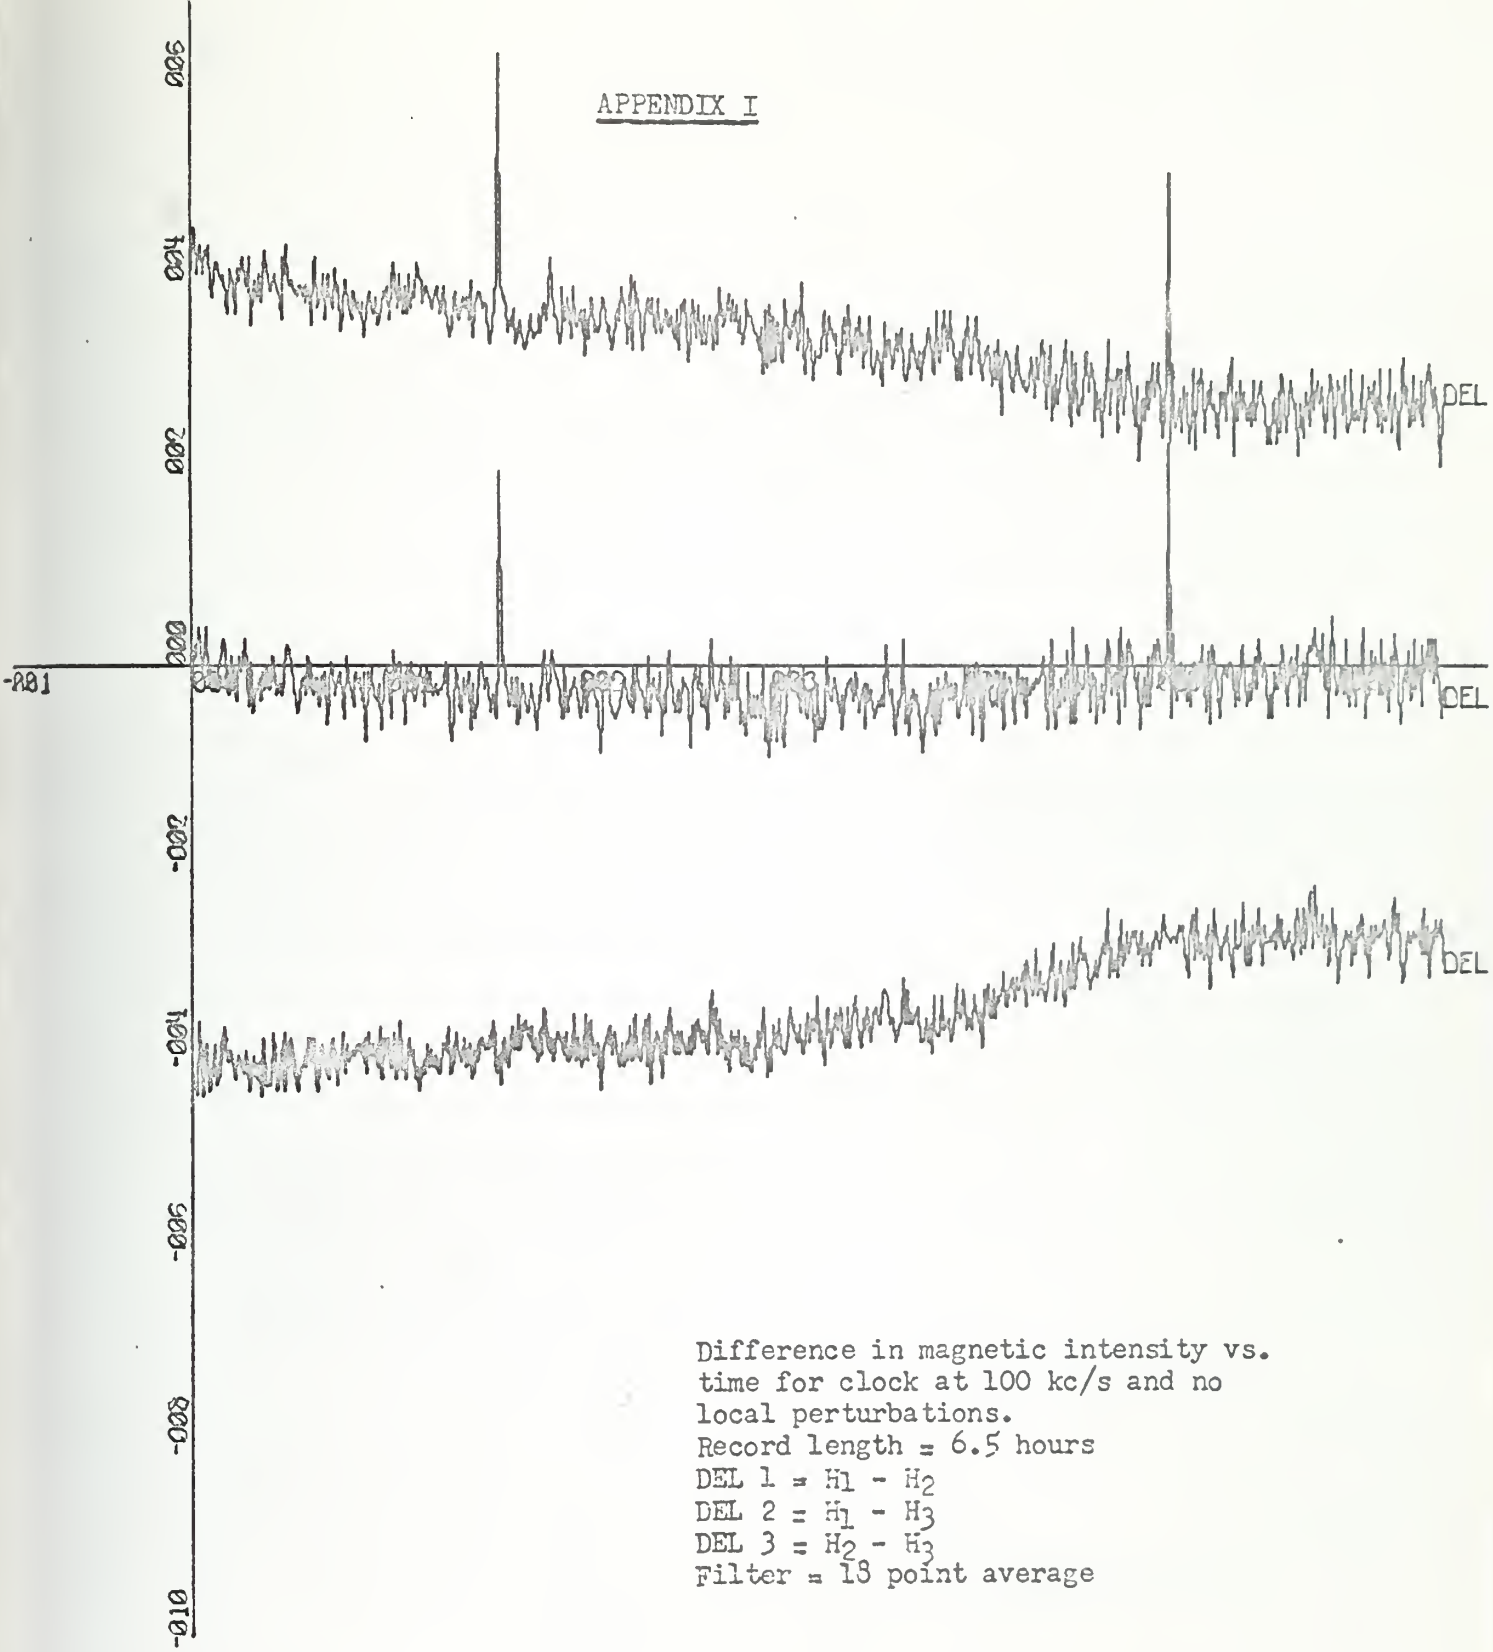

Difference in magnetic intensity vs. time for clock at 100 kc/s and no local perturbations.
Record length = 6.5 hours
DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$
Filter = 13 point average

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 2.00E+00 UNITS/INCH.

ANDERSON BOX 263
FIRST DIFFERENCE IN MAG FIELD T IN HRS H GAMMA

APPENDIX I

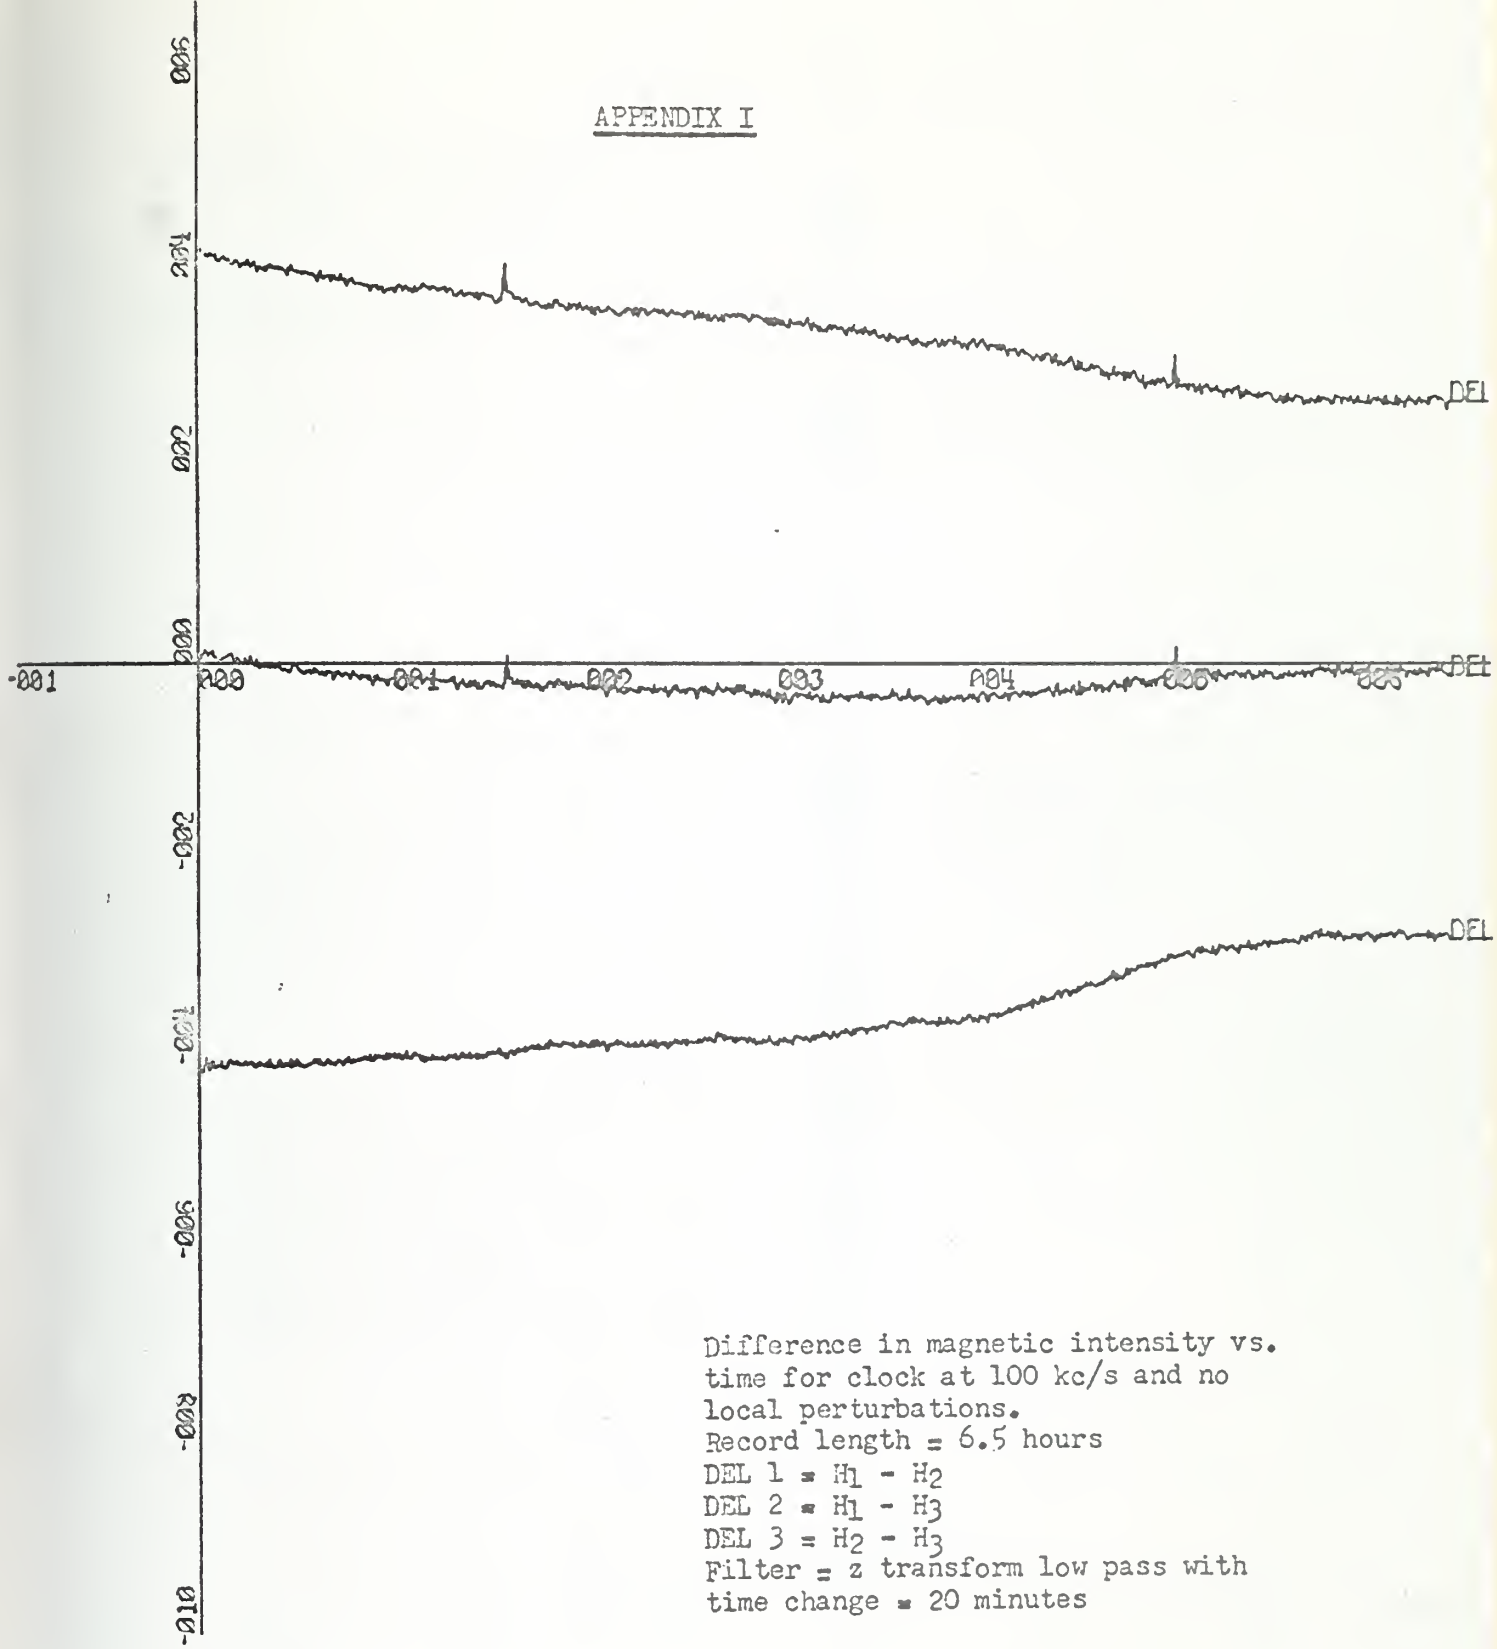

Difference in magnetic intensity vs. time for clock at 100 kc/s and no local perturbations.
Record length = 6.5 hours
DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$
Filter = z transform low pass with time change = 20 minutes

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 2.00E+00 UNITS/INCH.

ANDERSON FILTER
FILTEREDDIFFERENCE IN MAG FIELD T IN HRS H GAMMA

APPENDIX I

Normalized density function of the difference, D. No local perturbations
Record length = 6.5 hours
Clock = 100 kc/s
$(H_1 - H_2)$ - mean $(H_1 - H_2)$ = D
Mean = -3.21 gamma

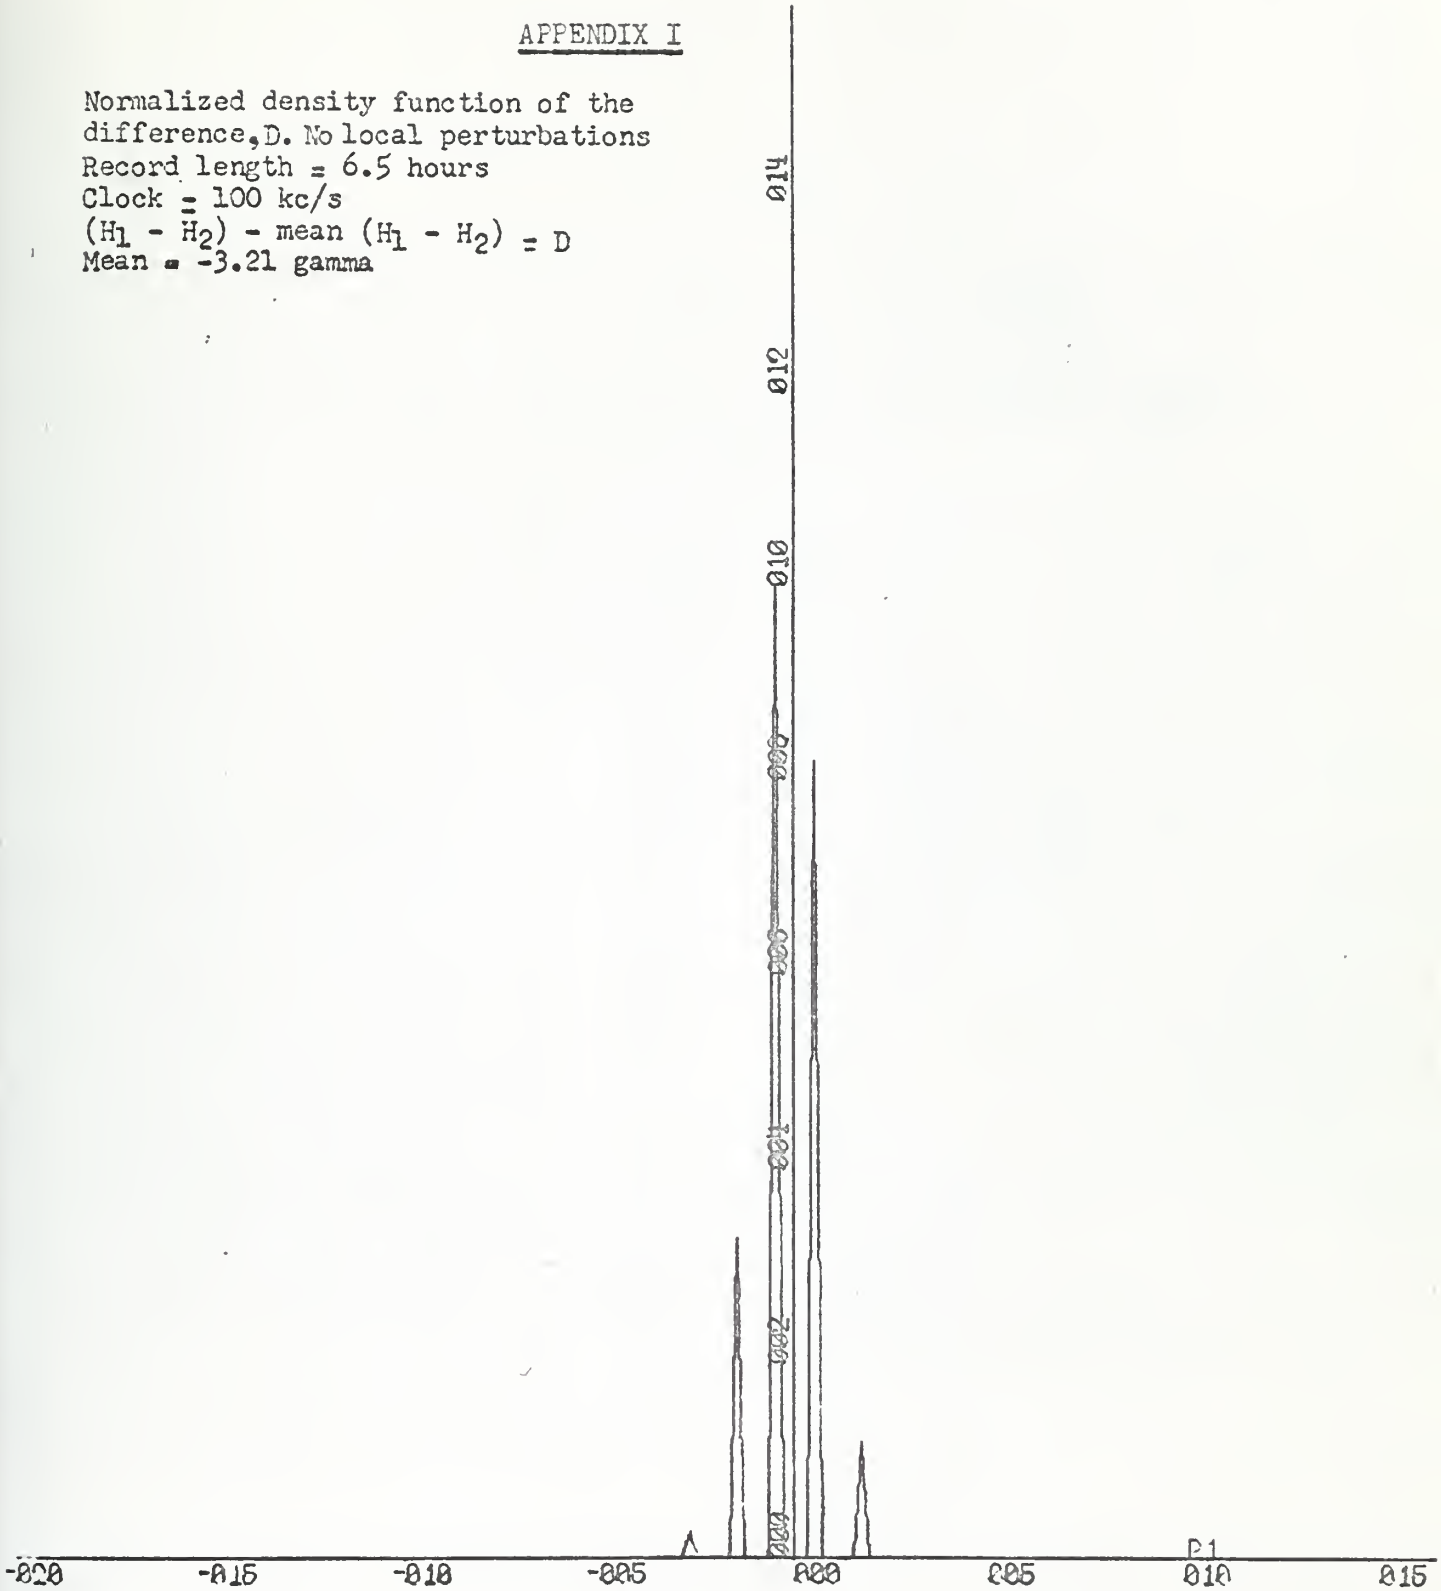

Y-SCALE = 5.00E+00 UNITS/INCH.
X-SCALE = 2.00E-01 UNITS/INCH.

ANDERSON BOX 263
DENSITY FUNCTION X IN GAMMA Y IN FREQ

APPENDIX I

Normalized density function of the difference, D. No local perturbations
Record length = 6.5 hours
Clock = 100 kc/s
$(H_2 - H_3)$ - mean $(H_2 - H_3)$ = D
Mean = -0.05 gamma

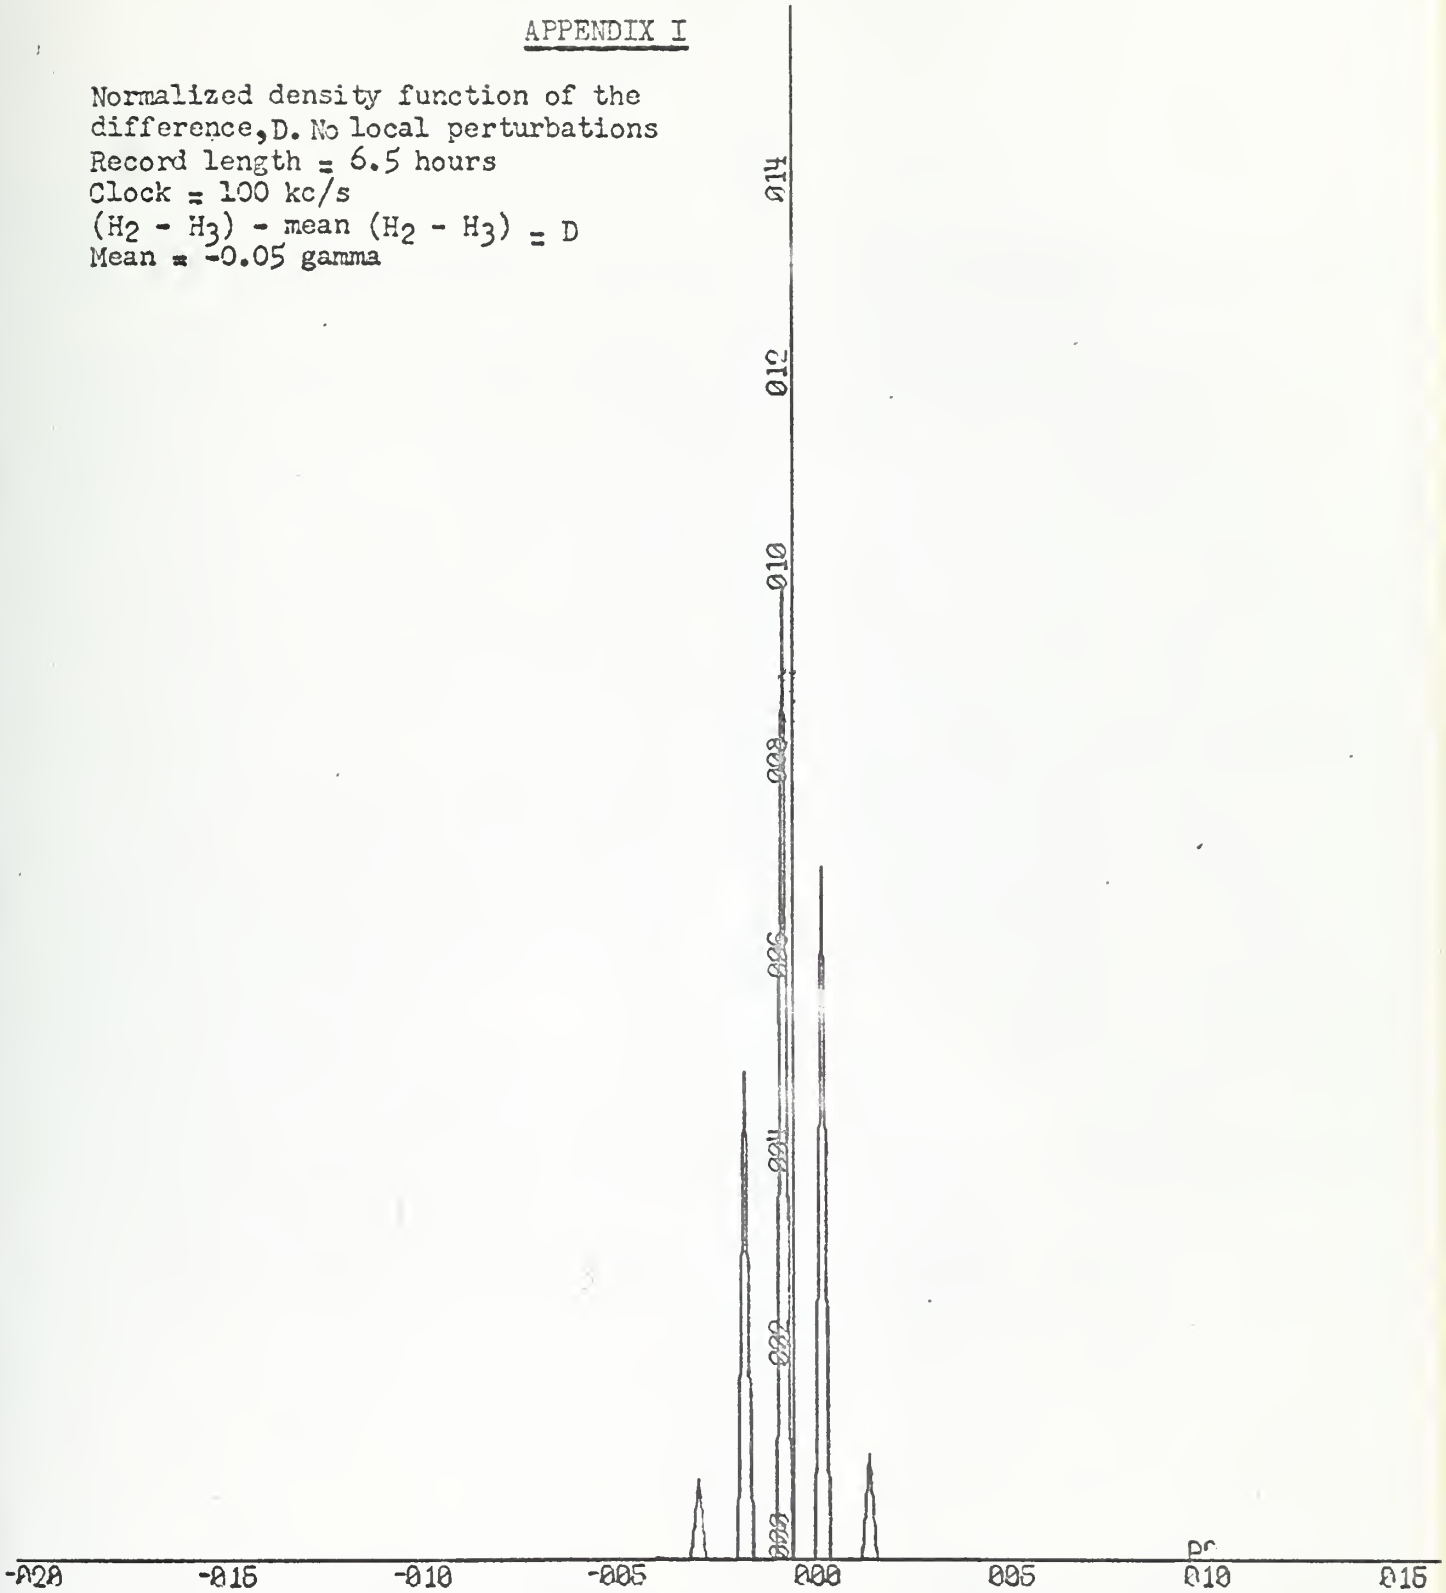

X-SCALE = 5.00E+00 UNITS/INCH.
Y-SCALE = 2.00E-01 UNITS/INCH.

ANDERSON BOX 263
DENSITY FUNCTION X IN GAMMA Y IN FREQ

APPENDIX I

Normalized density function of the difference, D. No local perturbations
Record length = 6.5 hours
Clock = 100 kc/s
$(H_1 - H_3)$ - mean $(H_1 - H_3)$ = D
Mean = 3.16 gamma

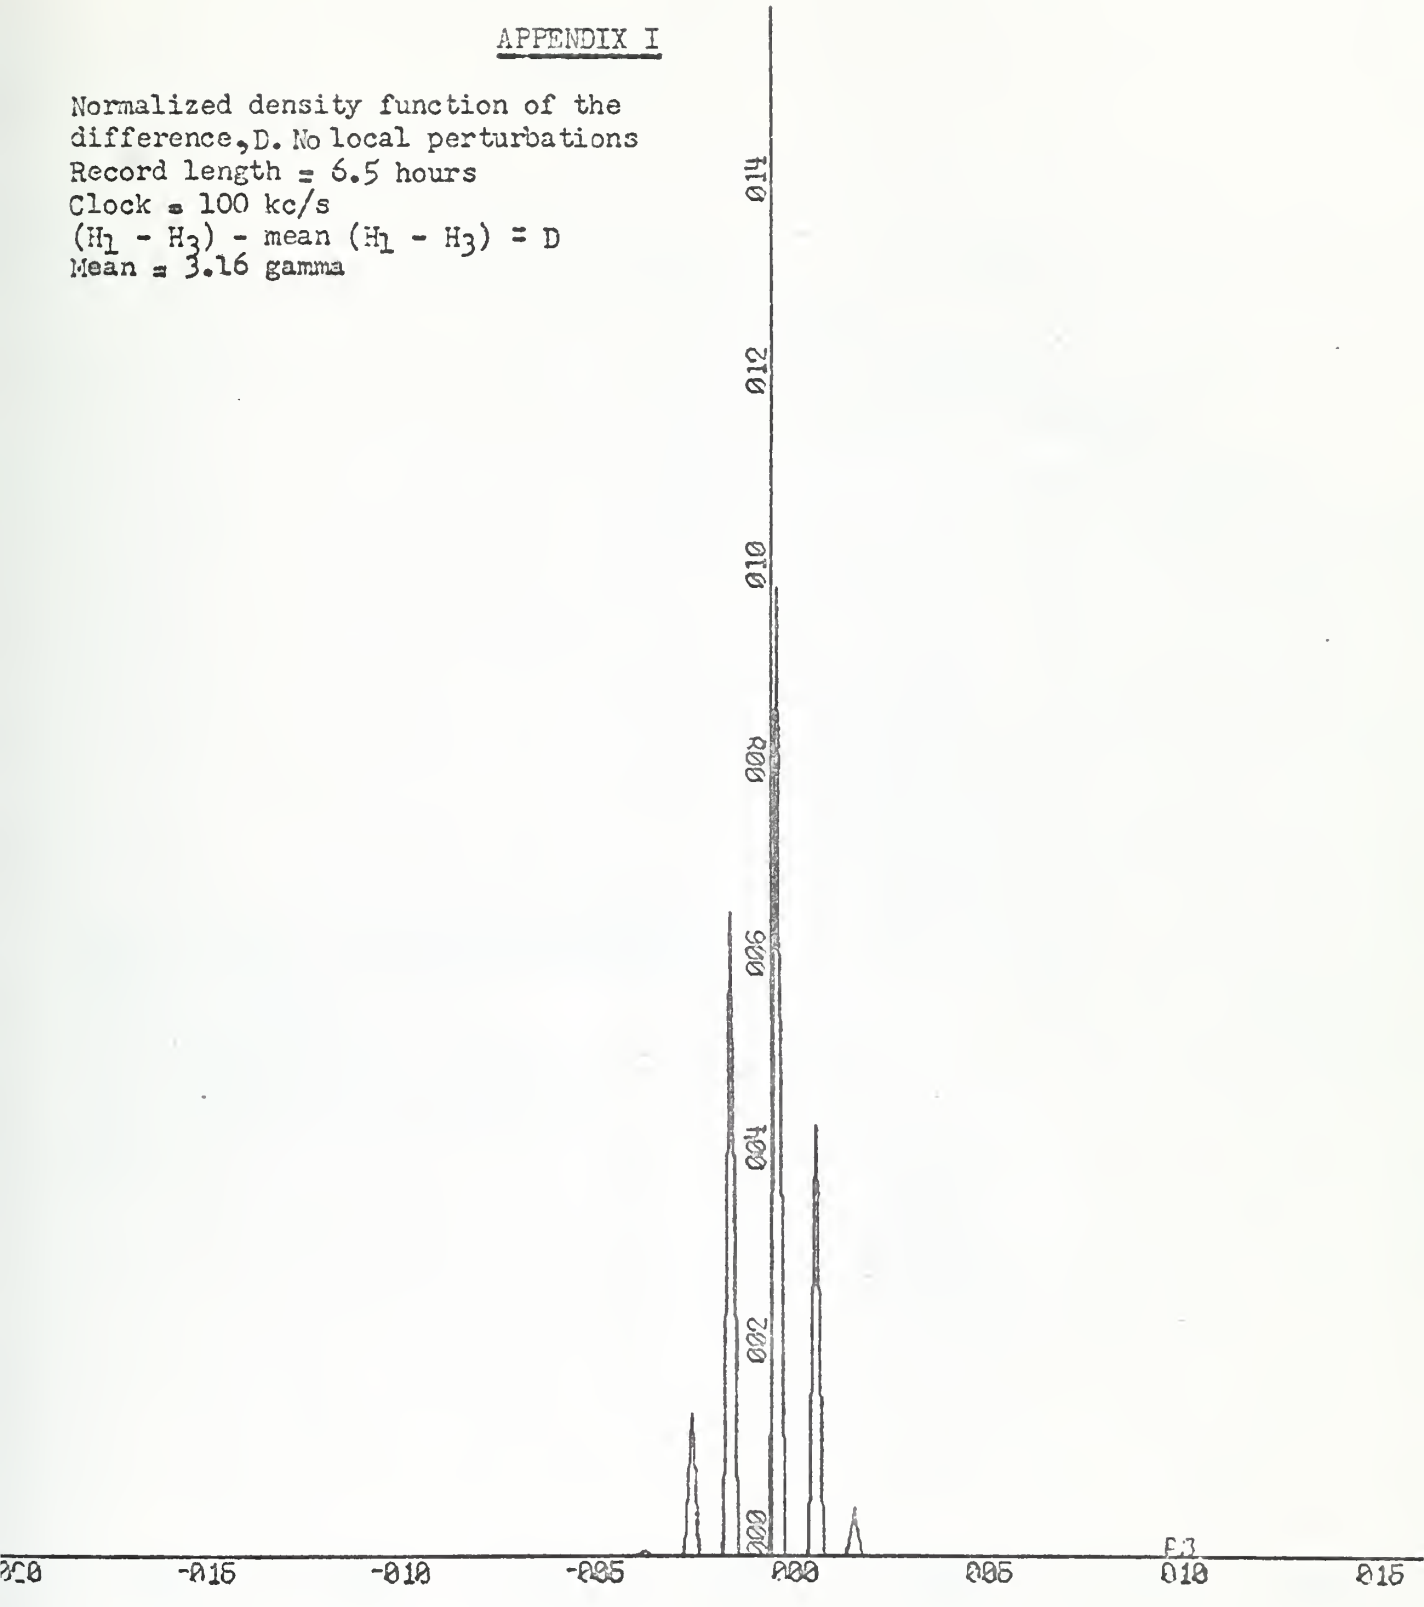

X-SCALE = 5.00E+00 UNITS/INCH.
Y-SCALE = 2.00E-01 UNITS/INCH.

ANDERSON BOX 263
DENSITY FUNCTION X IN GAMMA Y IN FREQ

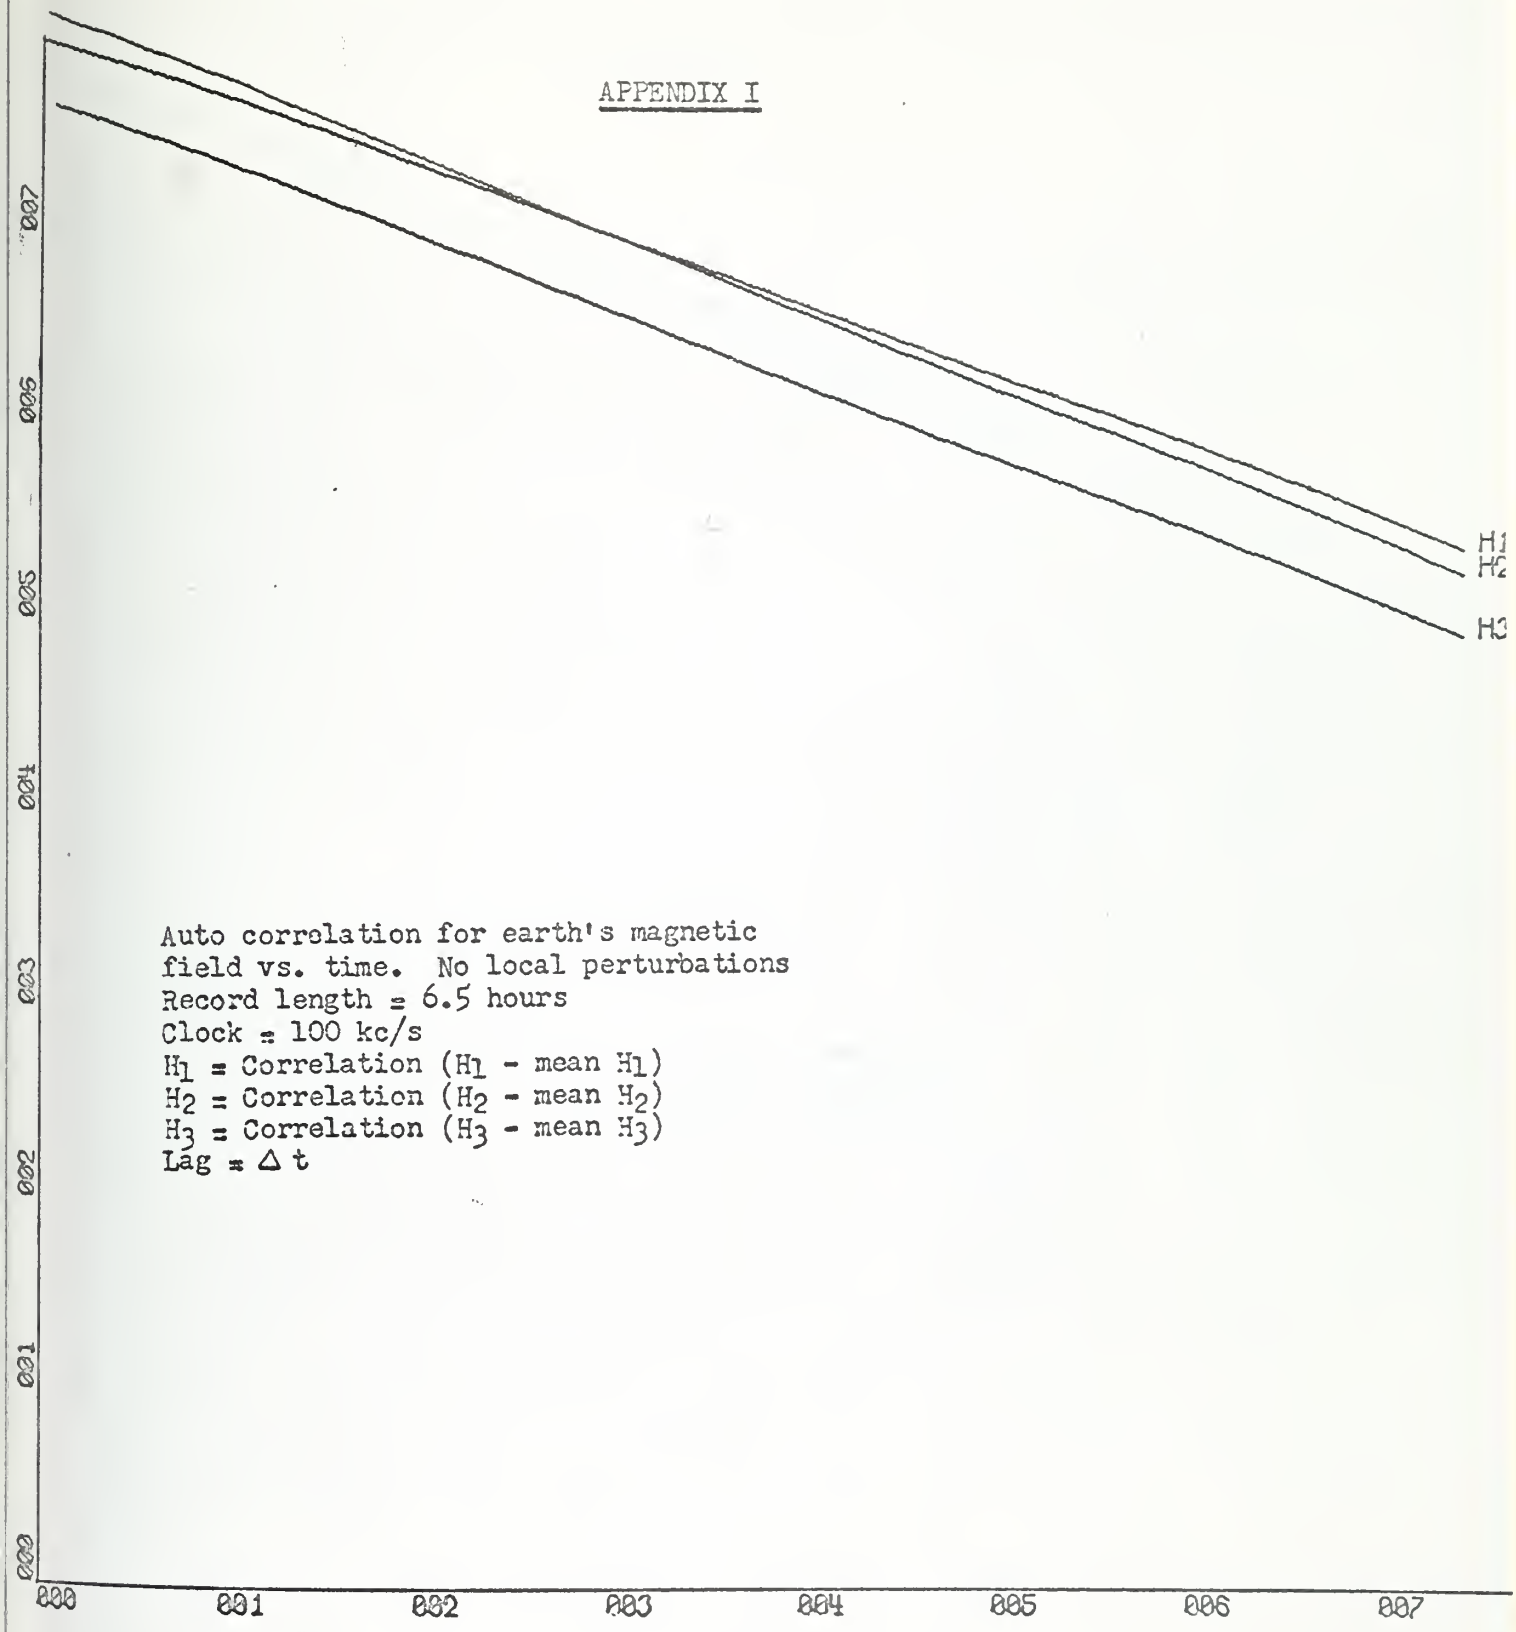

Auto correlation for earth's magnetic
field vs. time. No local perturbations
Record length = 6.5 hours
Clock = 100 kc/s
H_1 = Correlation (H_1 - mean H_1)
H_2 = Correlation (H_2 - mean H_2)
H_3 = Correlation (H_3 - mean H_3)
Lag = Δ t

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 1.00E+01 UNITS/INCH.

ANDERSON BOX 263
AUTOCORRELATION FUNCTION Y IN PRODUCTS X IN LAGS

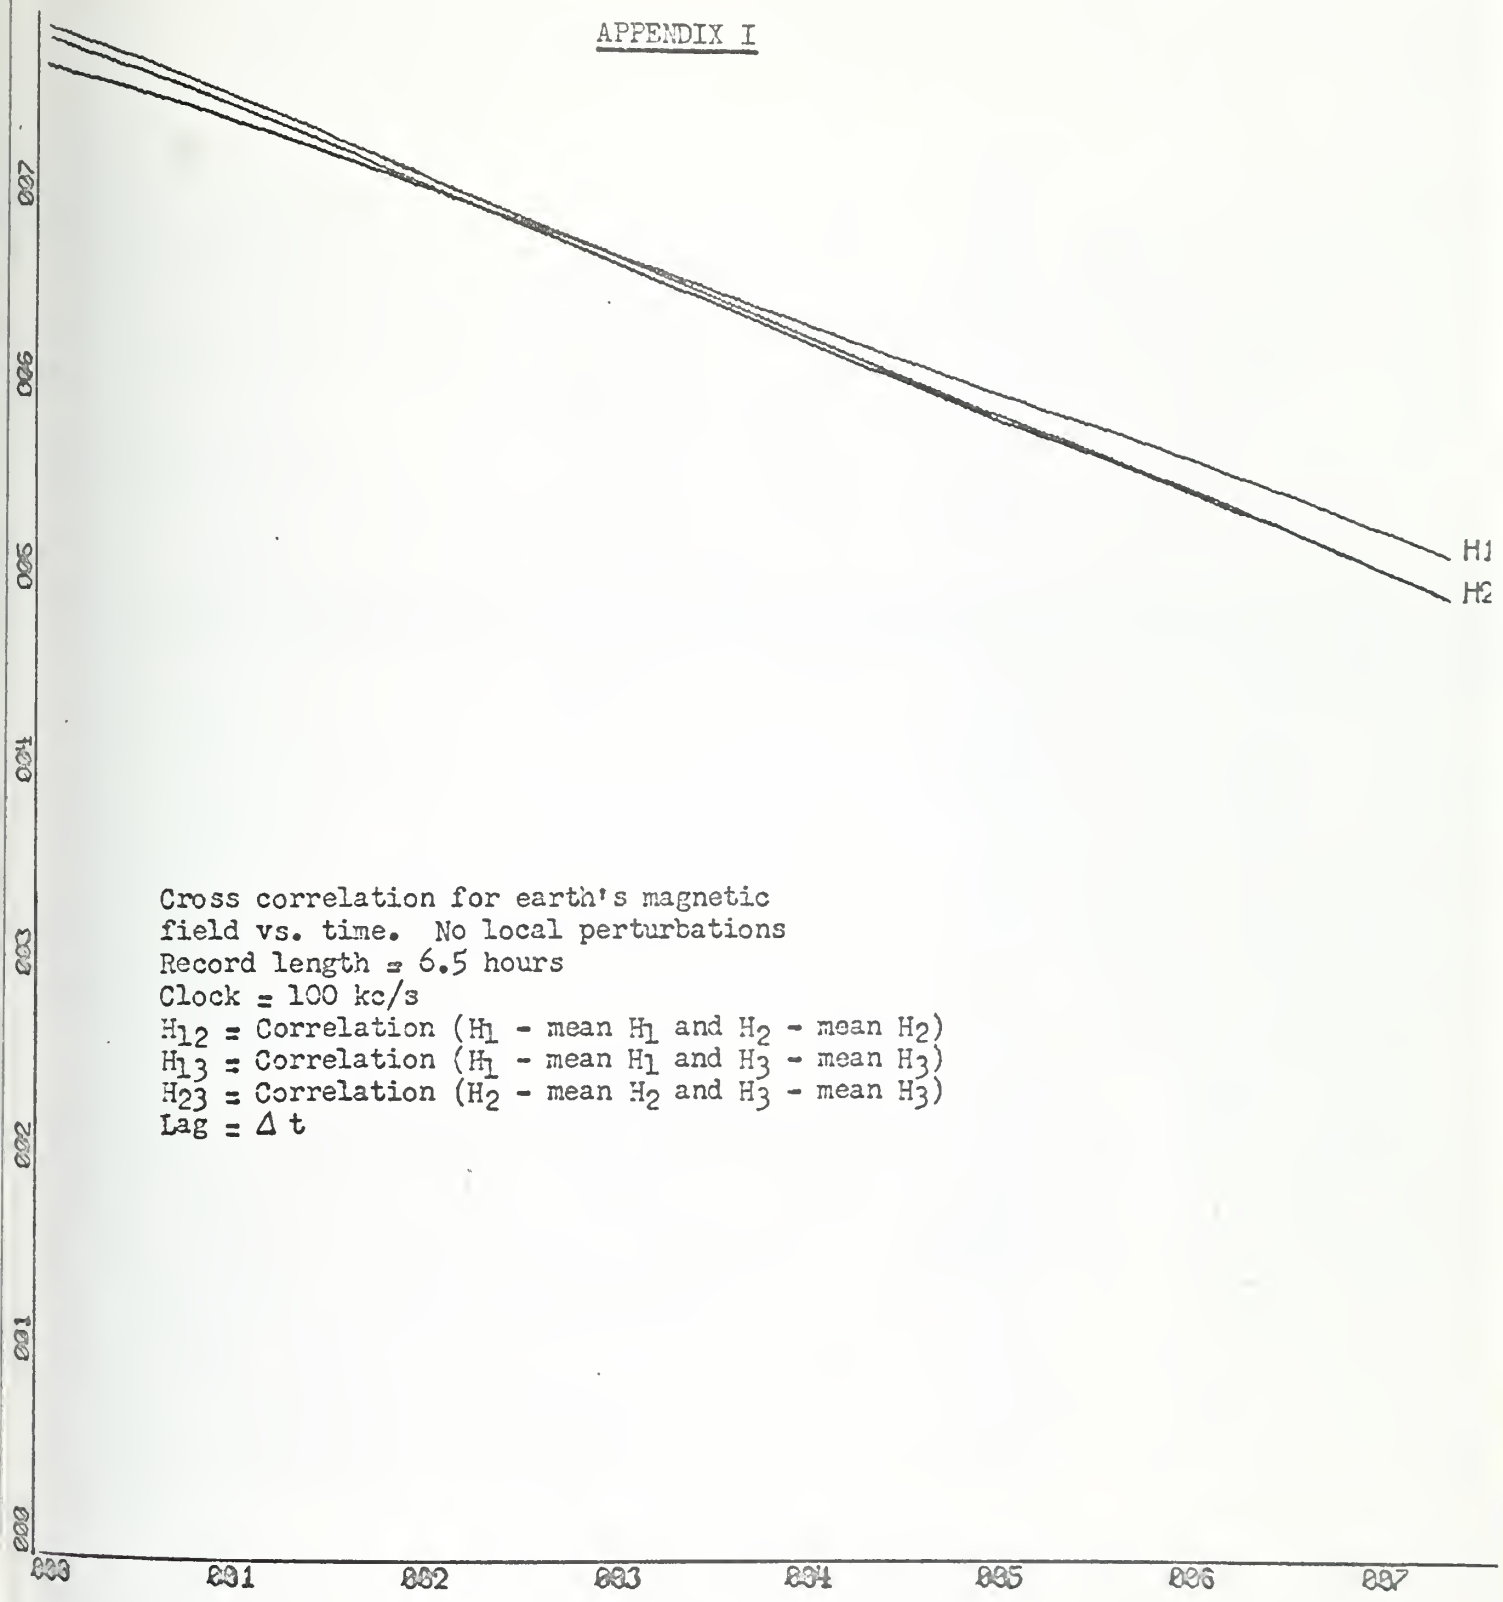

Cross correlation for earth's magnetic
field vs. time. No local perturbations
Record length = 6.5 hours
Clock = 100 kc/s
H_{12} = Correlation (H_1 - mean H_1 and H_2 - mean H_2)
H_{13} = Correlation (H_1 - mean H_1 and H_3 - mean H_3)
H_{23} = Correlation (H_2 - mean H_2 and H_3 - mean H_3)
Lag = Δ t

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 1.00E+01 UNITS/INCH.

ANDERSON BOX 263
CROSCORRELATION FUNCTION Y IN PRODUCTS X IN LAGS

APPENDIX I

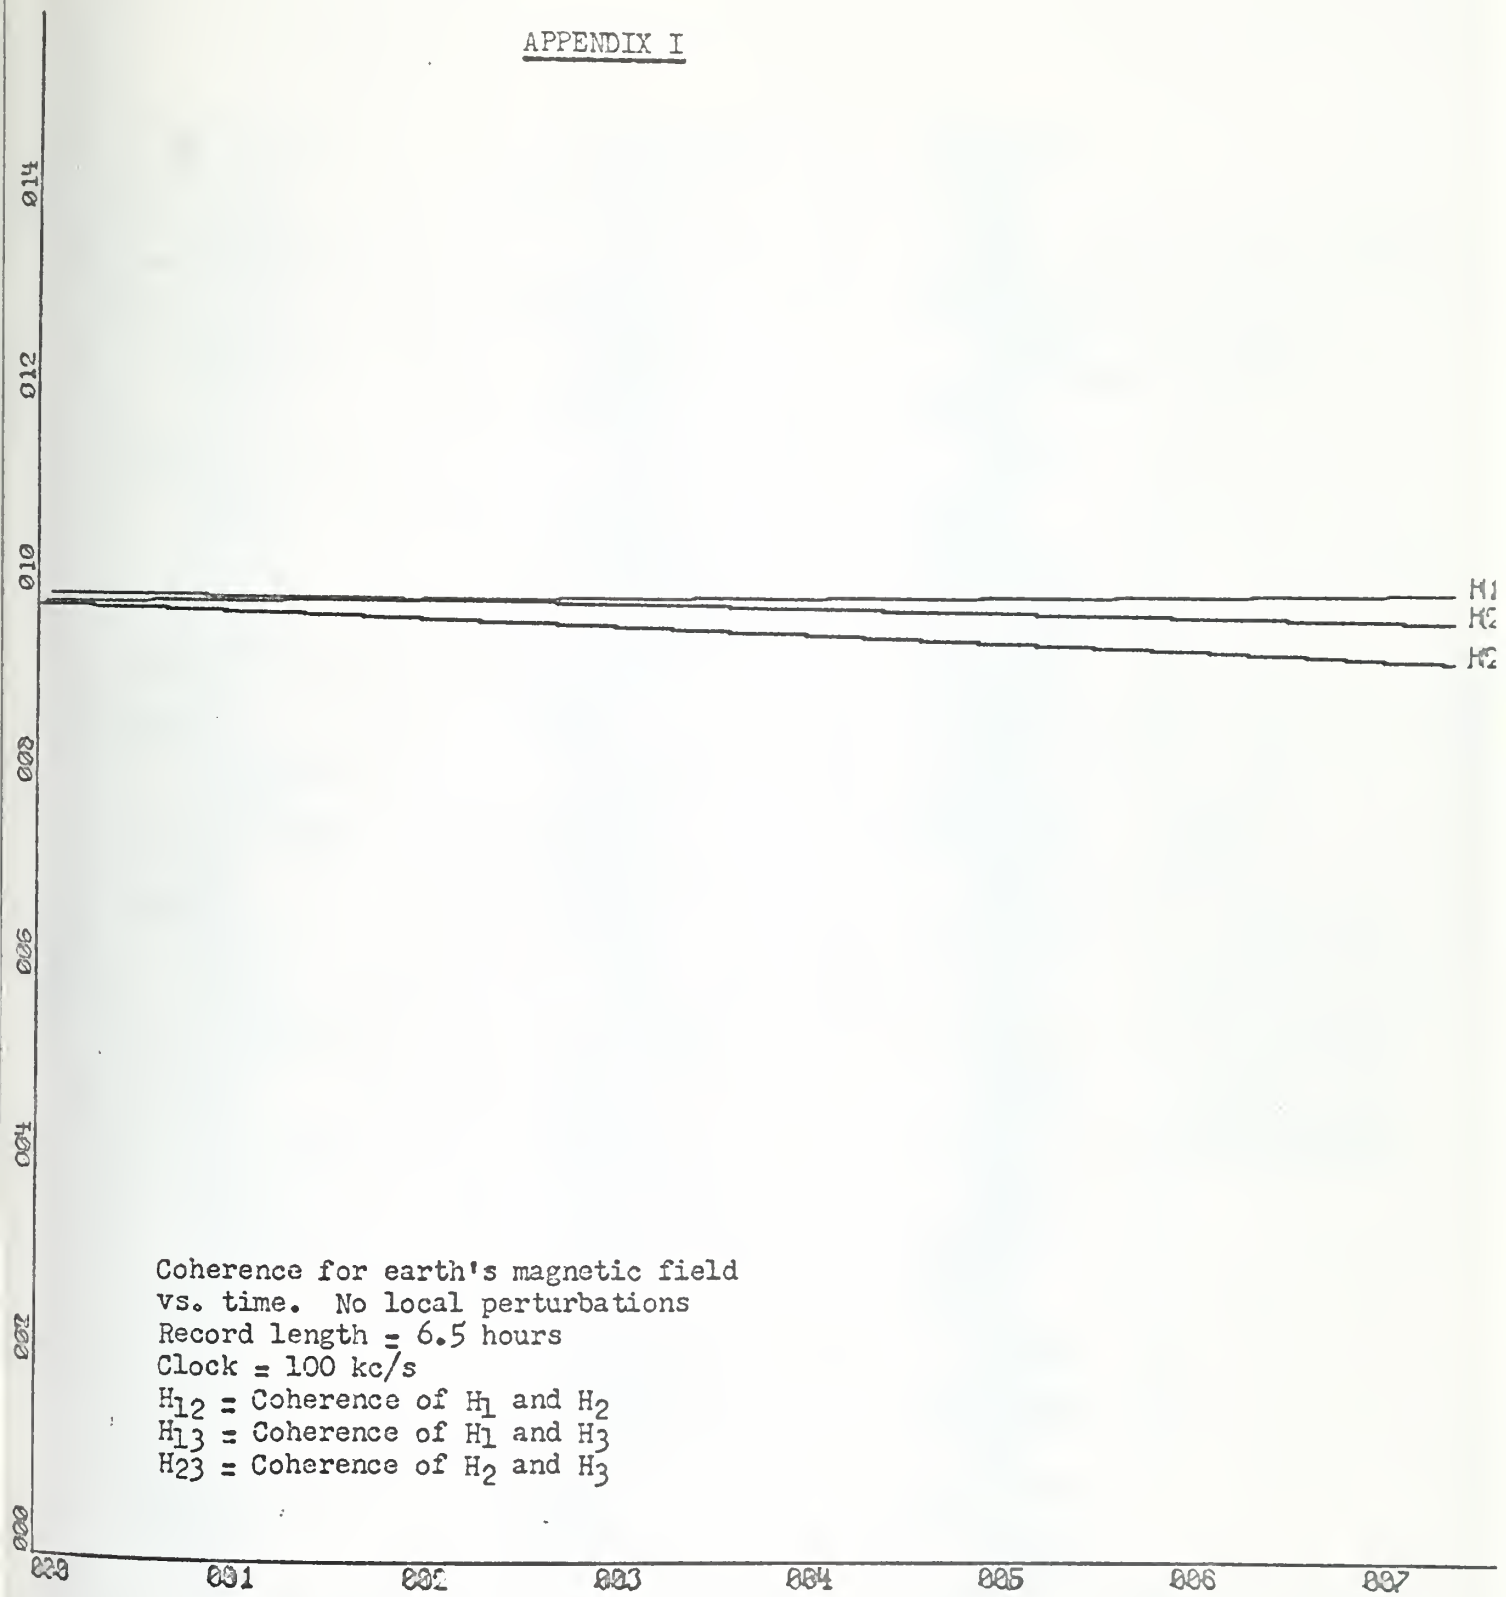

Coherence for earth's magnetic field
vs. time. No local perturbations
Record length = 6.5 hours
Clock = 100 kc/s
H_{12} = Coherence of H_1 and H_2
H_{13} = Coherence of H_1 and H_3
H_{23} = Coherence of H_2 and H_3

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 2.00E-01 UNITS/INCH.

ANDERSON BOX 263
COHERENCE FUNCTION Y IN COH X IN LAGS

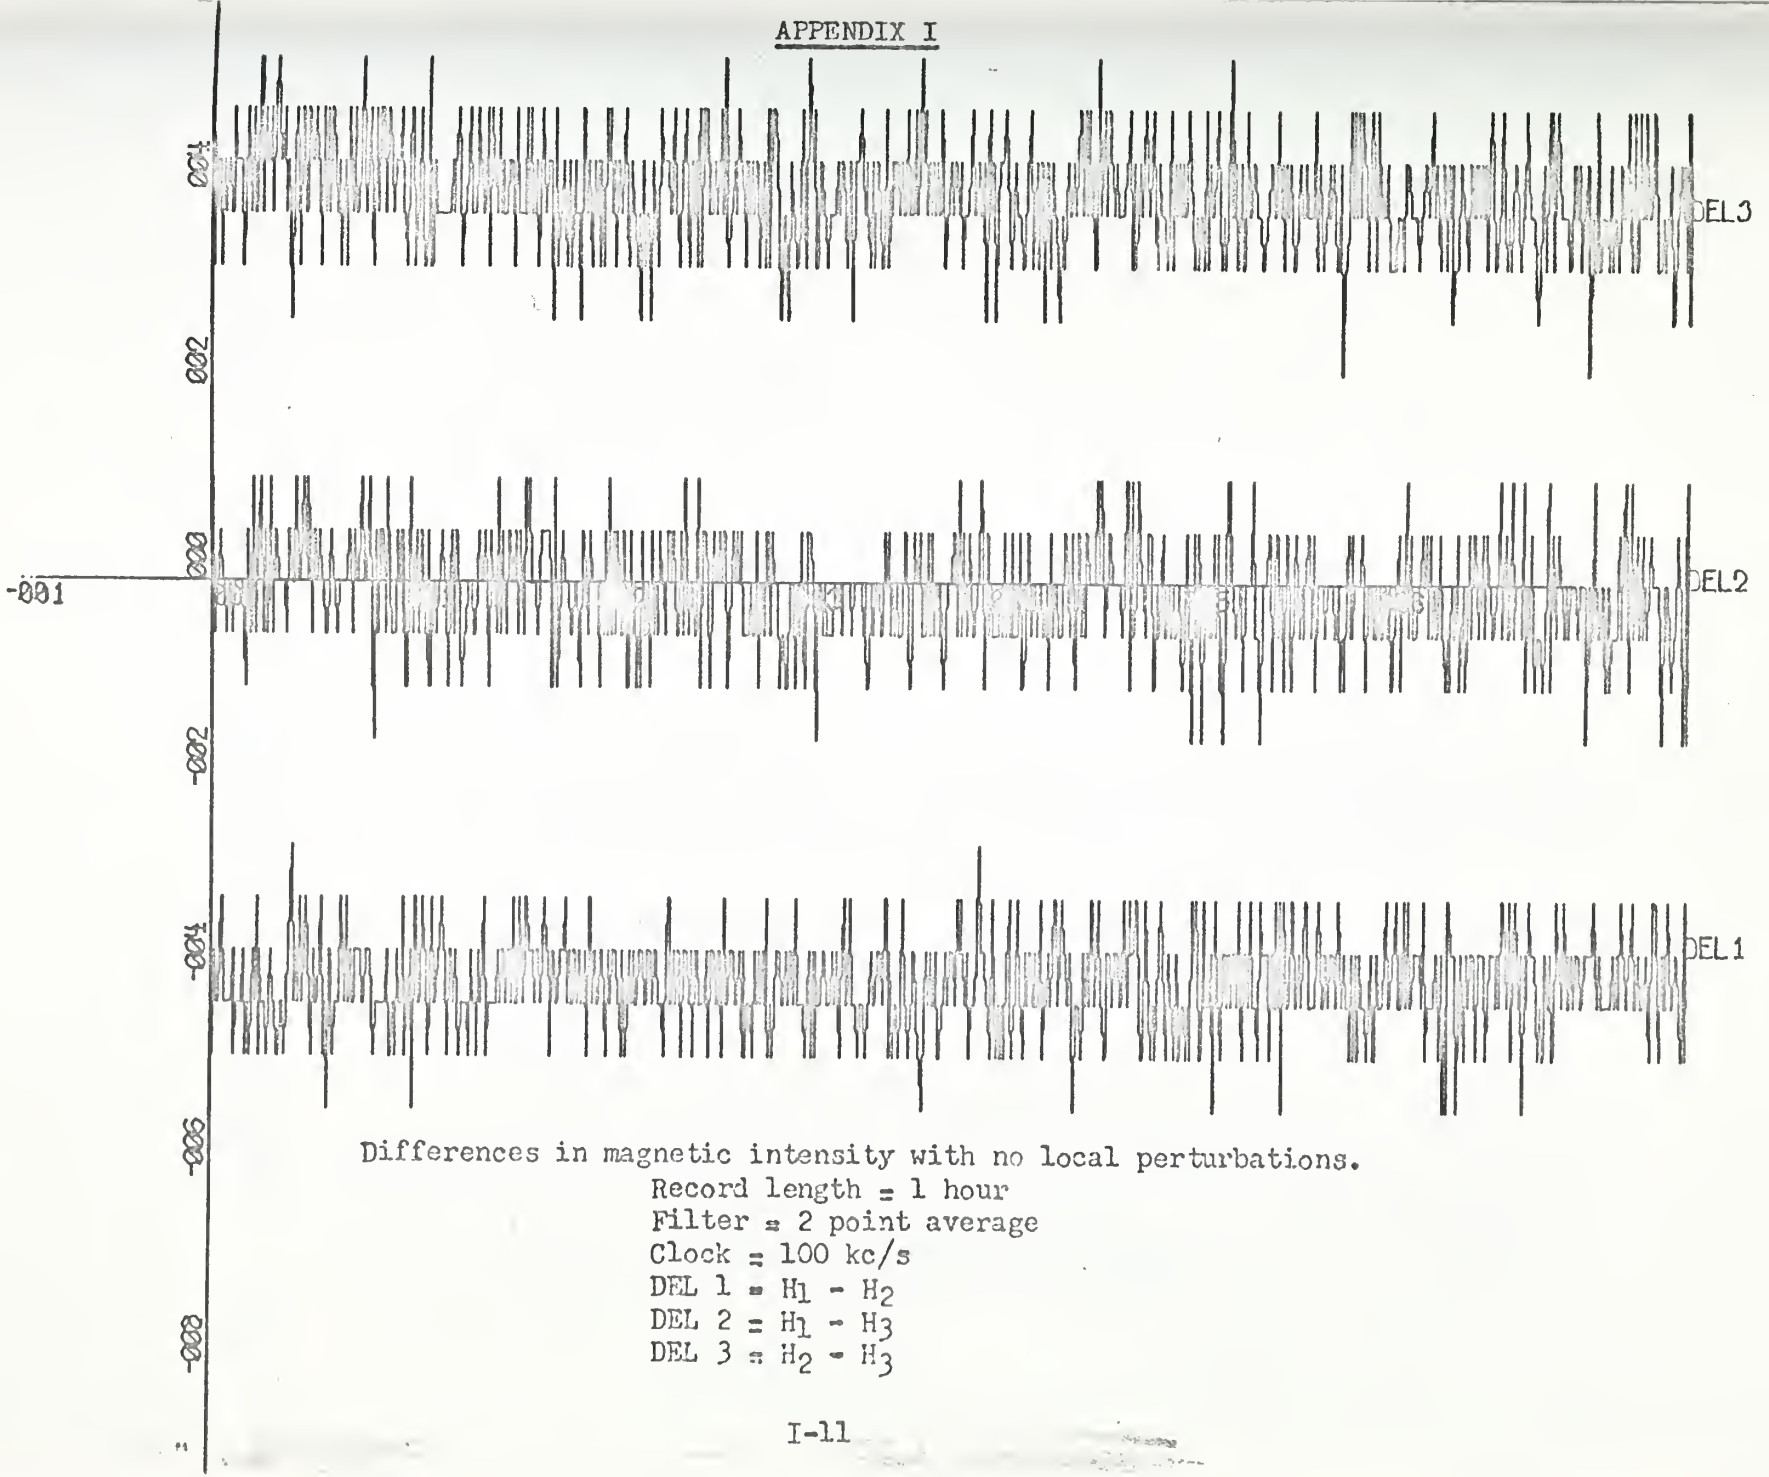

Differences in magnetic intensity with no local perturbations.
Record length = 1 hour
Filter = 2 point average
Clock = 100 kc/s
DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$

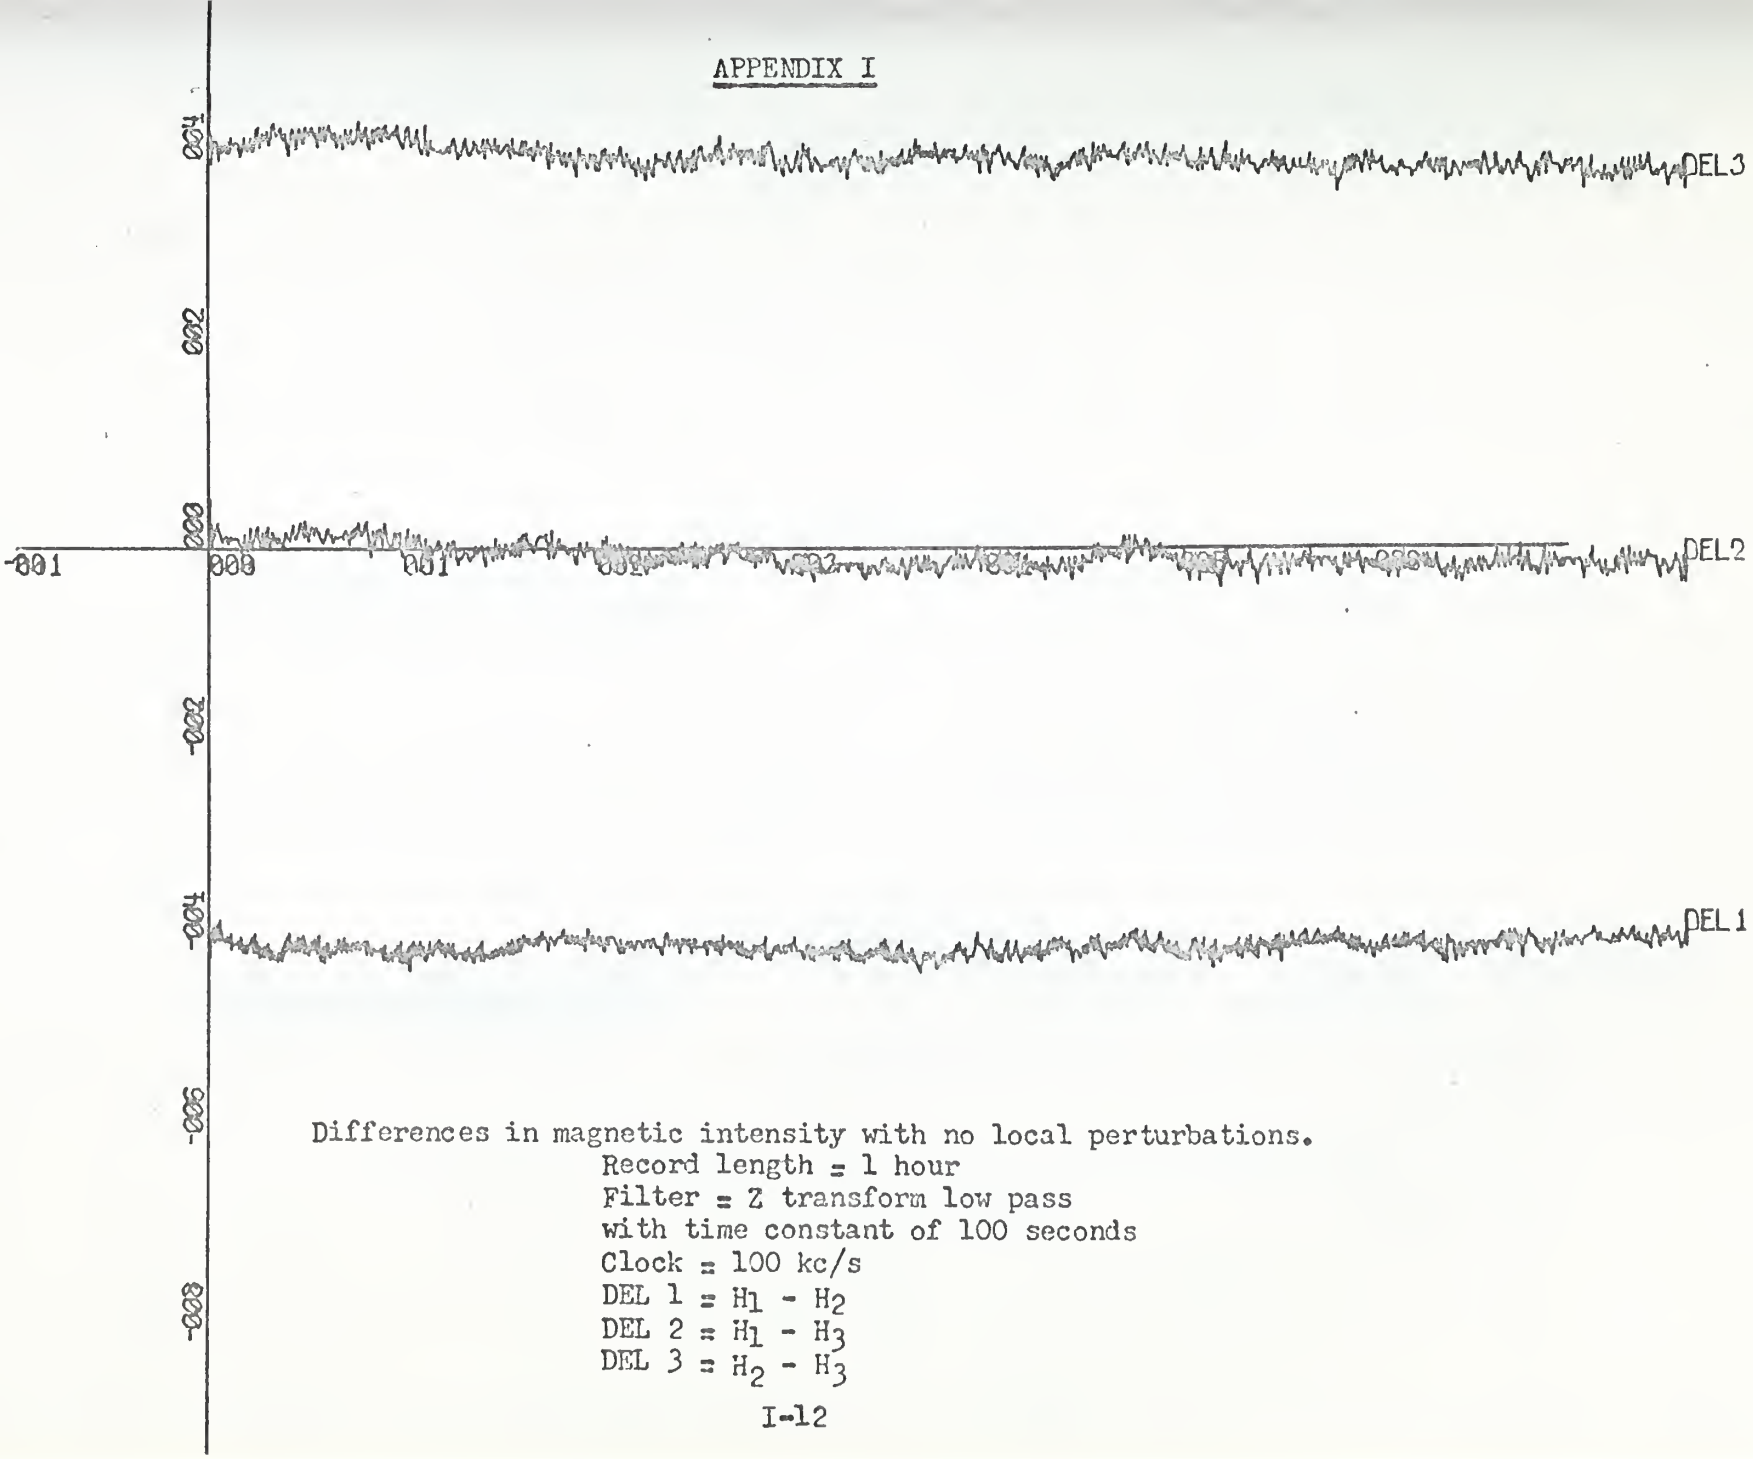

Differences in magnetic intensity with no local perturbations.
Record length = 1 hour
Filter = Z transform low pass
with time constant of 100 seconds
Clock = 100 kc/s
DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$

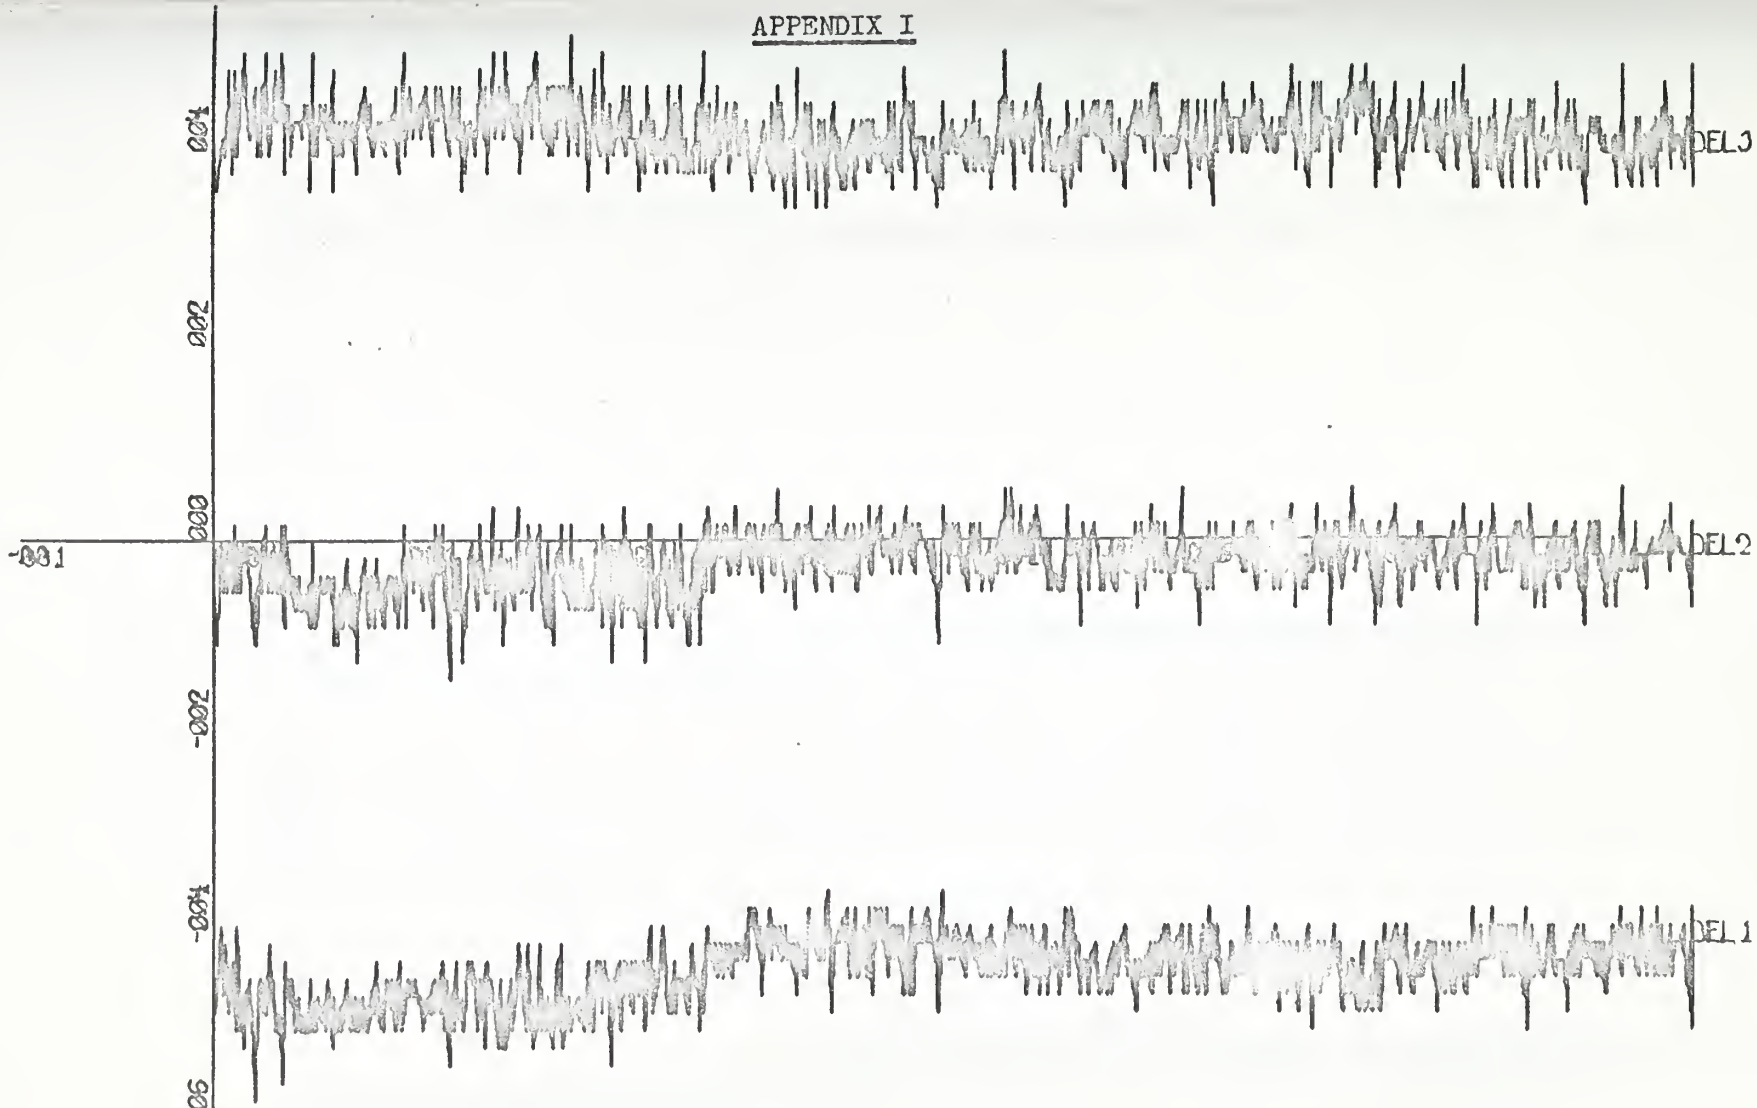

Differences in magnetic intensity with no local pertrubations.
Record length = 1 hour
Filter = 2 point average
Clock = 300 kc/s
DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$

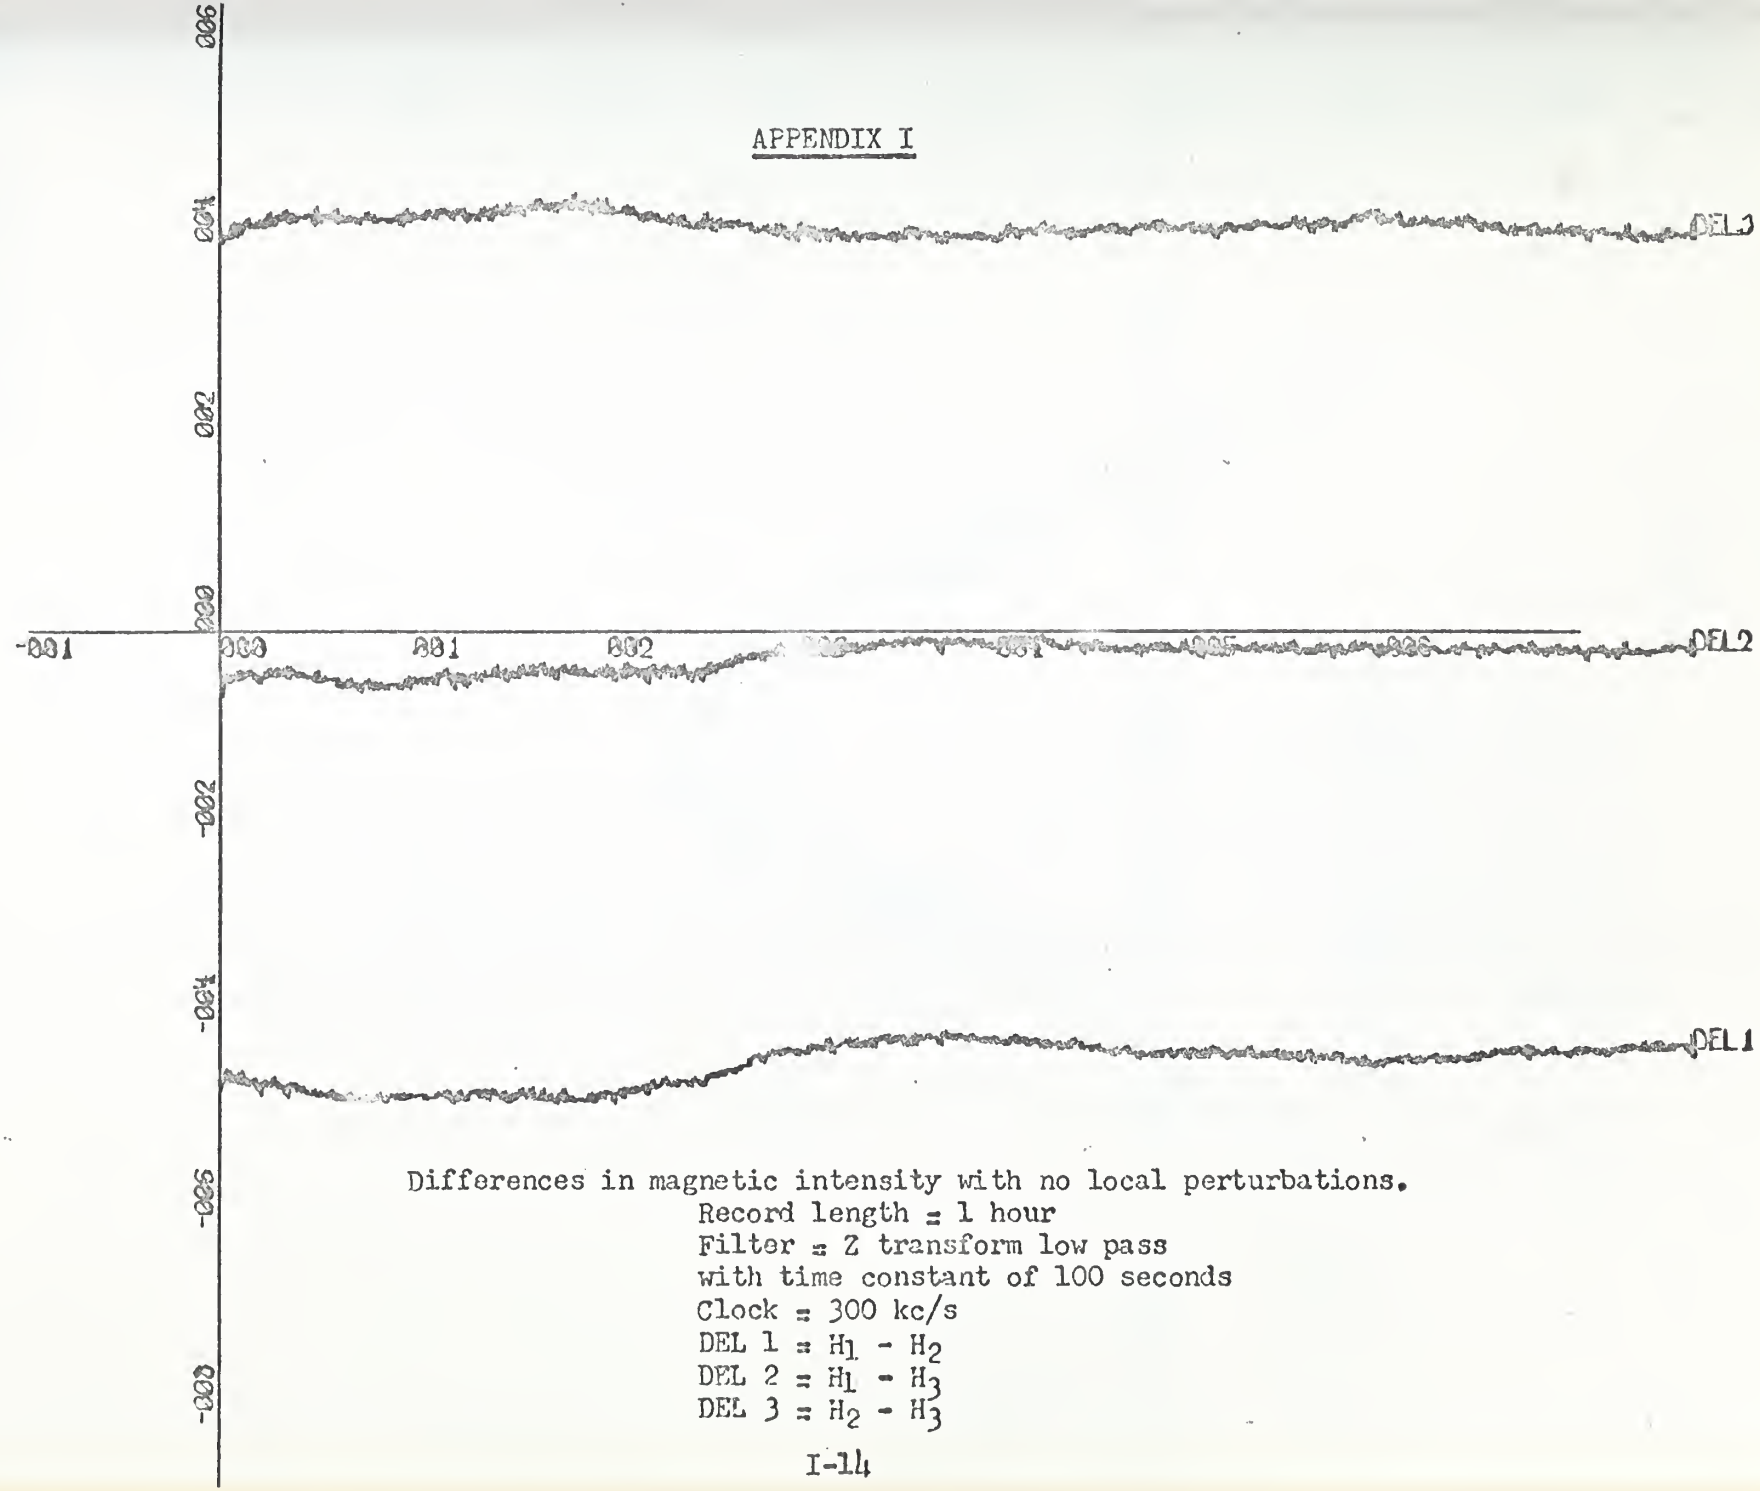

Differences in magnetic intensity with no local perturbations.
Record length = 1 hour
Filter = Z transform low pass
with time constant of 100 seconds
Clock = 300 kc/s
DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$

APPENDIX I

Typical earth's magnetic field vs. time for clock at 300 kc/s and no local perturbations.
Record length = 6.5 hours
$H_1 = H_1$ - mean H_1
$H_2 = H_2$ - mean H_1
$H_3 = H_3$ - mean H_1
Filter = 18 point average
Mean H_1 = 0.509161 E + 05

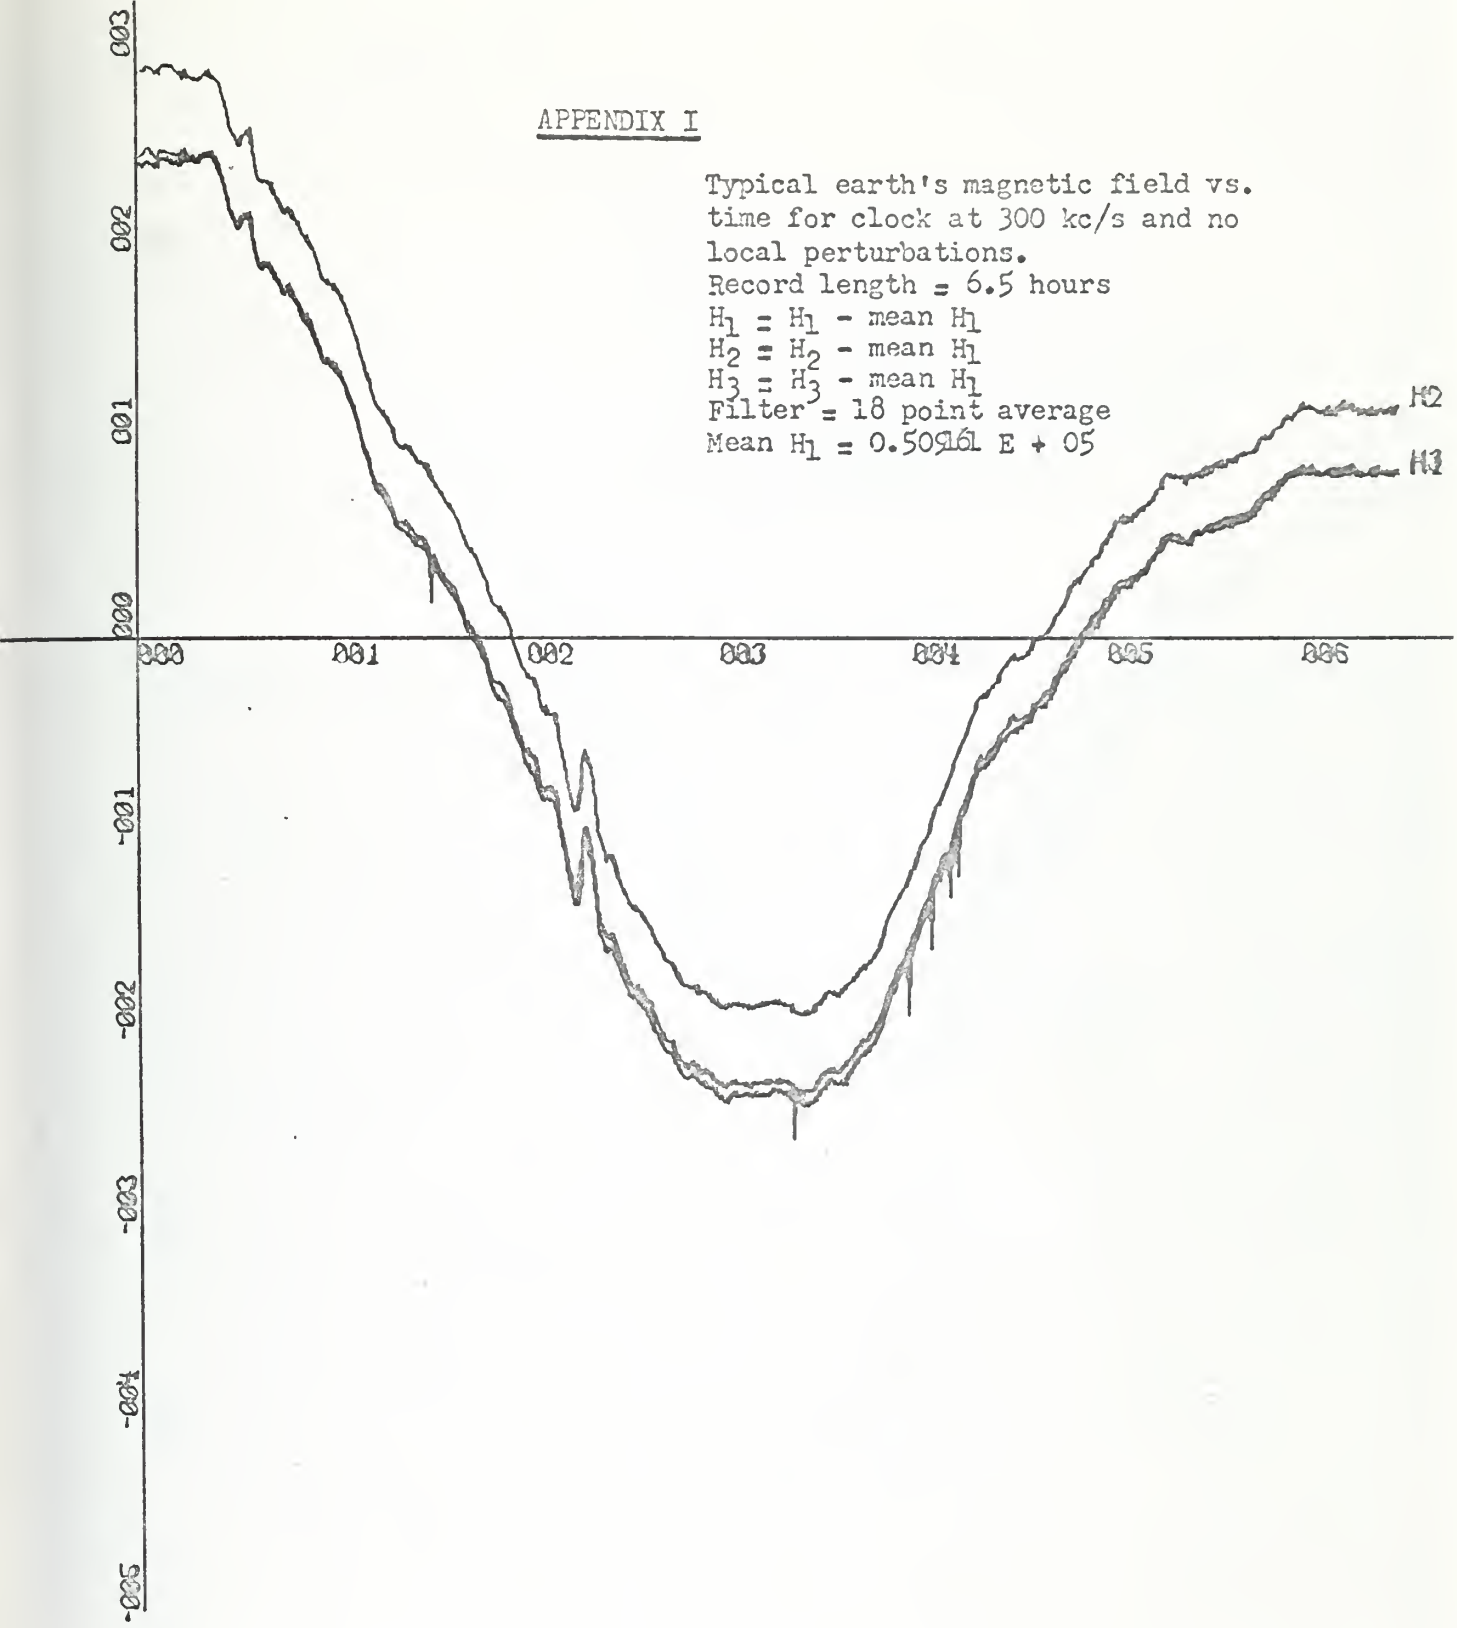

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 1.00E+01 UNITS/INCH.

NDERSON BOX 263
EARTHS MAGNETIC FIELD VS TIME T IN HRS H GAMMA

APPENDIX I

Typical earth's magnetic field vs. time for clock at 300 kc/s and no local perturbations.
Record length = 6.5 hours
$H_1 = H_1$ - mean H_1
$H_2 = H_2$ - mean H_1
$H_3 = H_3$ - mean H_1
Filter = Z transform low pass with time constant = 20 minutes
Mean H_1 = 0.509161 E + 05

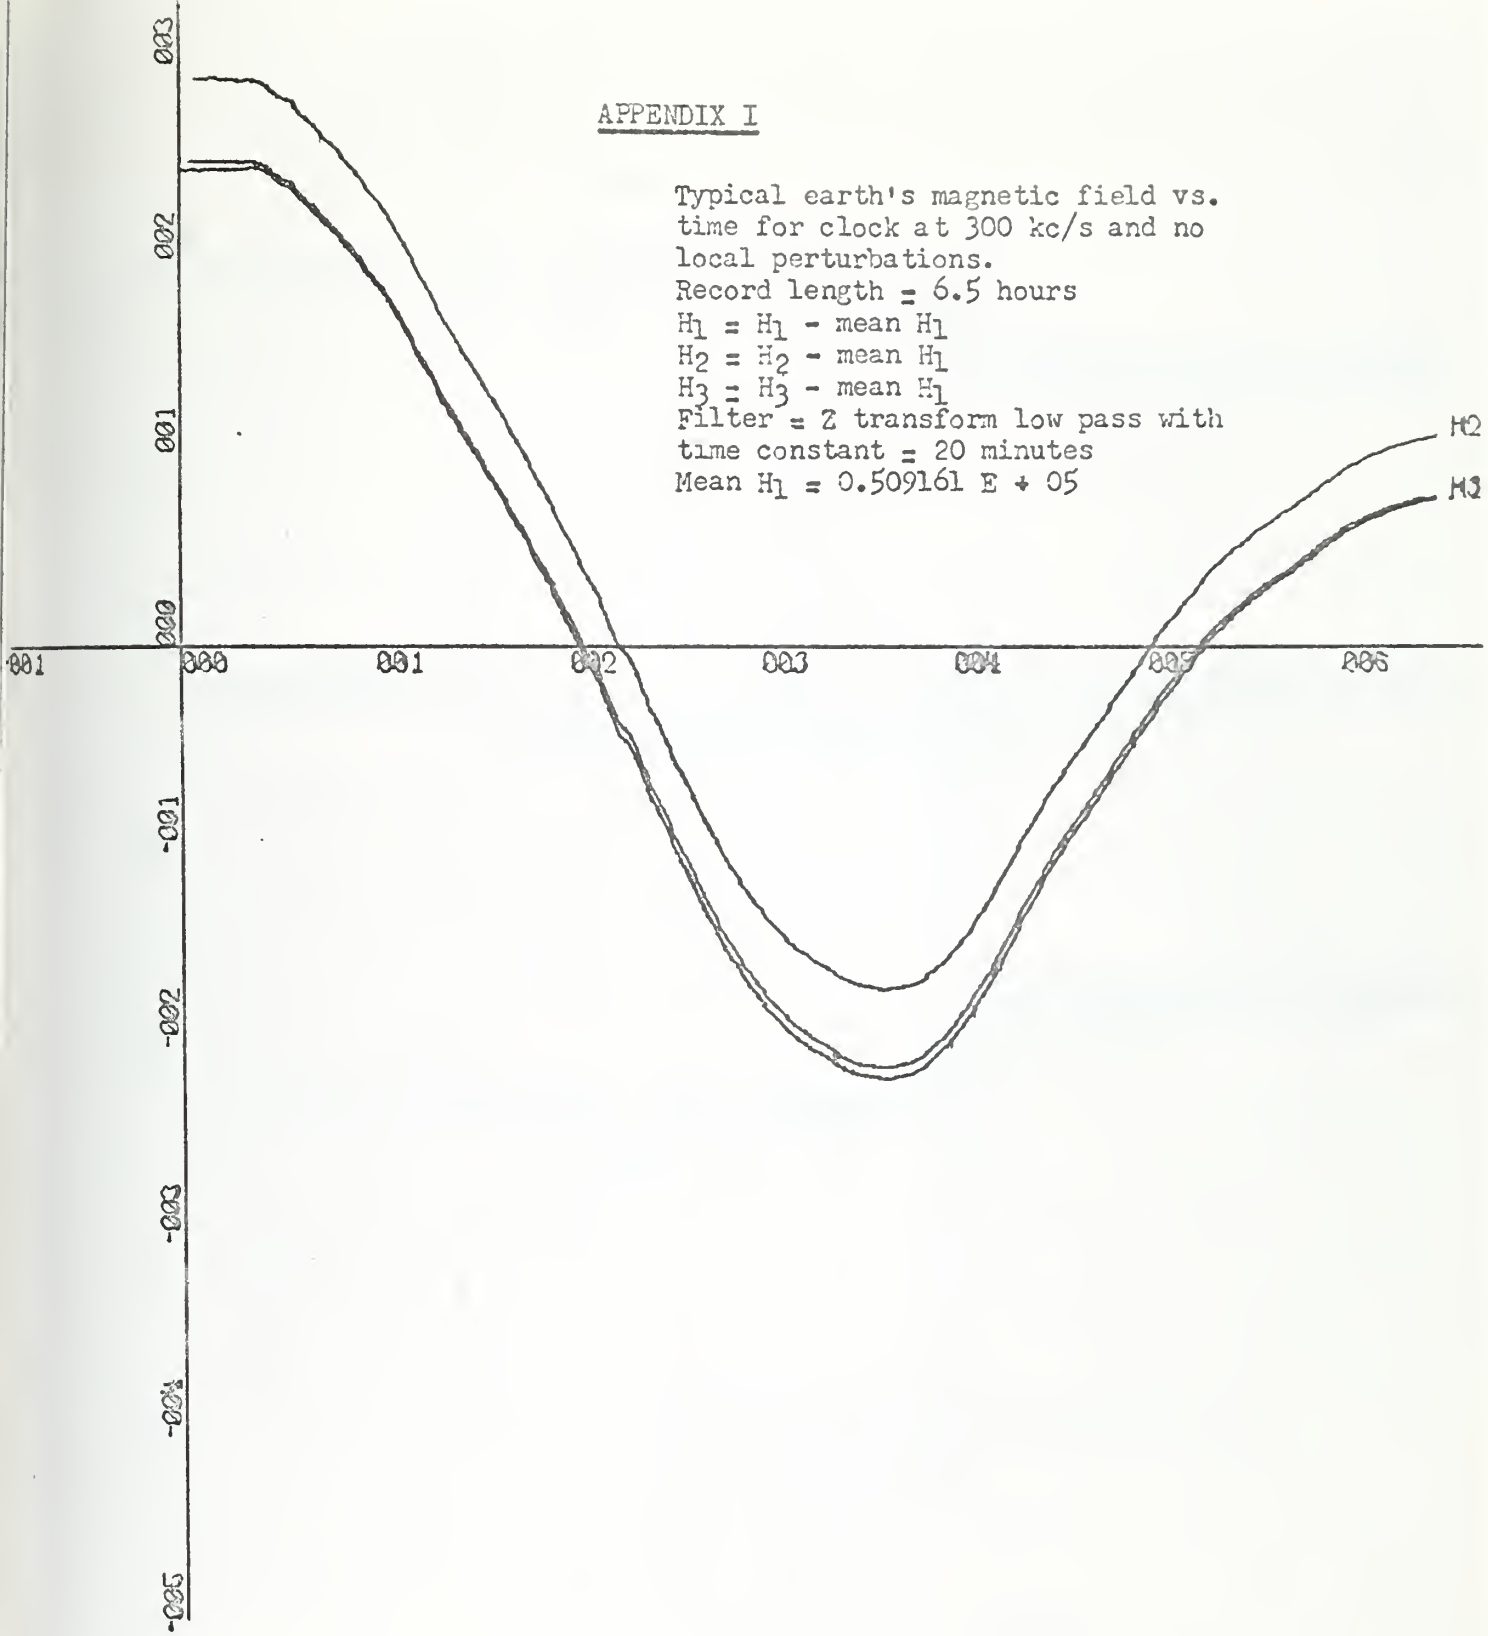

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 1.00E+01 UNITS/INCH.

ANDERSON FILTER
EARTHS MAGNETIC FIELD VS TIME T IN HRS H GAMM

APPENDIX I

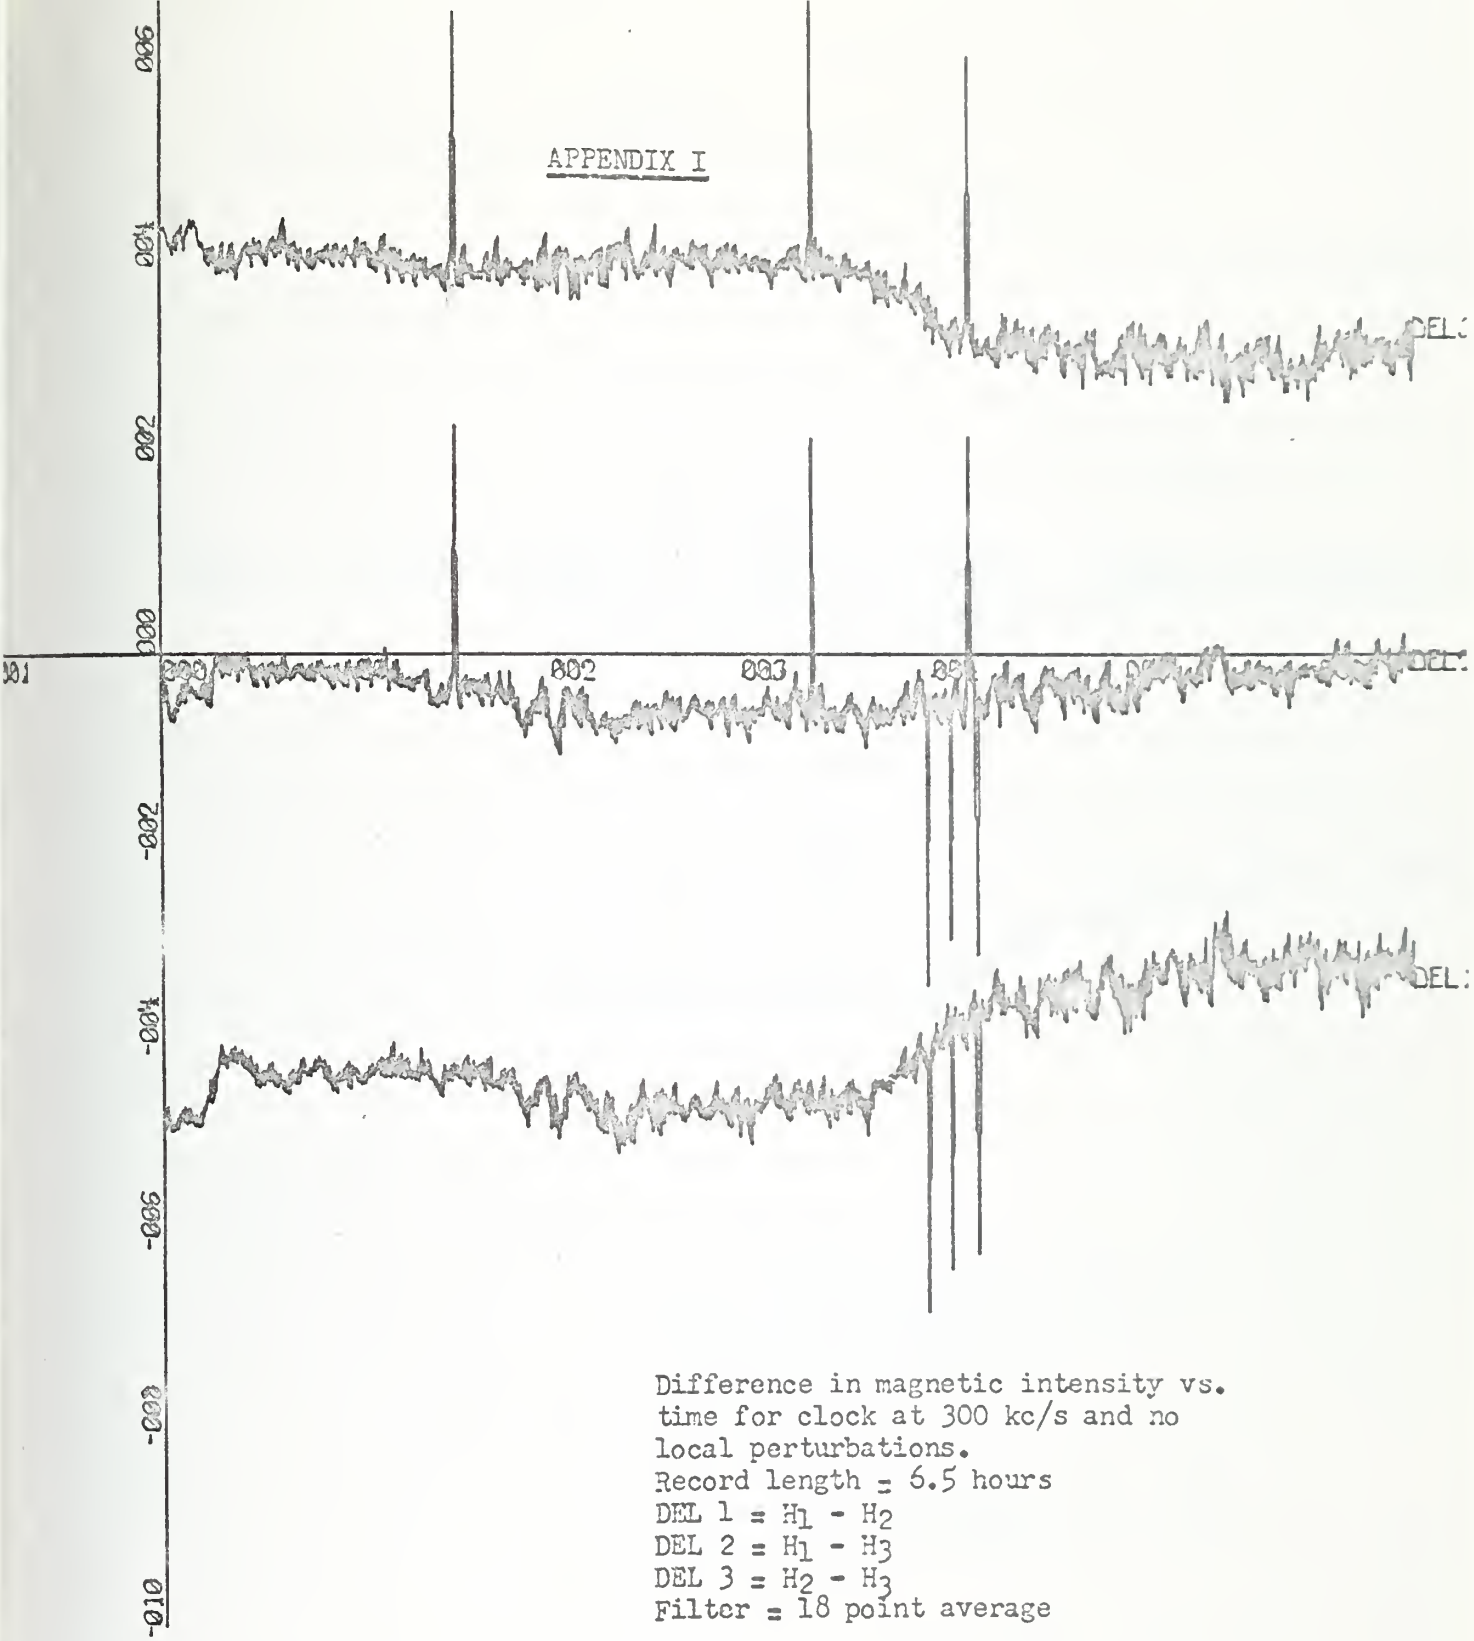

Difference in magnetic intensity vs. time for clock at 300 kc/s and no local perturbations.
Record length = 6.5 hours
DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$
Filter = 18 point average

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 2.00E+00 UNITS/INCH.

ANDERSON BOX 263
FIRST DIFFERENCE IN MAG FIELD T IN HRS H GAMMA

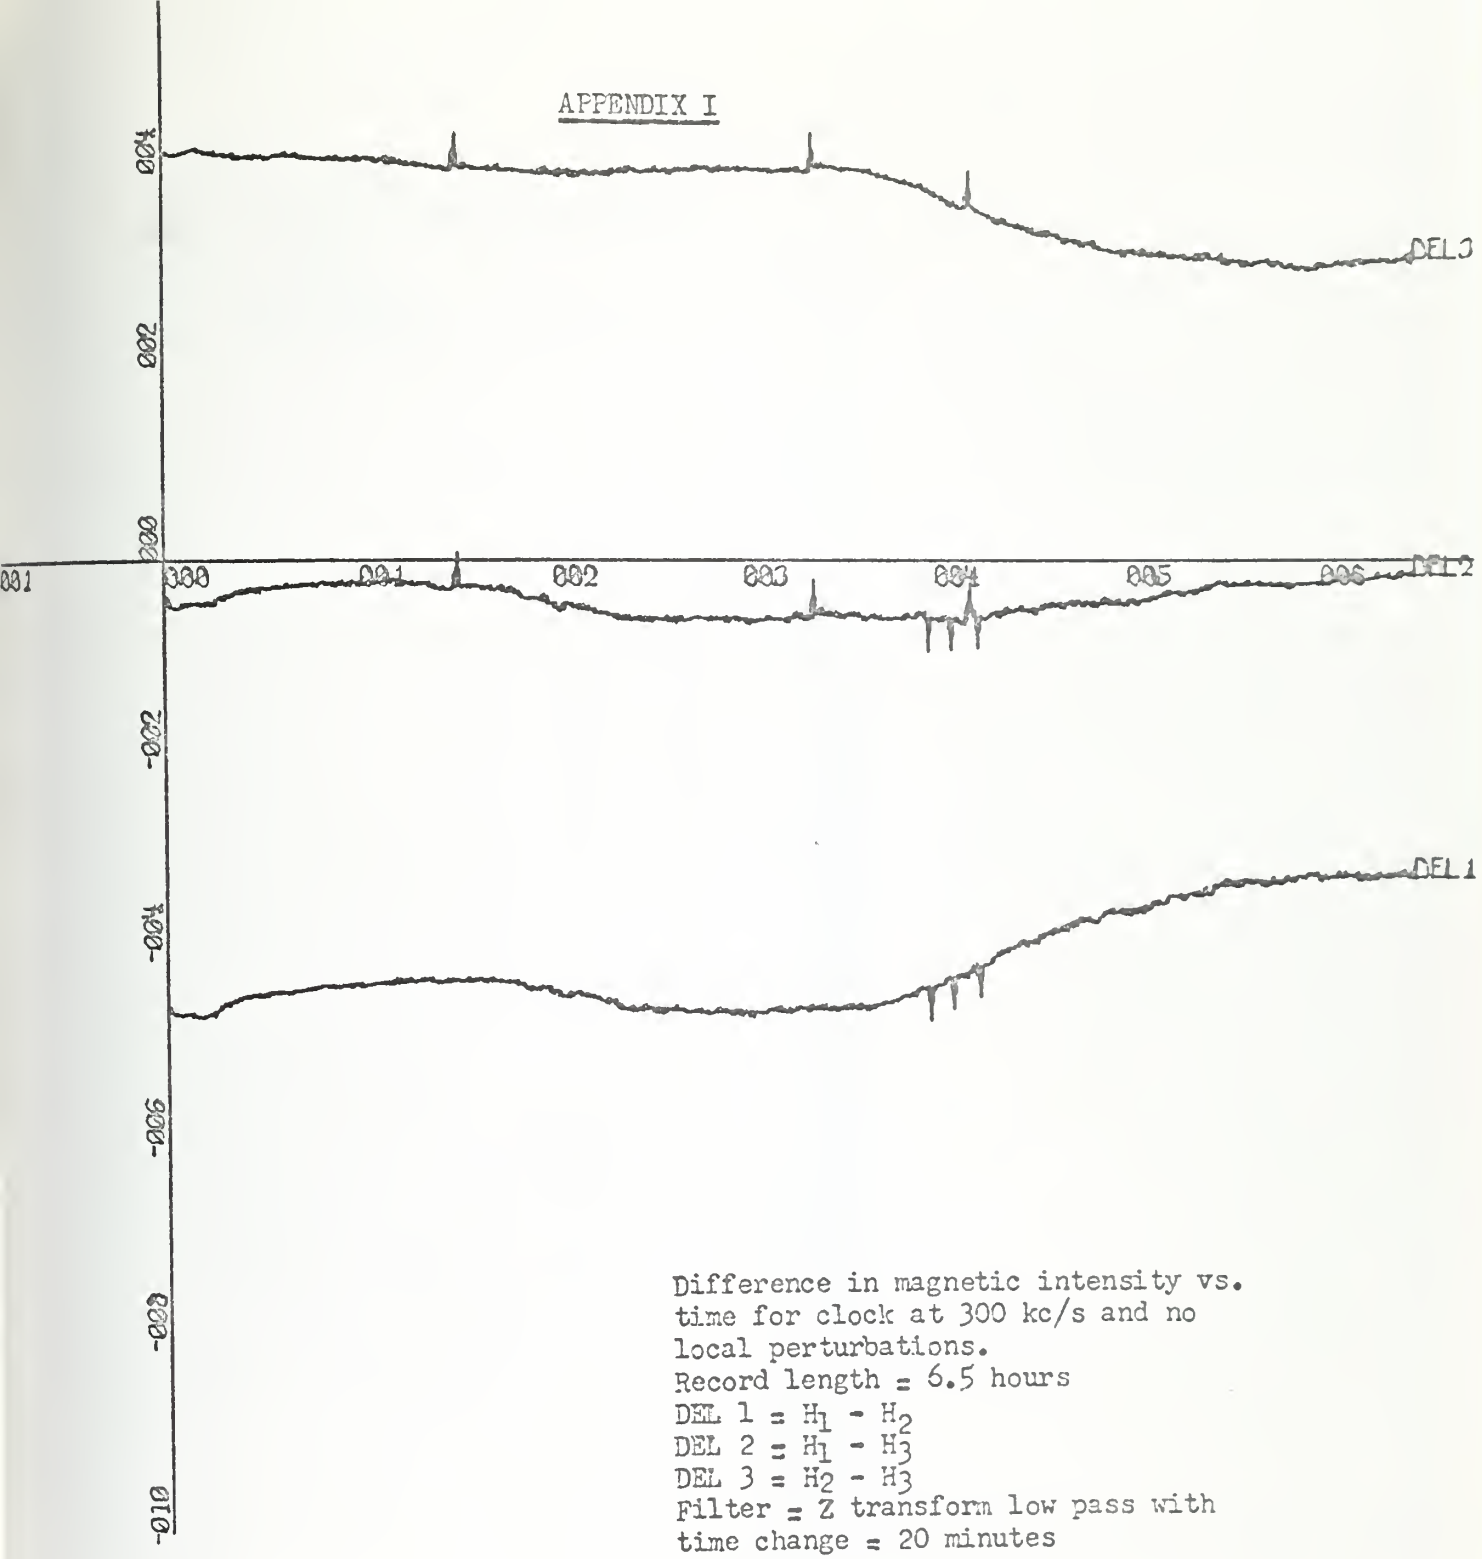

Difference in magnetic intensity vs. time for clock at 300 kc/s and no local perturbations.
Record length = 6.5 hours
DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$
Filter = Z transform low pass with time change = 20 minutes

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 2.00E+00 UNITS/INCH.
ANDERSON FILTER
FILTEREDDIFFERENCE IN MAG FIELD T IN HRS H GAMMA

APPENDIX I

Normalized density function of the difference, D. No local perturbations
Record length = 6.5 hours
Clock = 300 kc/s
$(H_1 - H_2)$ - mean $(H_1 - H_2)$ = D
Mean = -4.09 gamma

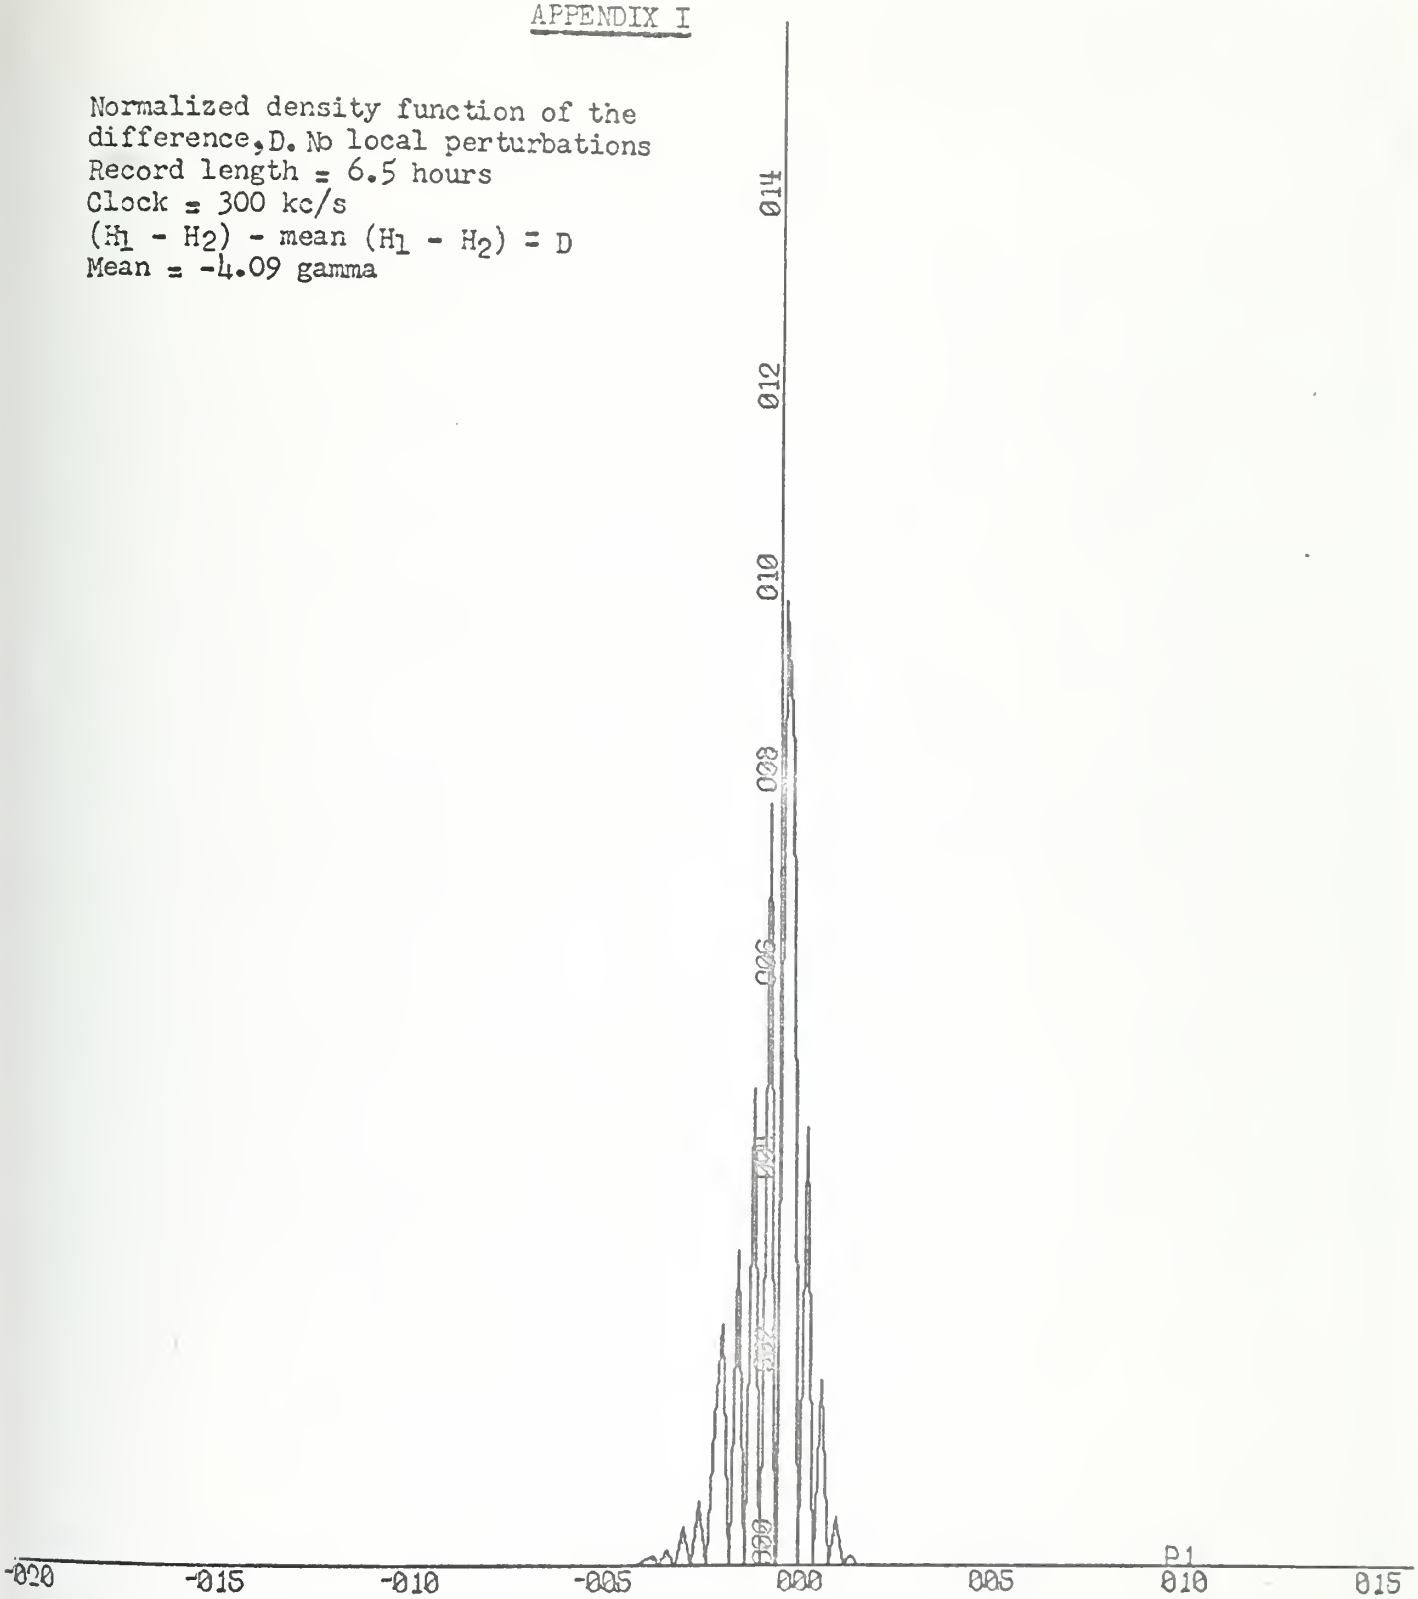

X-SCALE = 5.00E+00 UNITS/INCH.
Y-SCALE = 2.00E-01 UNITS/INCH.

ANDERSON BOX 263
DENSITY FUNCTION X IN GAMMA Y IN FREQ

APPENDIX I

Normalized density function of the difference, D. Nb local perturbations
Record length = 6.5 hours
Clock = 300 kc/s
$(H_2 - H_3)$ - mean $(H_2 - H_3)$ = D
Mean = -0.38 gamma

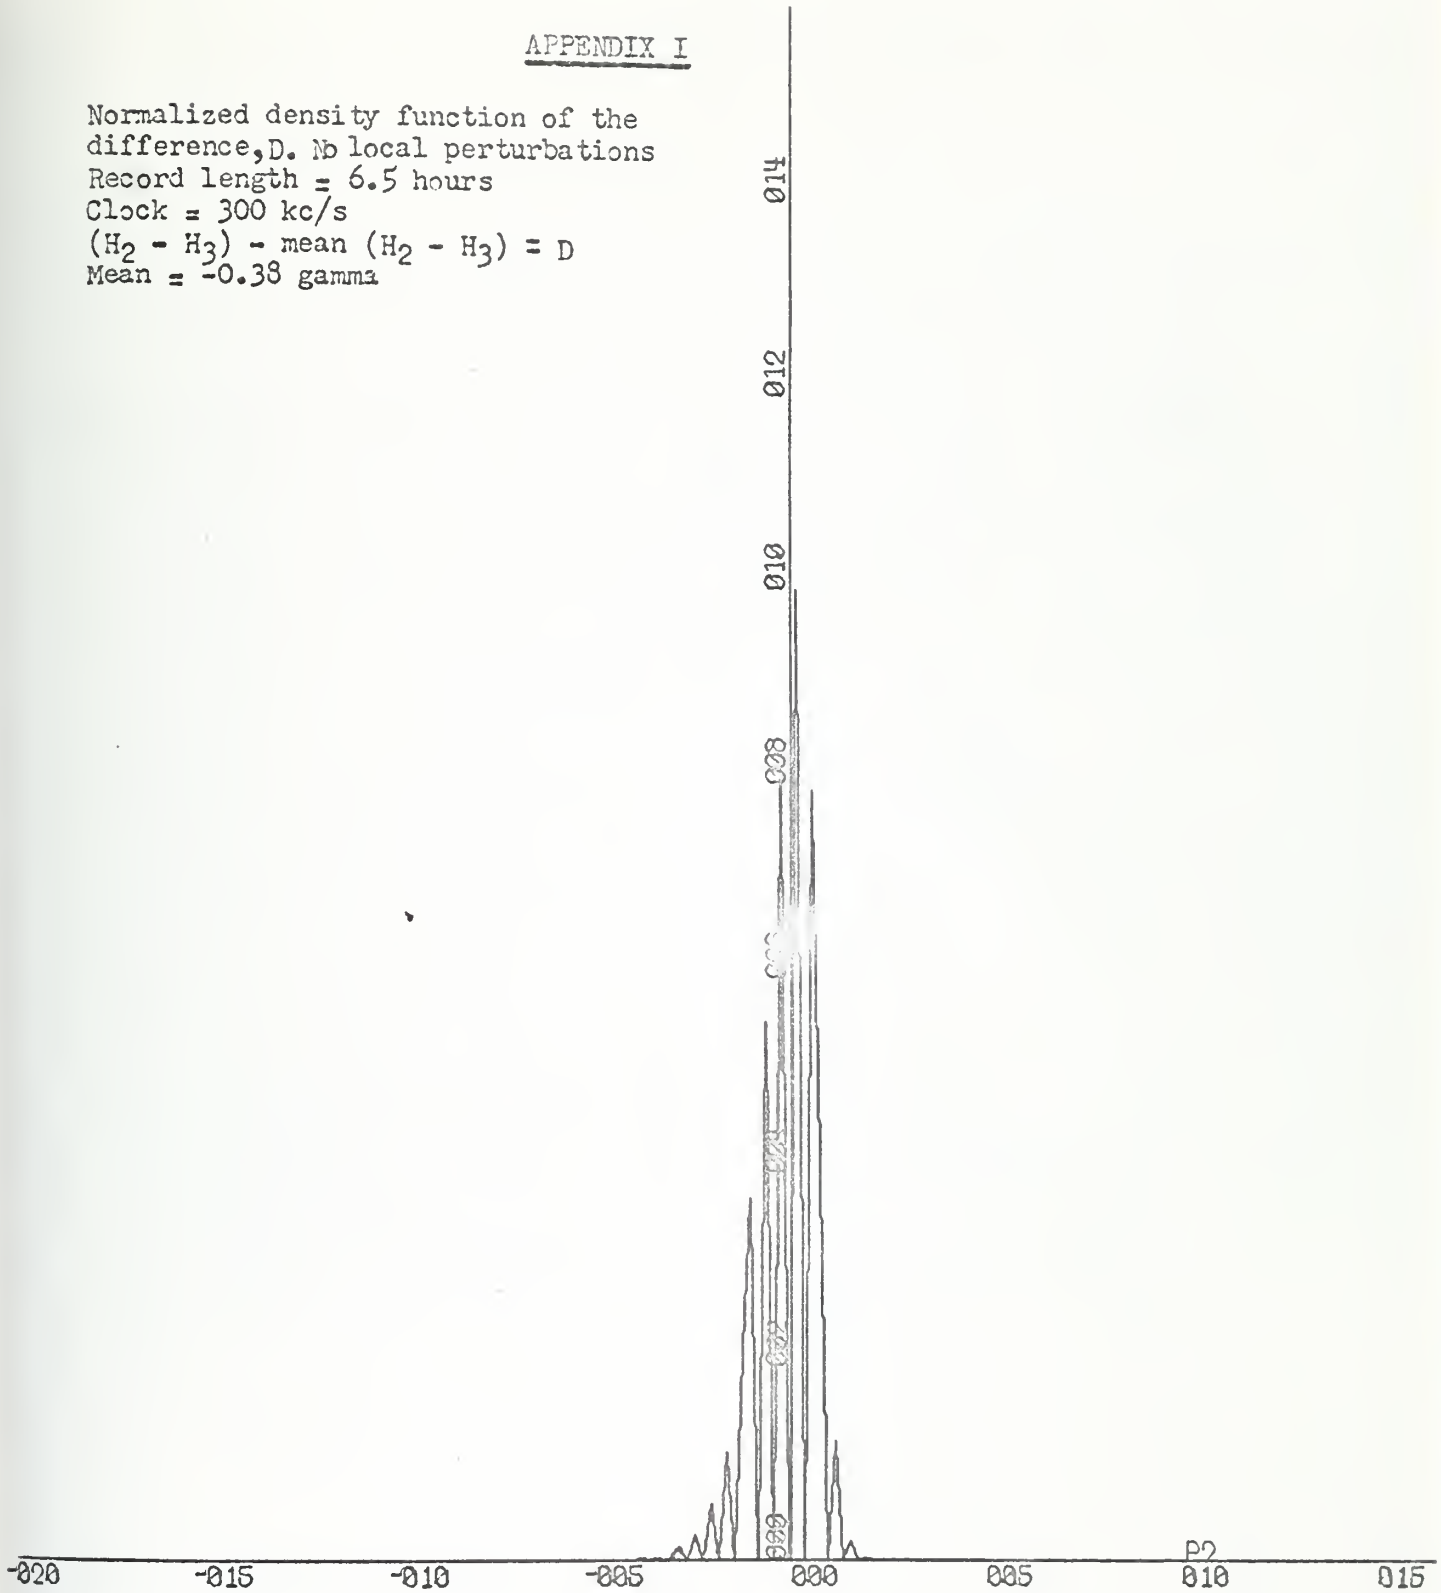

-SCALE = 5.00E+00 UNITS/INCH.
Y-SCALE = 2.00E-01 UNITS/INCH.

ANDERSON BOX 263
DENSITY FUNCTION X IN GAMMA Y IN FREQ

APPENDIX I

Normalized density function of the difference, D. No local perturbations
Record length = 6.5 hours
Clock = 300 kc/s
$(H_1 - H_3)$ - mean $(H_1 - H_3) = D$
Mean = 3.70 gamma

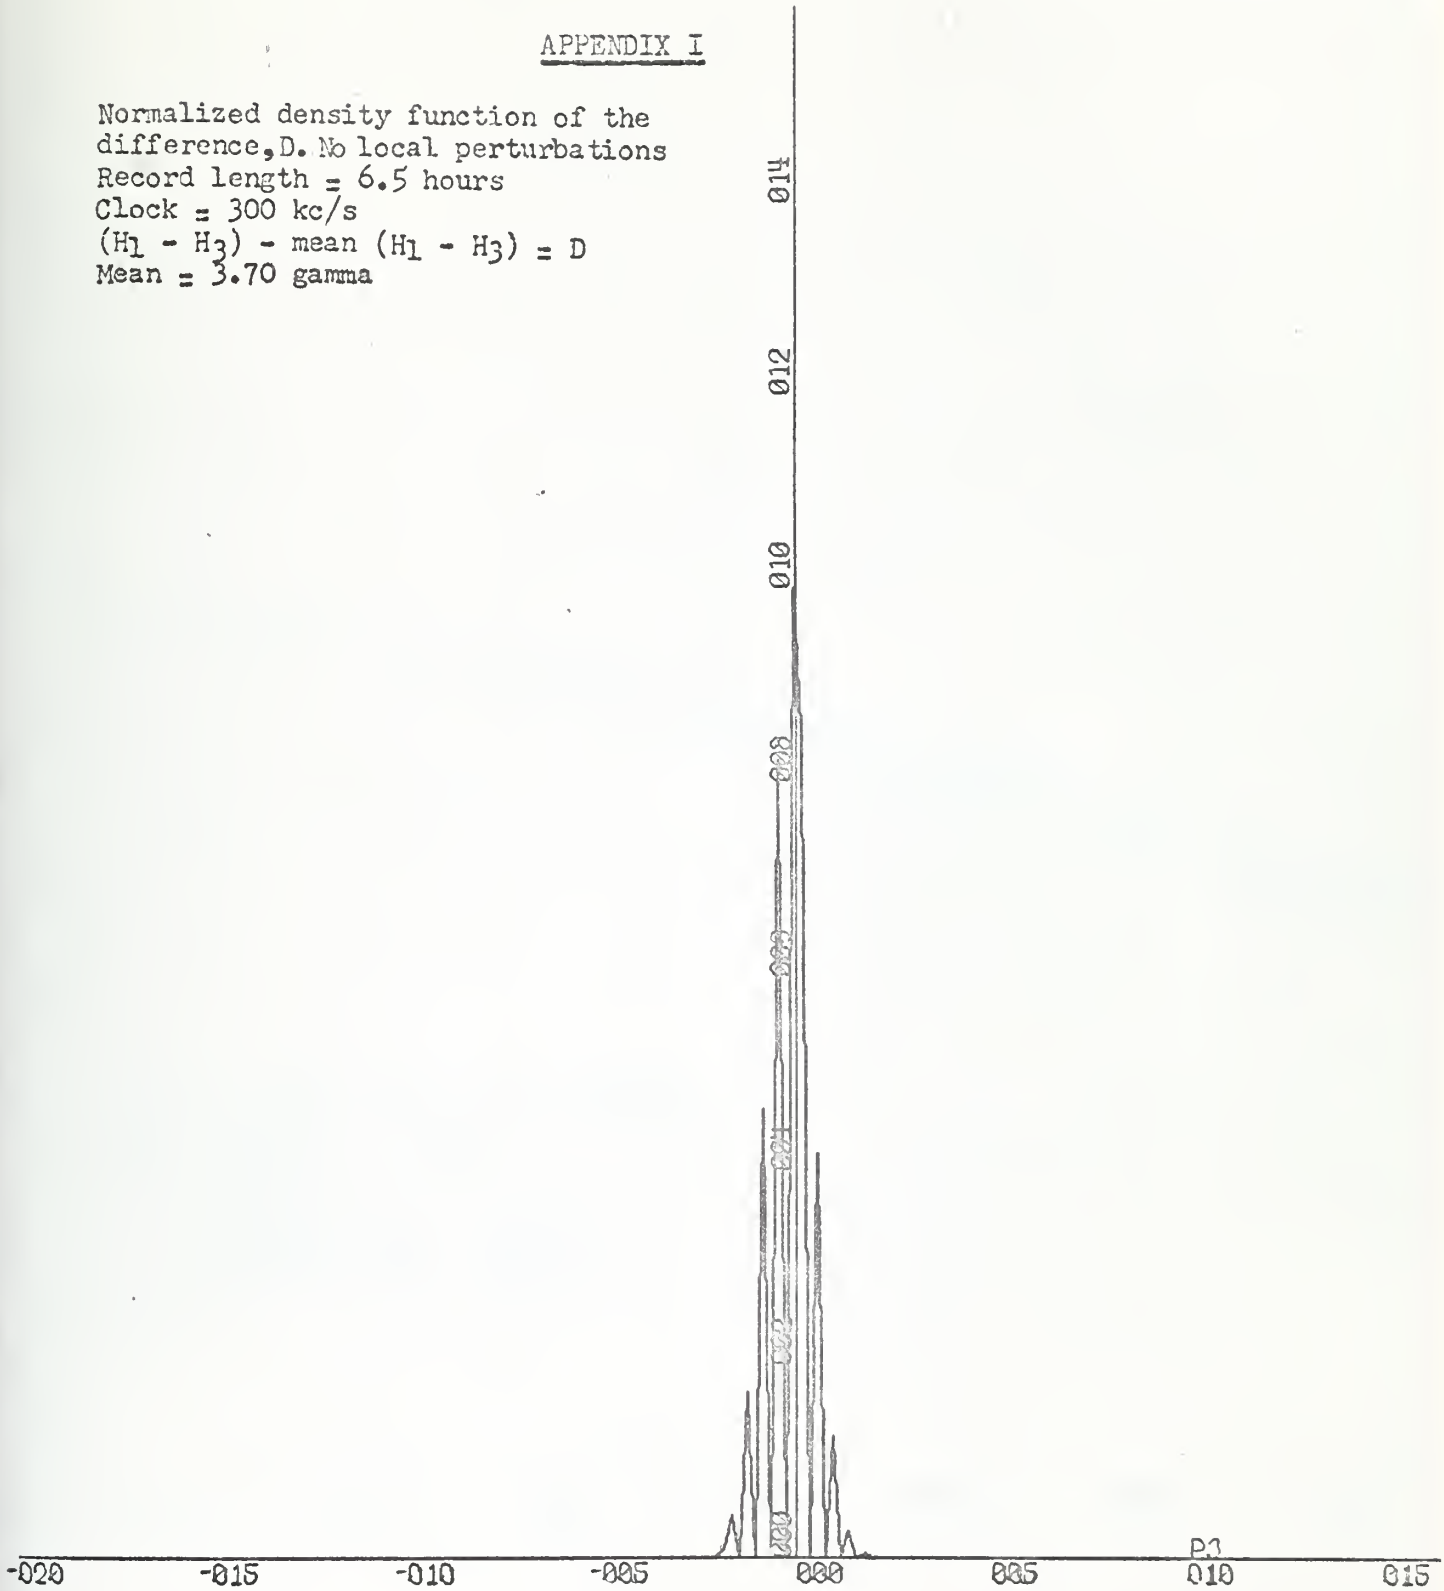

X-SCALE = 5.00E+00 UNITS/INCH.
Y-SCALE = 2.00E-01 UNITS/INCH.

ANDERSON BOX 263
DENSITY FUNCTION X IN GAMMA Y IN FREQ

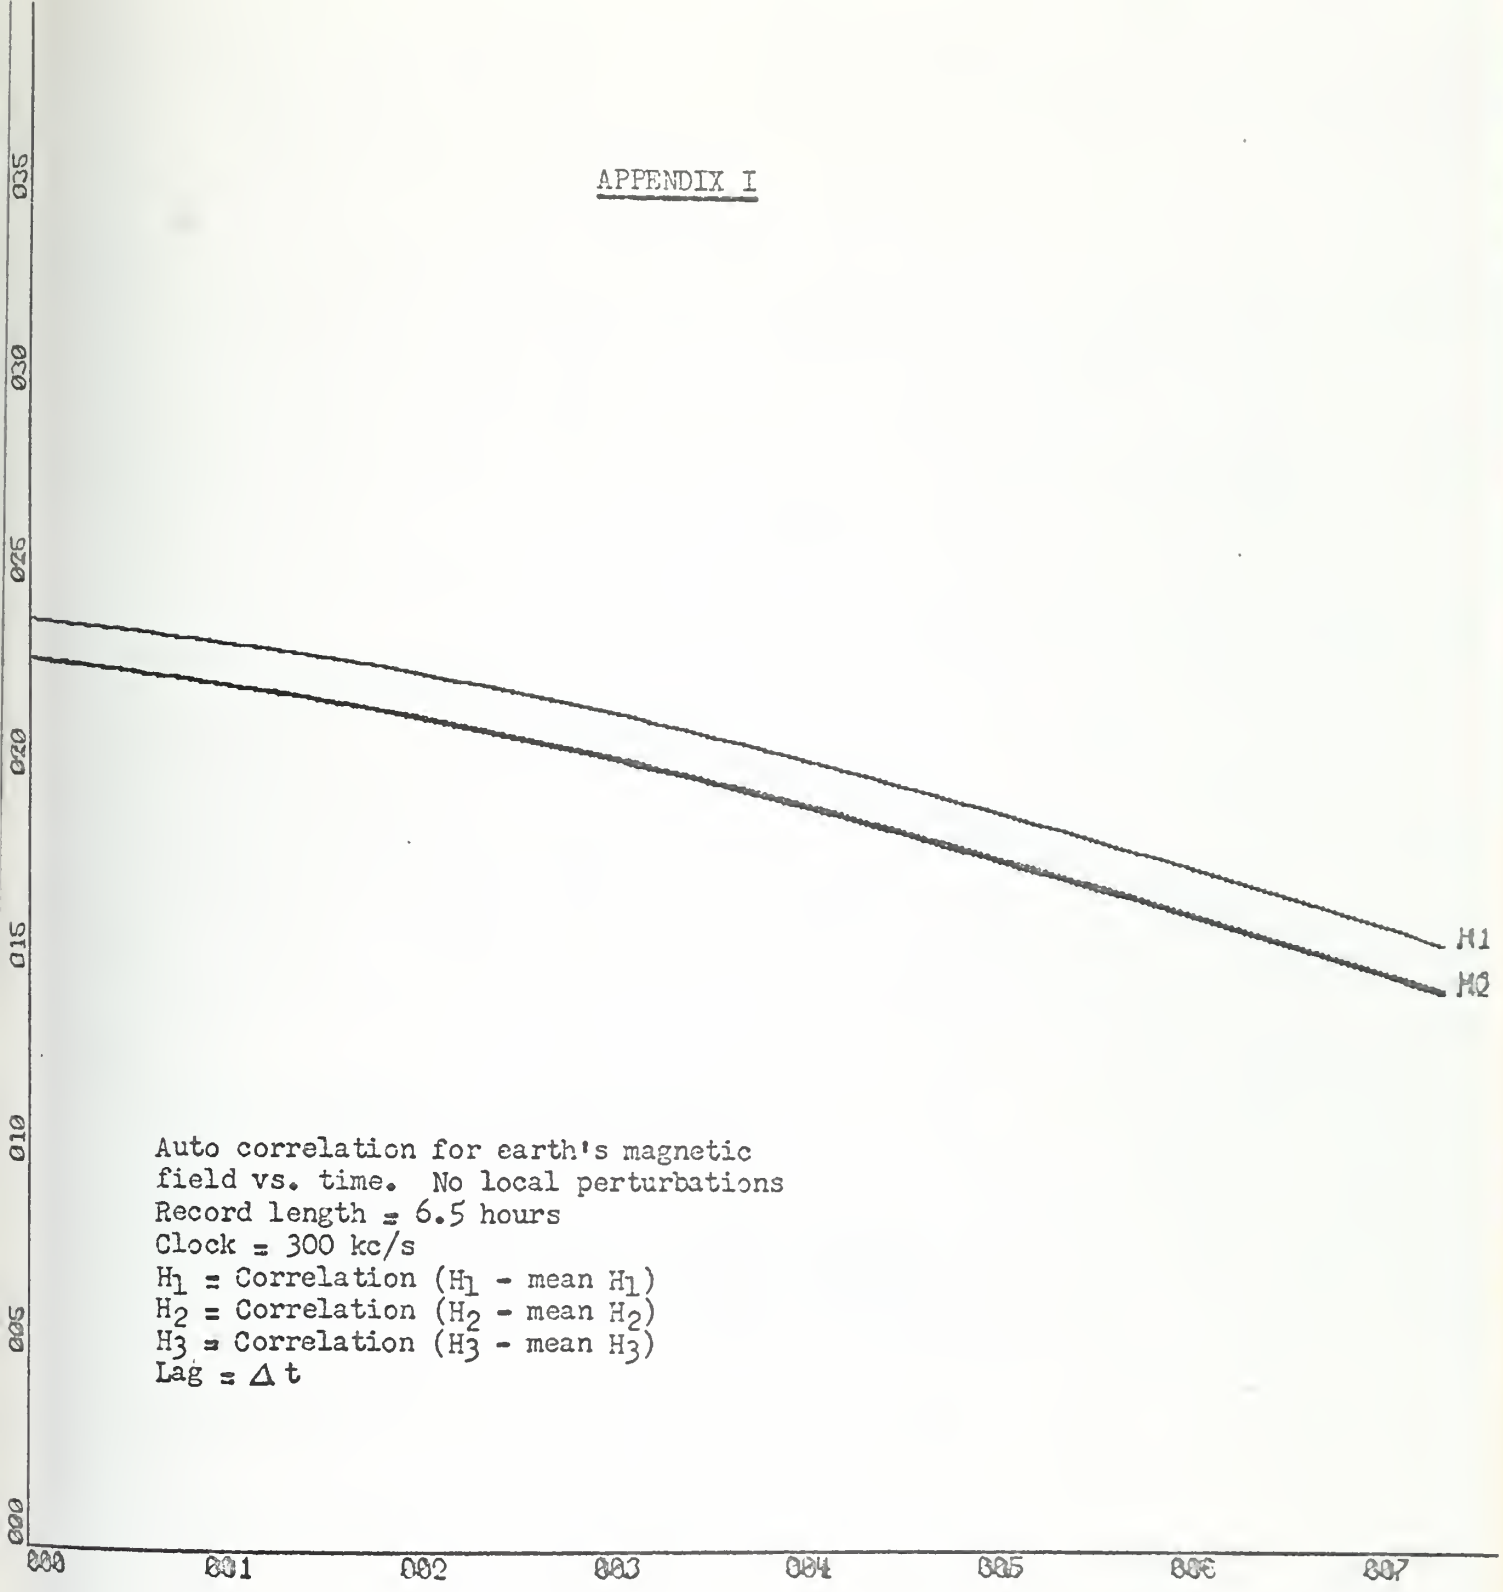

Auto correlation for earth's magnetic
field vs. time. No local perturbations
Record length = 6.5 hours
Clock = 300 kc/s
H_1 = Correlation (H_1 - mean H_1)
H_2 = Correlation (H_2 - mean H_2)
H_3 = Correlation (H_3 - mean H_3)
Lag = Δt

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 5.00E+01 UNITS/INCH.

ANDERSON BOX 263
AUTOCORRELATION FUNCTION Y IN PRODUCTS X IN LAGS

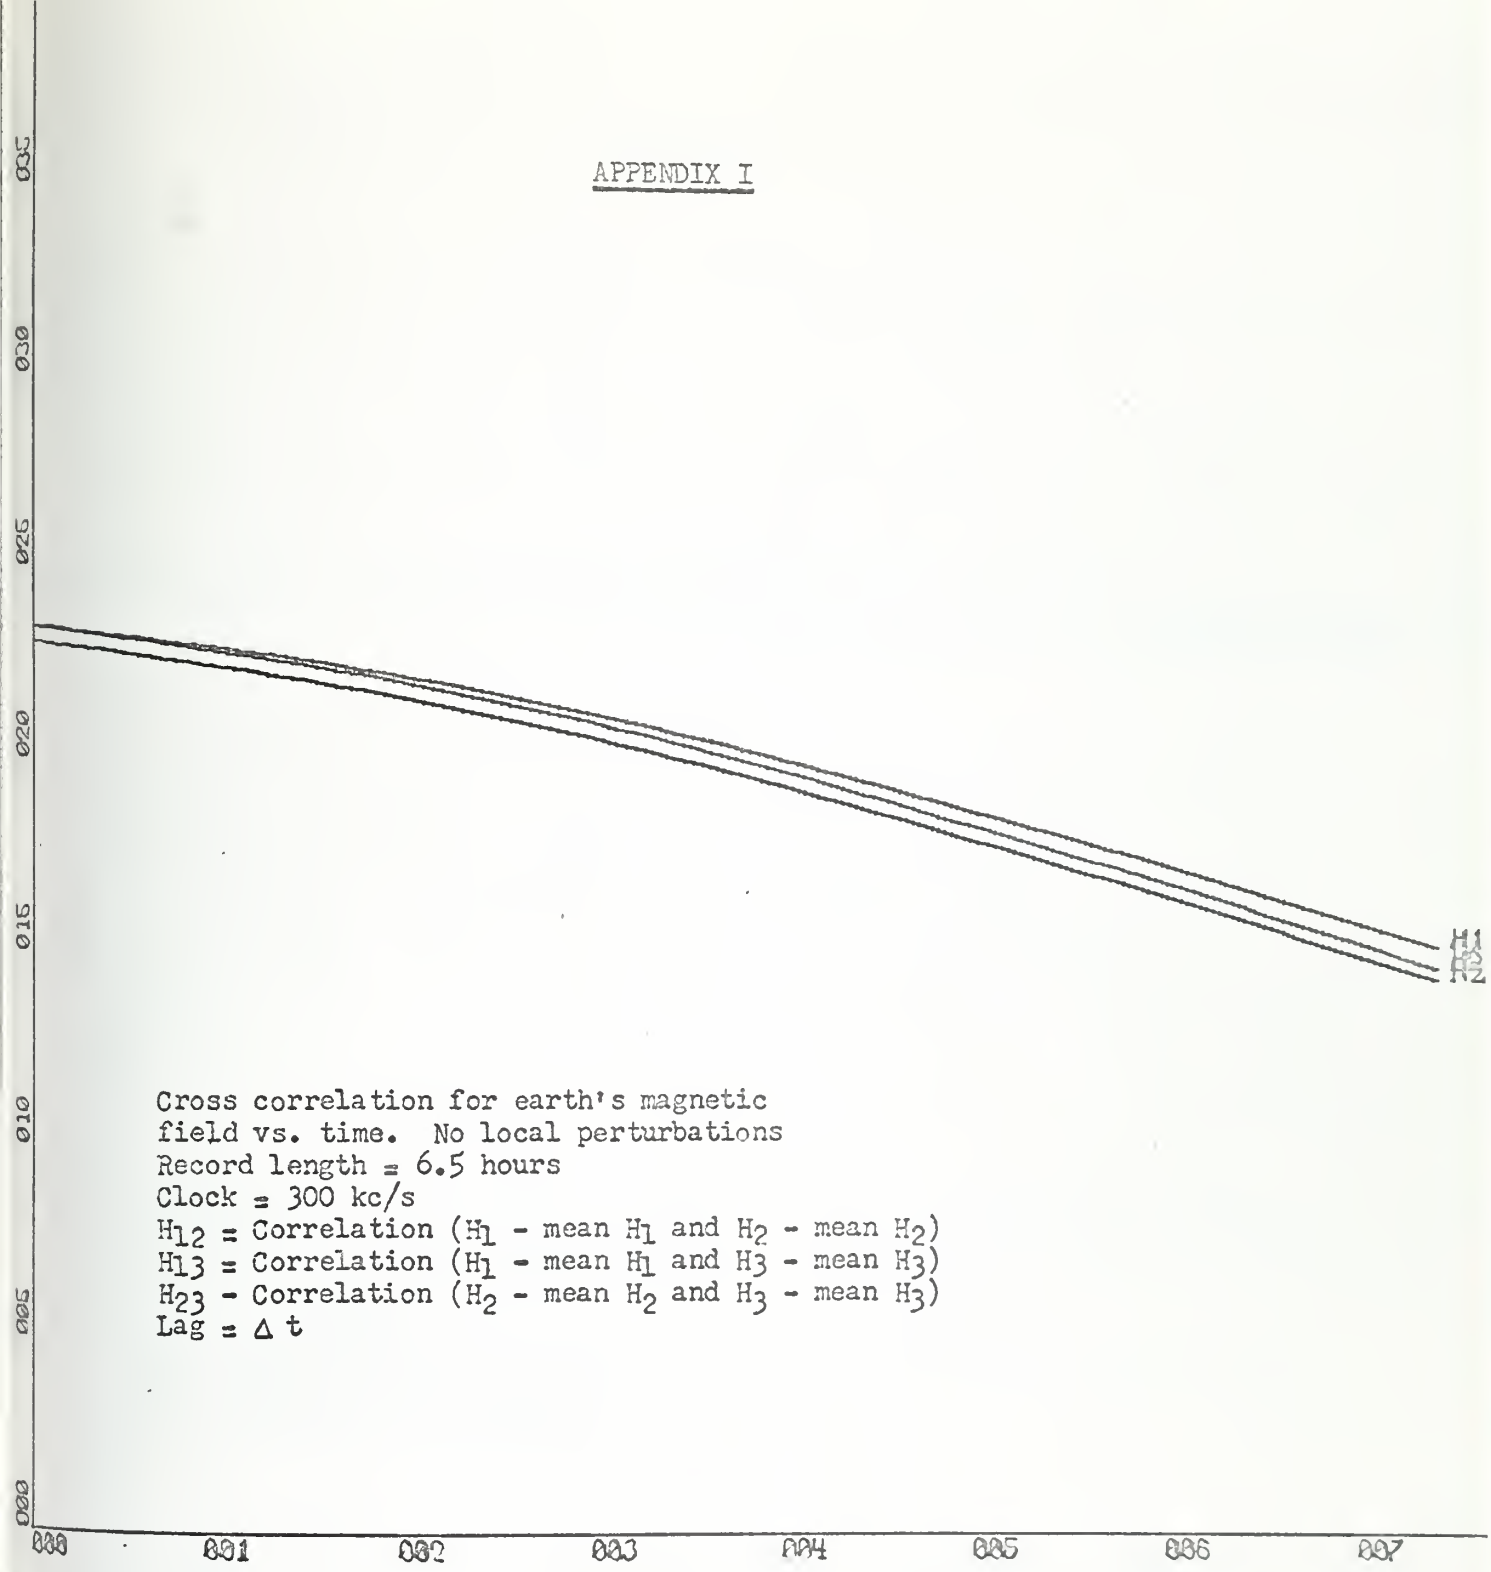

Cross correlation for earth's magnetic
field vs. time. No local perturbations
Record length = 6.5 hours
Clock = 300 kc/s
H_{12} = Correlation (H_1 - mean H_1 and H_2 - mean H_2)
H_{13} = Correlation (H_1 - mean H_1 and H_3 - mean H_3)
H_{23} - Correlation (H_2 - mean H_2 and H_3 - mean H_3)
Lag = Δ t

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 5.00E+01 UNITS/INCH.

ANDERSON BOX 263
CROSCORRELATION FUNCTION Y IN PRODUCTS X IN LAGS

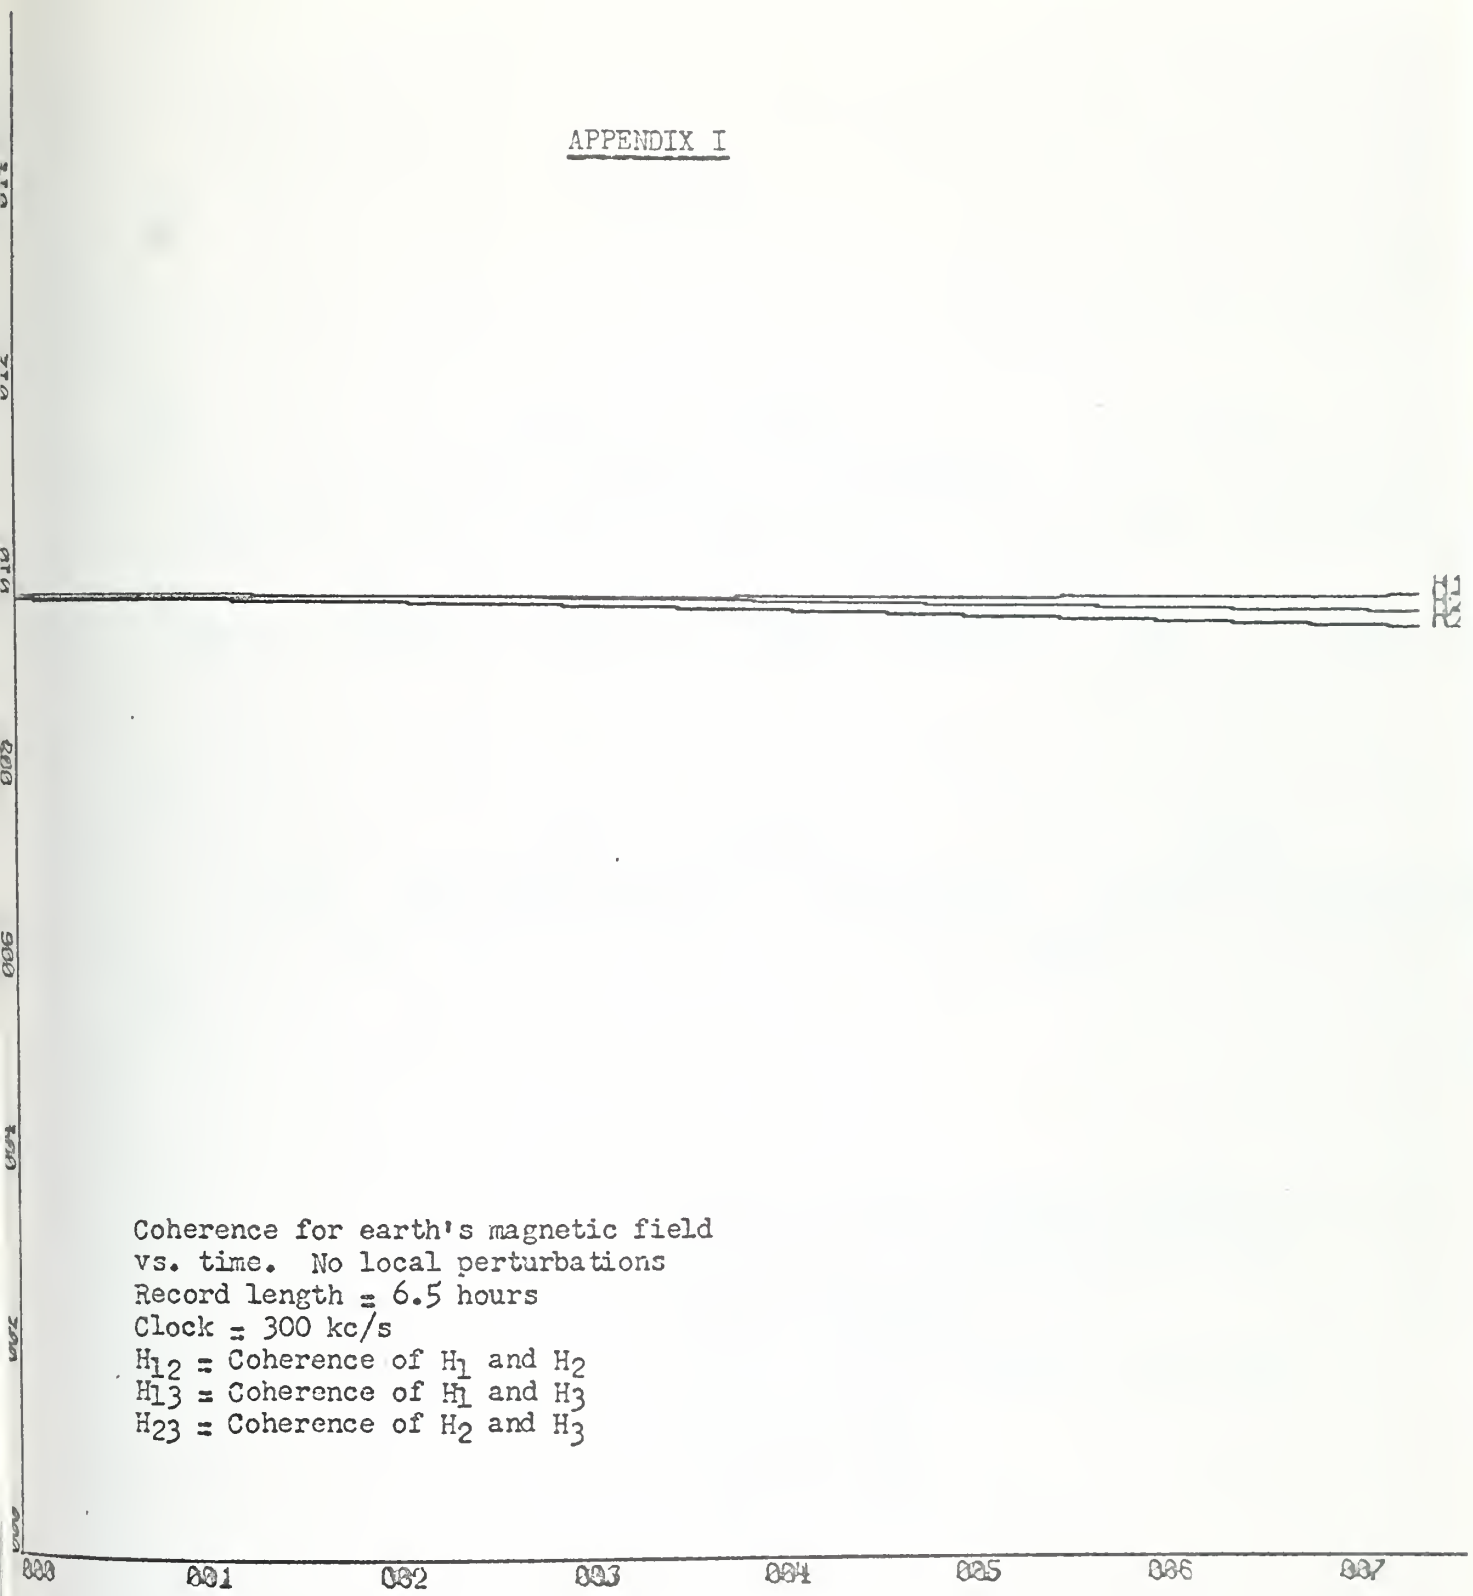

Coherence for earth's magnetic field
vs. time. No local perturbations
Record length = 6.5 hours
Clock = 300 kc/s
H_{12} = Coherence of H_1 and H_2
H_{13} = Coherence of H_1 and H_3
H_{23} = Coherence of H_2 and H_3

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 2.00E-01 UNITS/INCH.

ANDERSON BOX 263
COHERENCE FUNCTION Y IN COH X IN LAGS

APPENDIX I

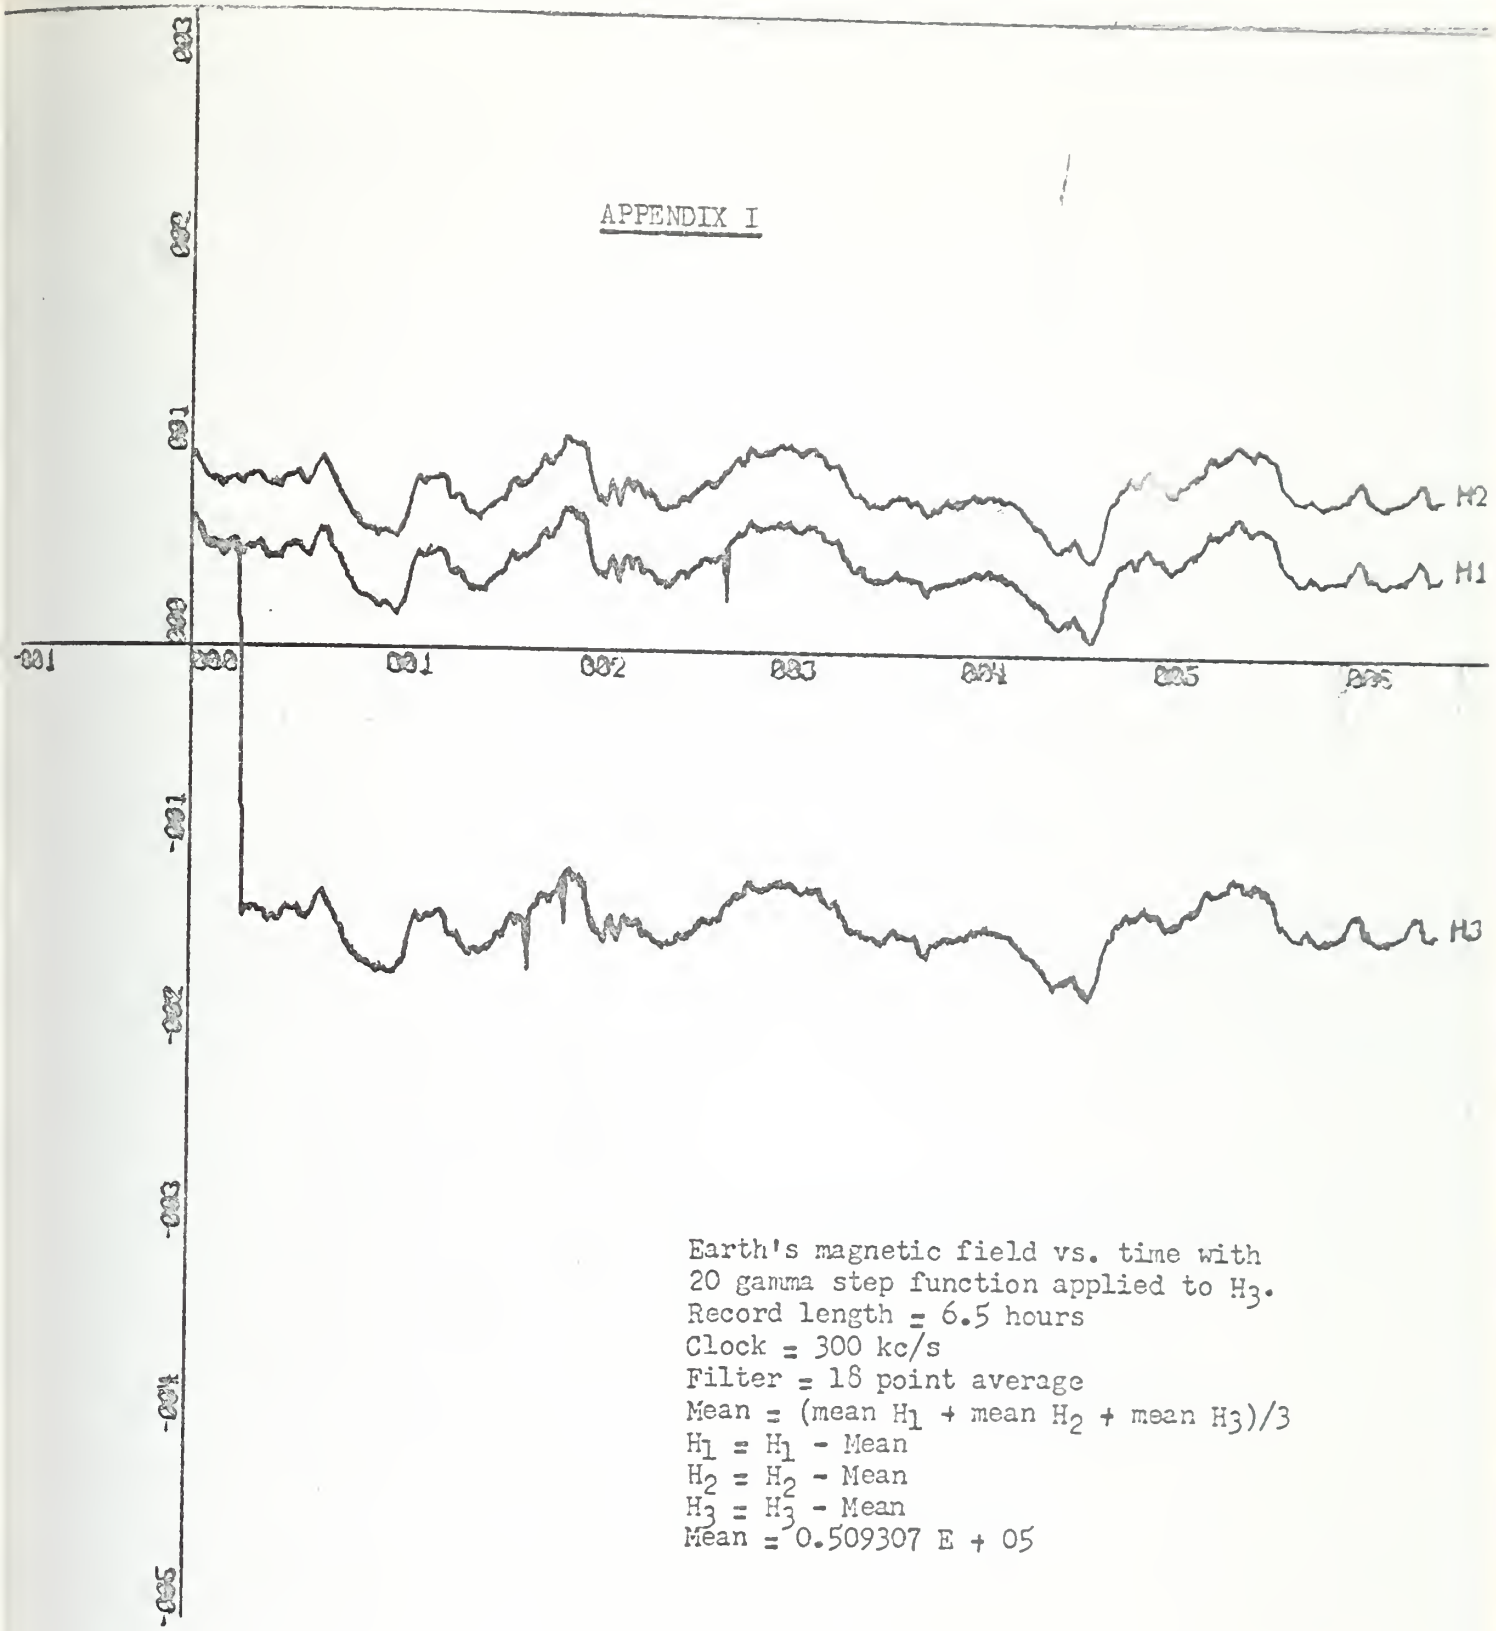

Earth's magnetic field vs. time with
20 gamma step function applied to H_3.
Record length = 6.5 hours
Clock = 300 kc/s
Filter = 18 point average
Mean = (mean H_1 + mean H_2 + mean H_3)/3
H_1 = H_1 - Mean
H_2 = H_2 - Mean
H_3 = H_3 - Mean
Mean = 0.509307 E + 05

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 1.00E+01 UNITS/INCH.
ANDERSON BOX 263
EARTHS MAGNETIC FIELD VS TIME T IN HRS H GAMMA

APPENDIX I

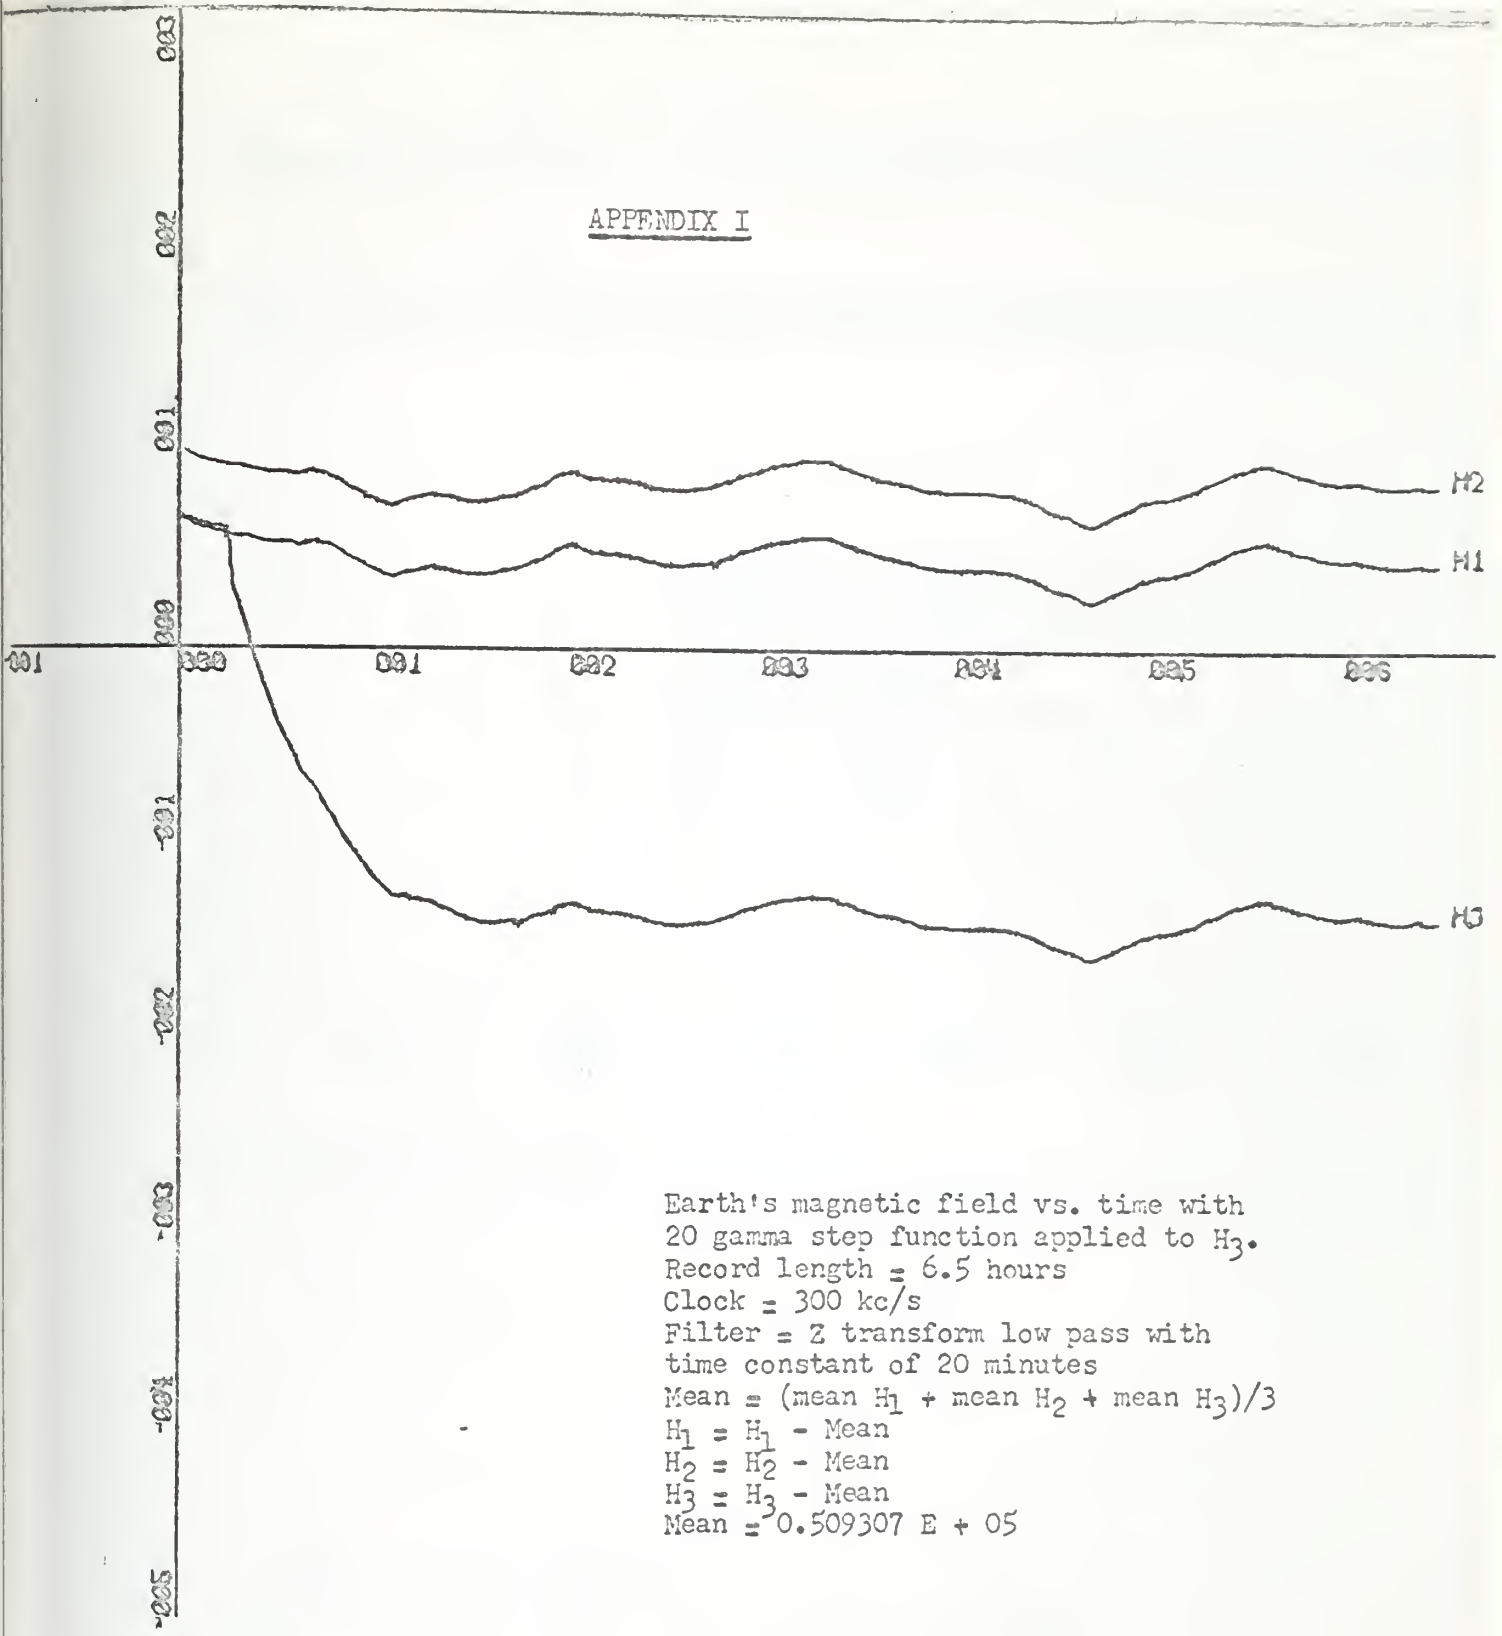

Earth's magnetic field vs. time with
20 gamma step function applied to H_3.
Record length = 6.5 hours
Clock = 300 kc/s
Filter = Z transform low pass with
time constant of 20 minutes
Mean = (mean H_1 + mean H_2 + mean H_3)/3
$H_1 = H_1$ - Mean
$H_2 = H_2$ - Mean
$H_3 = H_3$ - Mean
Mean = 0.509307 E + 05

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 1.00E+01 UNITS/INCH.
ANDERSON FILTER
EARTHS MAGNETIC FIELD VS TIME T IN HRS H GAMMA

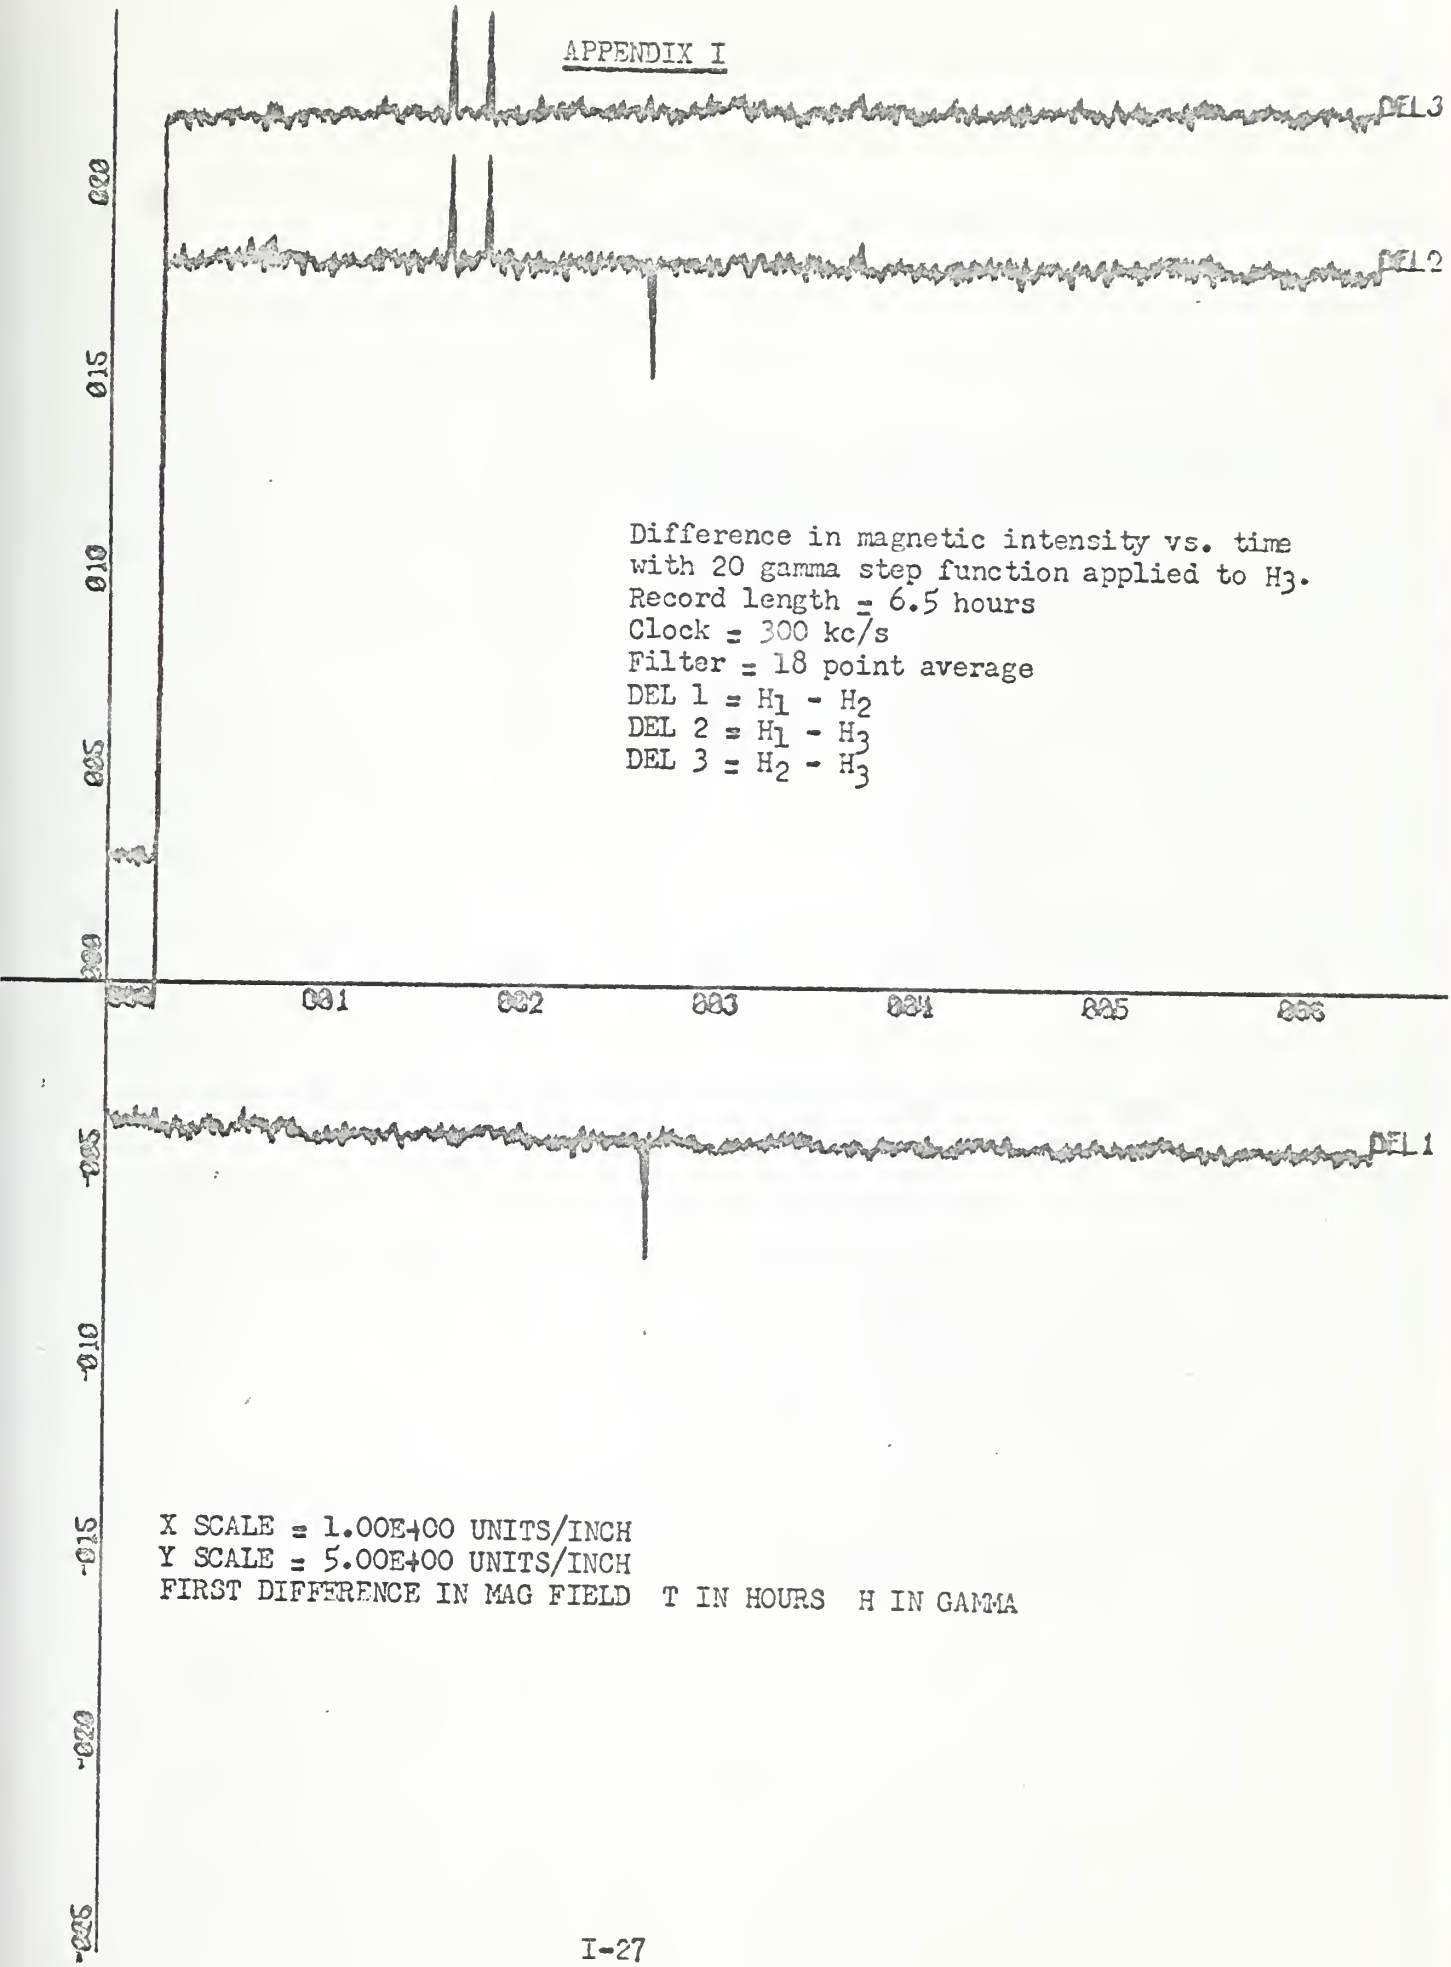

Difference in magnetic intensity vs. time
with 20 gamma step function applied to H_3.
Record length = 6.5 hours
Clock = 300 kc/s
Filter = 18 point average
DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$

X SCALE = 1.00E+00 UNITS/INCH
Y SCALE = 5.00E+00 UNITS/INCH
FIRST DIFFERENCE IN MAG FIELD T IN HOURS H IN GAMMA

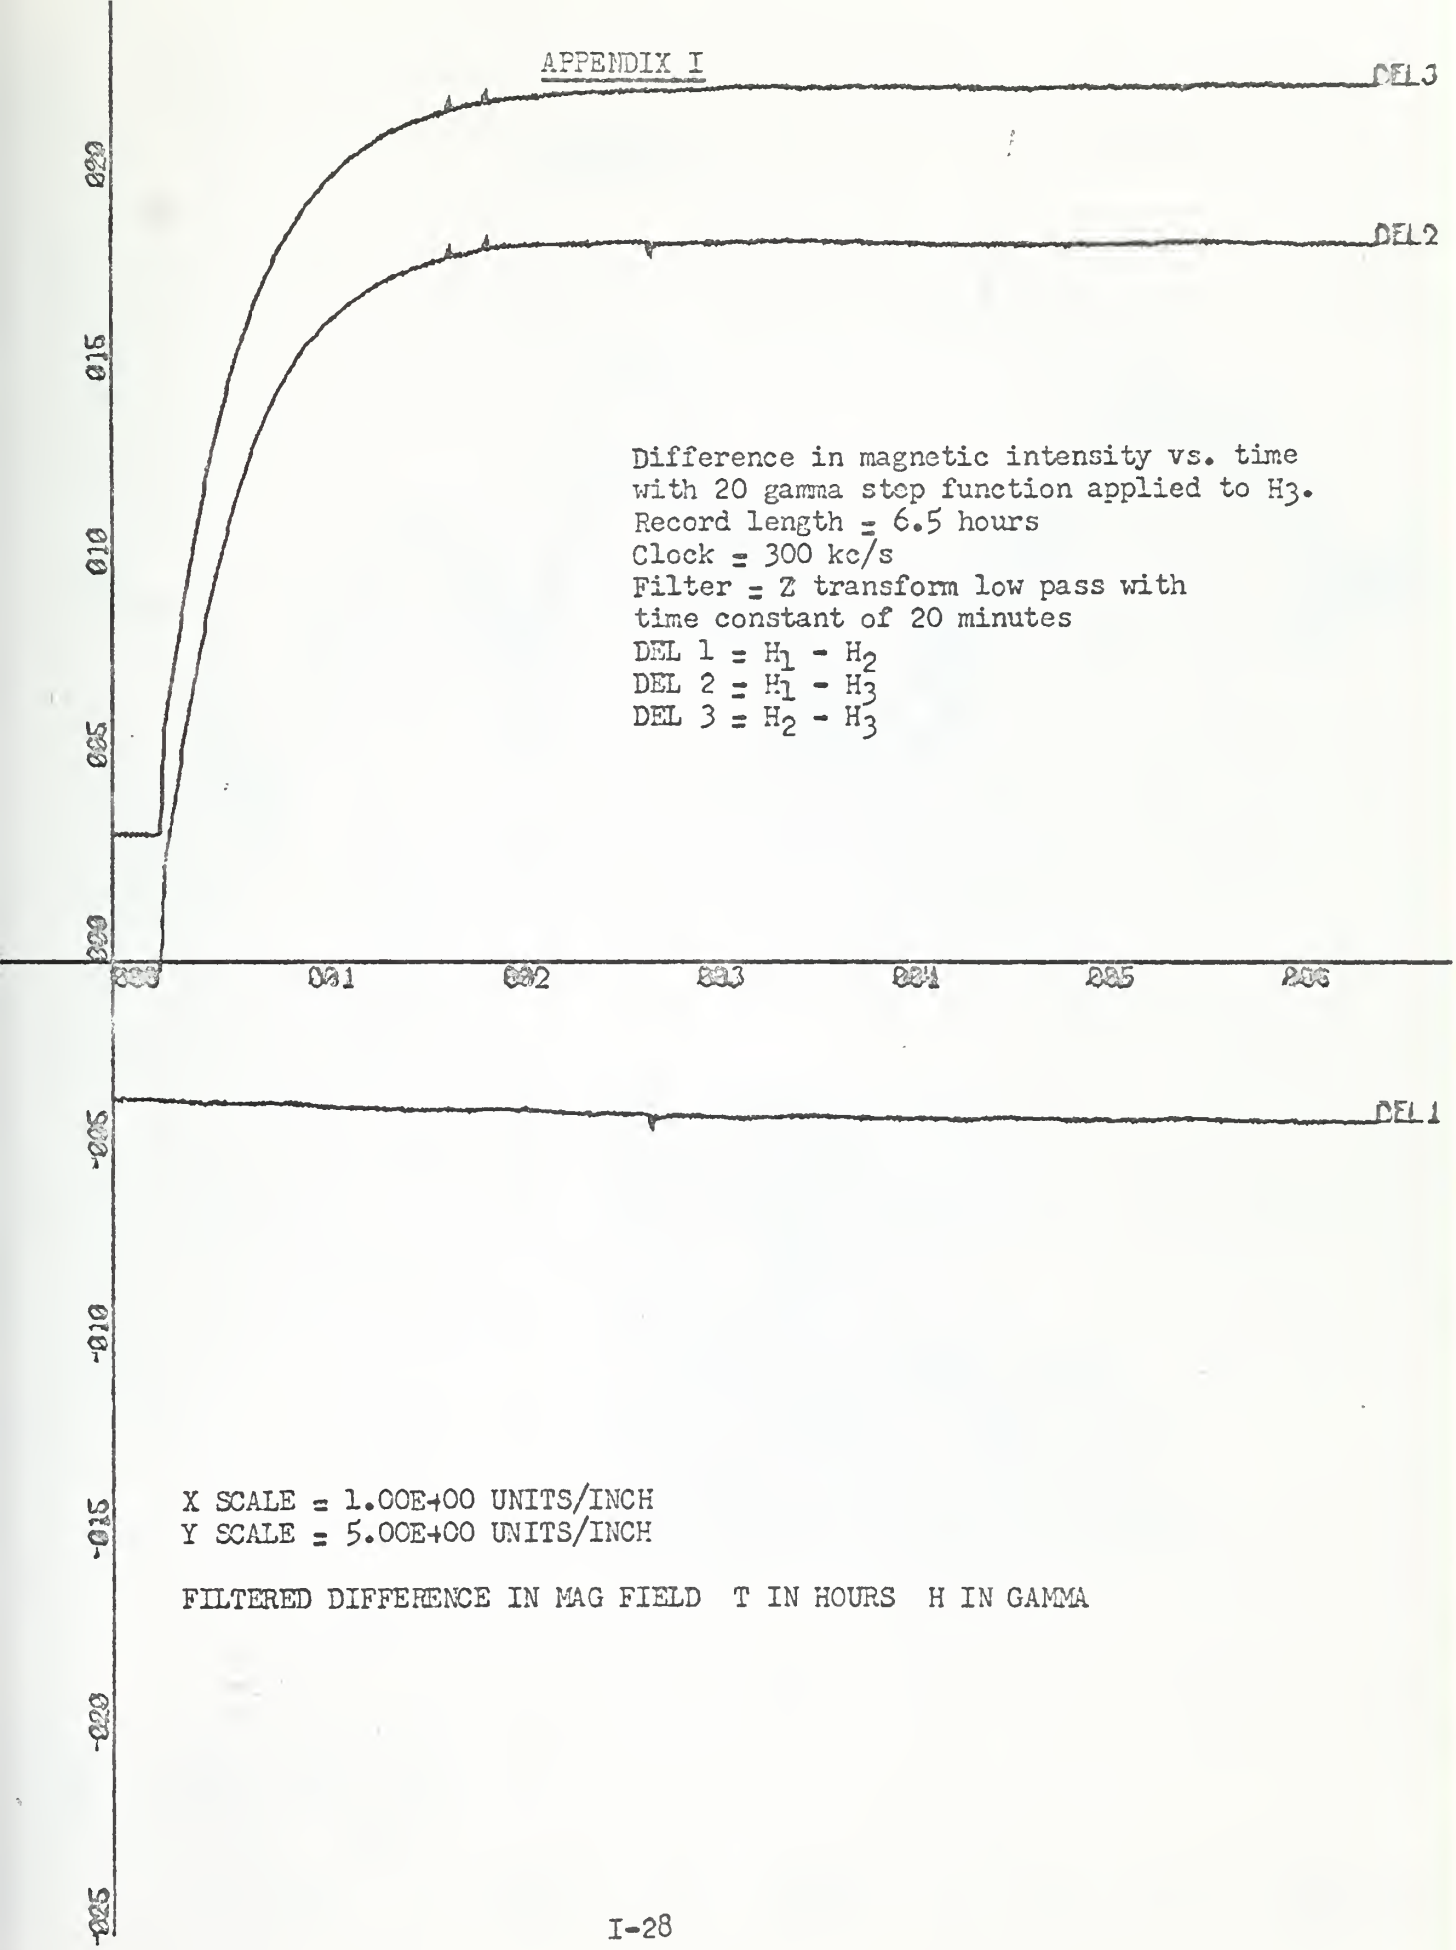

Difference in magnetic intensity vs. time
with 20 gamma step function applied to H_3.
Record length = 6.5 hours
Clock = 300 kc/s
Filter = Z transform low pass with
time constant of 20 minutes
DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$

X SCALE = 1.00E+00 UNITS/INCH
Y SCALE = 5.00E+00 UNITS/INCH

FILTERED DIFFERENCE IN MAG FIELD T IN HOURS H IN GAMMA

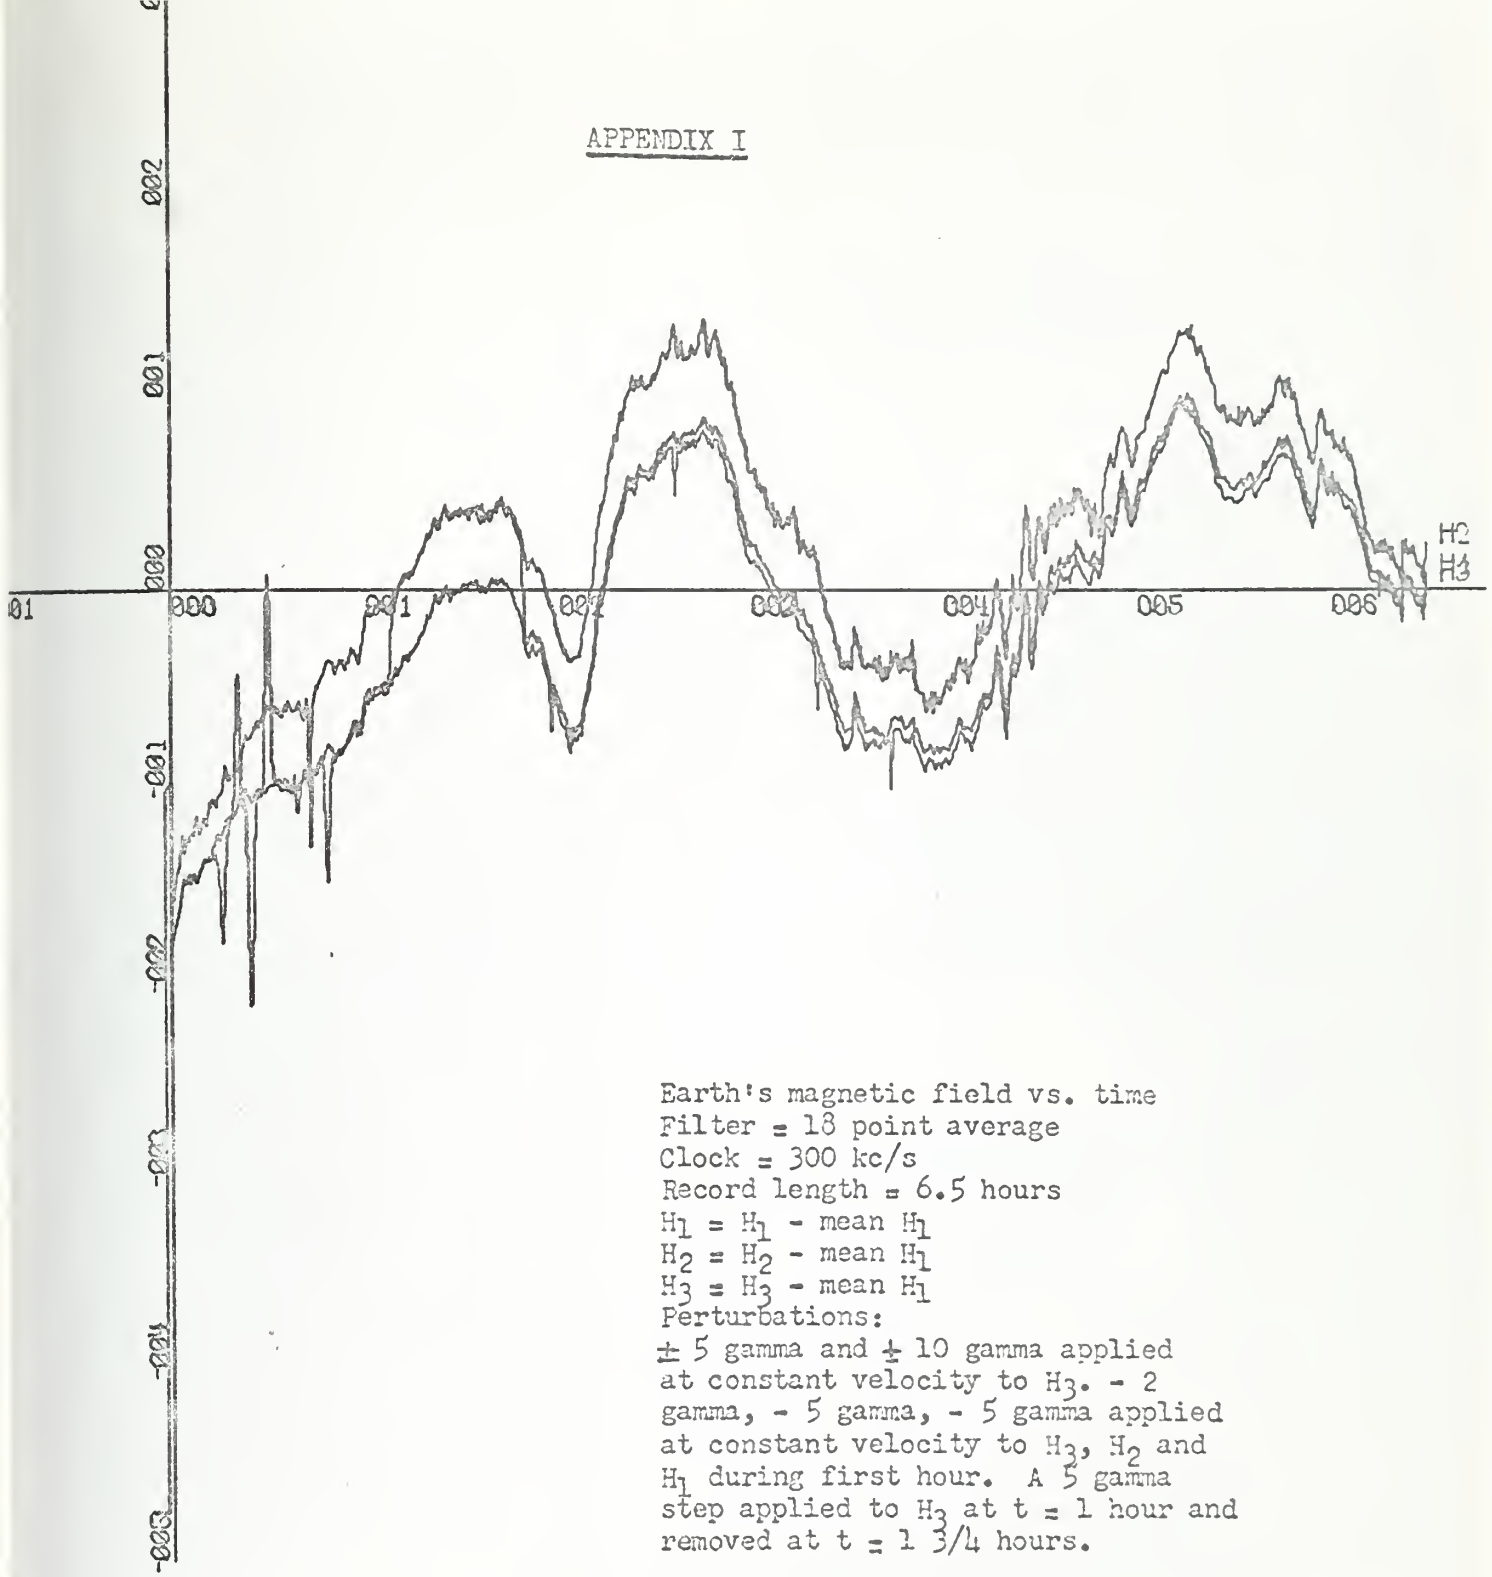

Earth's magnetic field vs. time
Filter = 18 point average
Clock = 300 kc/s
Record length = 6.5 hours
$H_1 = H_1$ - mean H_1
$H_2 = H_2$ - mean H_1
$H_3 = H_3$ - mean H_1
Perturbations:
$\pm$ 5 gamma and $\pm$ 10 gamma applied at constant velocity to H_3. - 2 gamma, - 5 gamma, - 5 gamma applied at constant velocity to H_3, H_2 and H_1 during first hour. A 5 gamma step applied to H_3 at t = 1 hour and removed at t = 1 3/4 hours.

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 1.00E+01 UNITS/INCH.
ANDERSON BOX 263
EARTHS MAGNETIC FIELD VS TIME T IN HRS H GAMMA

APPENDIX I

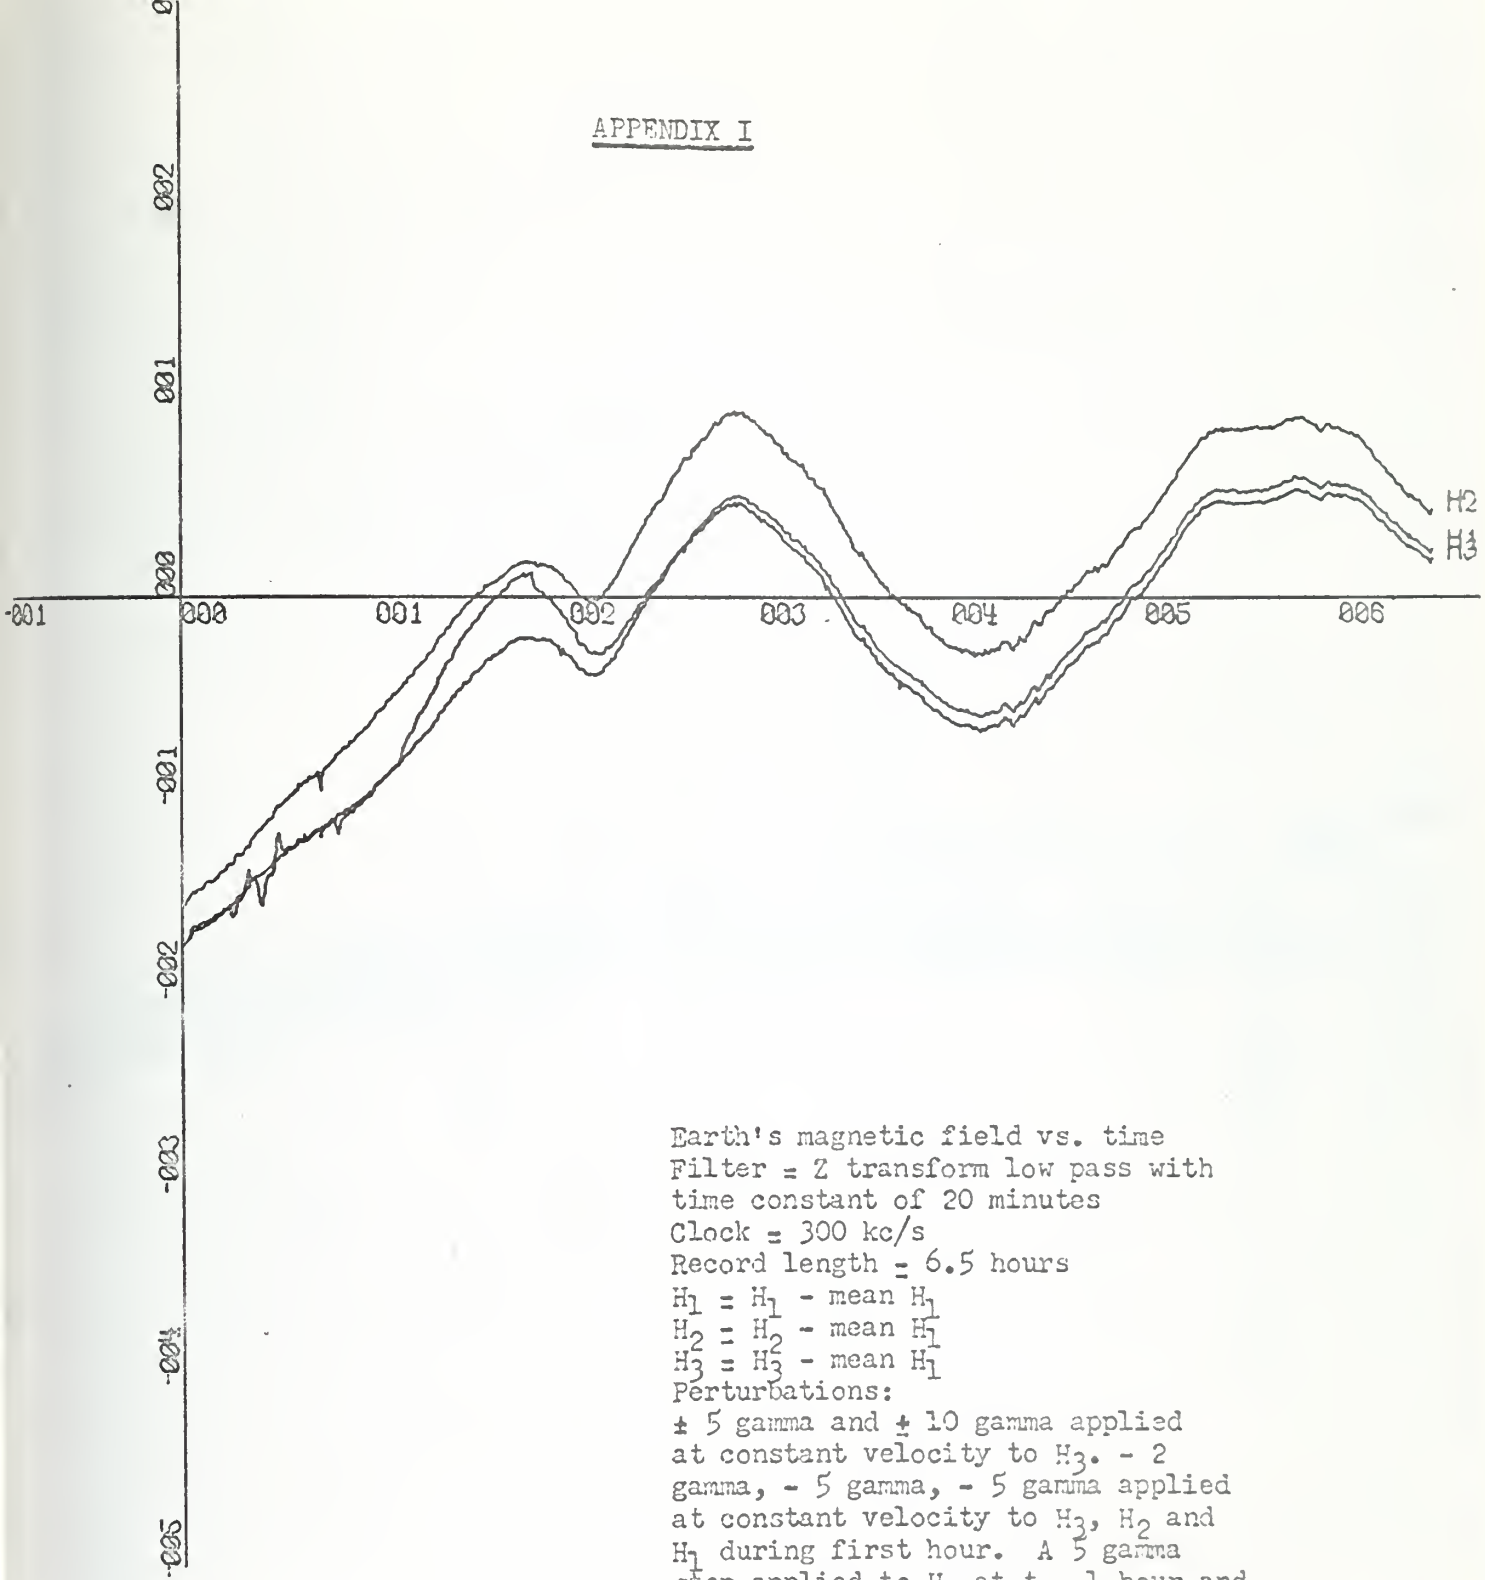

Earth's magnetic field vs. time
Filter = Z transform low pass with time constant of 20 minutes
Clock = 300 kc/s
Record length = 6.5 hours
$H_1 = H_1$ - mean H_1
$H_2 = H_2$ - mean H_1
$H_3 = H_3$ - mean H_1
Perturbations:
± 5 gamma and ± 10 gamma applied at constant velocity to H_3. - 2 gamma, - 5 gamma, - 5 gamma applied at constant velocity to H_3, H_2 and H_1 during first hour. A 5 gamma step applied to H_3 at t = 1 hour and removed at t = 1 3/4 hours.

X-SCALE = 1.00E+00 UNITS/INCH.
Y-SCALE = 1.00E+01 UNITS/INCH.
ANDERSON FILTER
EARTHS MAGNETIC FIELD VS TIME T IN HRS H GAMM

Earth's magnetic field vs. time
Filter = 2 point average
Clock = 300 kc/s
Record length = 1 hour
$H_1 = H_1$ - mean H_1
$H_2 = H_2$ - mean H_1
$H_3 = H_3$ - mean H_1
Perturbations:
$\pm$ 5 gamma and $\pm$ 10 gamma applied at constant velocity to H_3. -2 gamma, -5 gamma, -5 gamma applied at constant velocity to H_3, H_2 and H_1 during first hour. A 5 gamma step applied to H_3 at t = 1 hour and removed at t = 1 3/4 hours.

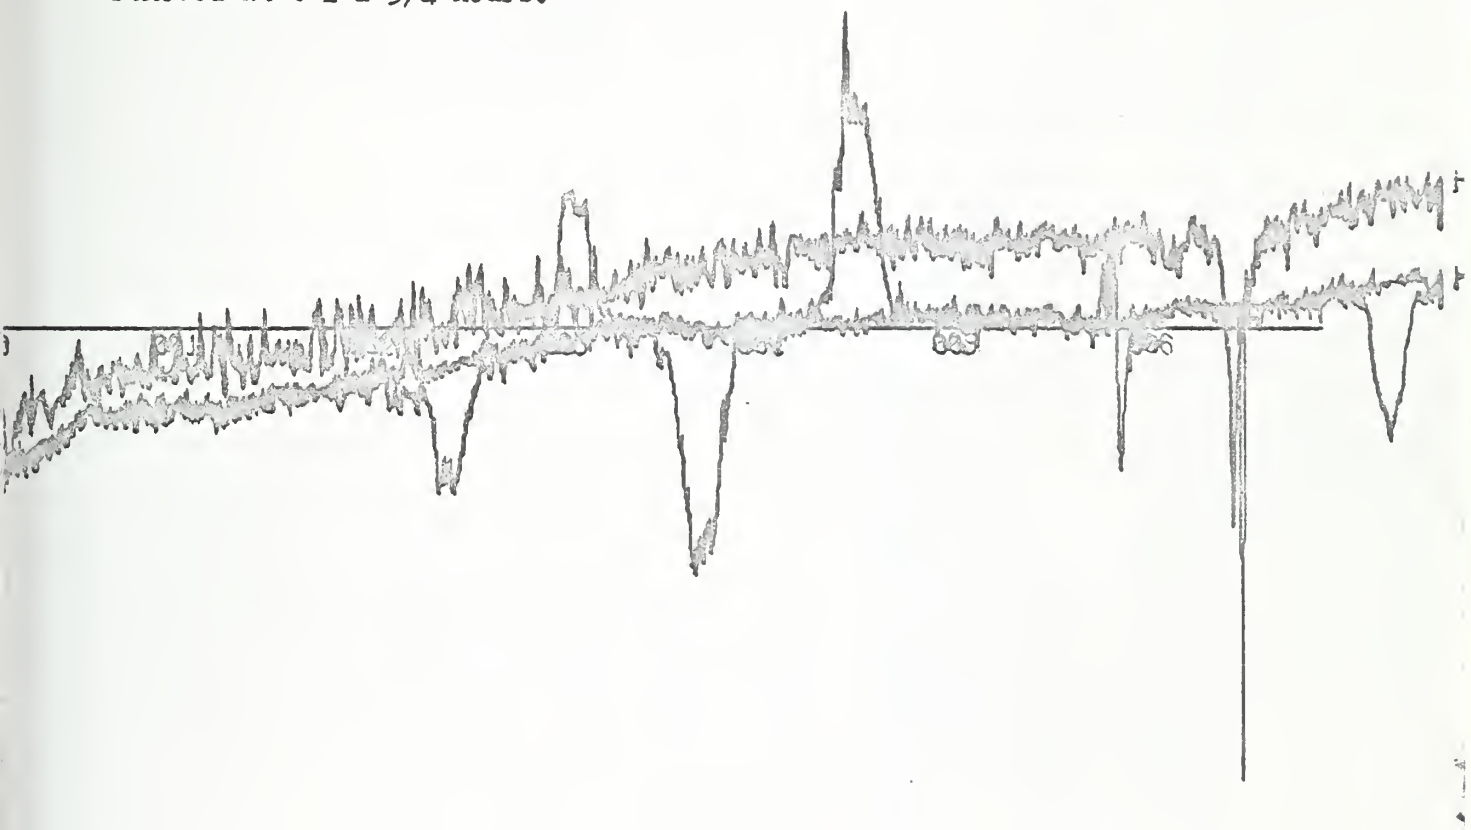

X SCALE = 1.00E+00 UNITS/INCH
Y SCALE = 1.00E+01 UNITS/INCH

EARTHS MAGNETIC FIELD VS TIME T IN MINUTES H IN GAMMA

APPENDIX I

Earth's magnetic field vs. time
Filter = Z transform low pass with time constant of 100 seconds.
Clock = 300 kc/s
Record length = 1 hour
$H_1 = H_1$ - mean H_1
$H_2 = H_2$ - mean H_1
$H_3 = H_3$ - mean H_1
Perturbations:
= 5 gamma and = 10 gamma applied at constant volocity to H_3. - 2 gamma, - 5 gamma, - 5 gamma applied at constant velocity to H_3, H_2 and H_1 during first hour. A 5 gamma step applied to H_3 at t = 1 hour and removed at t = 1 3/4 hours.

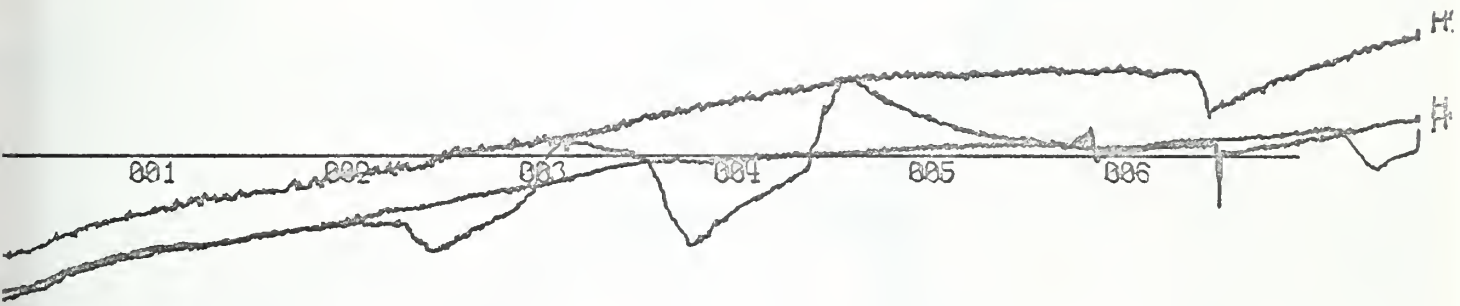

X SCALE = 1.00E-00 UNITS/INCH
Y SCALE = 1.00E-01 UNITS/INCH

EARTHS MAGNETIC FIELD VS TIME T IN MINUTES H IN GAMMA

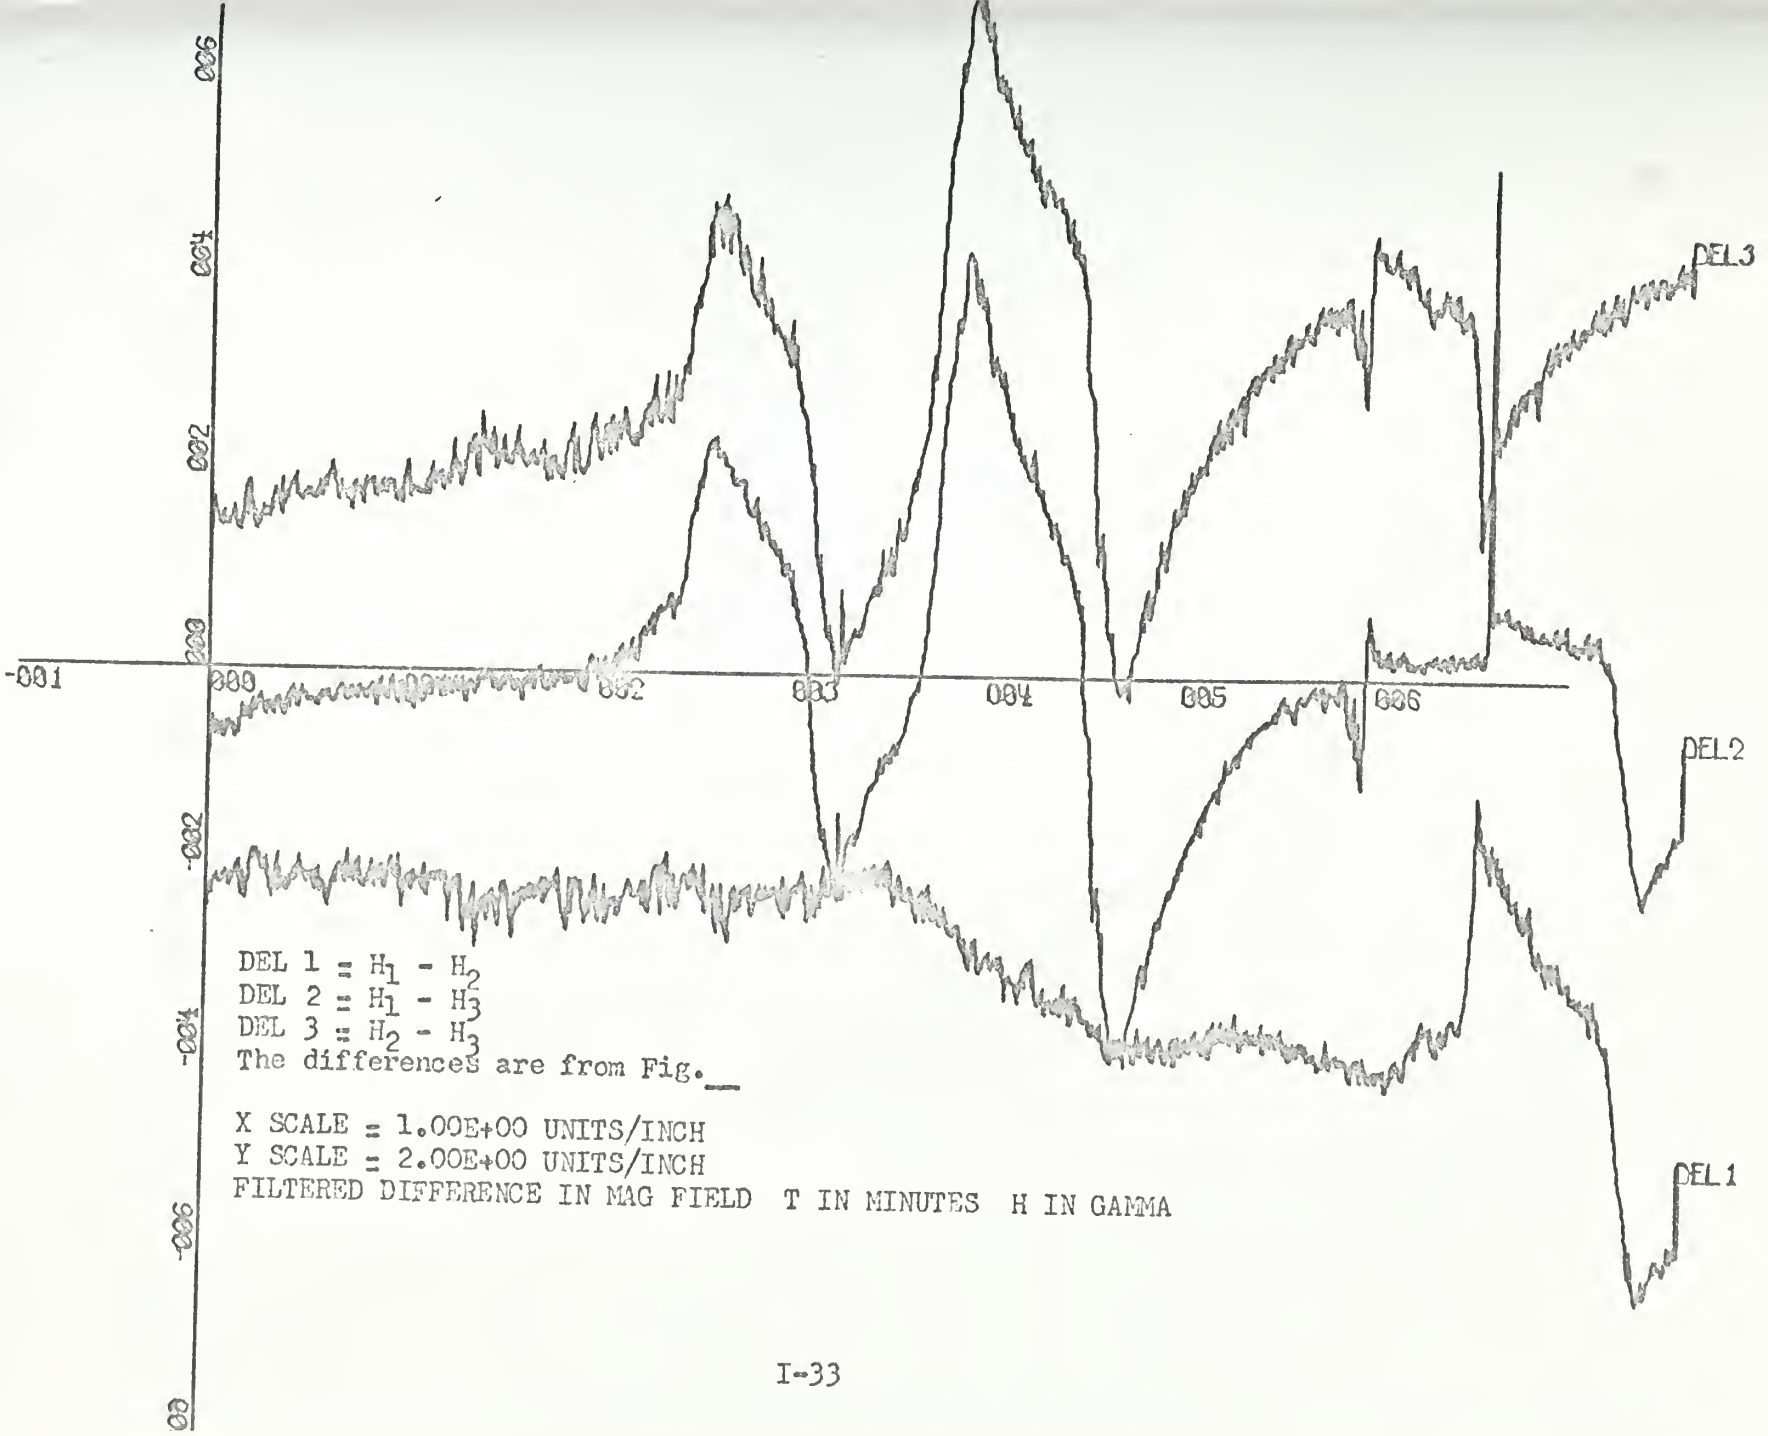

DEL 1 = $H_1 - H_2$
DEL 2 = $H_1 - H_3$
DEL 3 = $H_2 - H_3$
The differences are from Fig.__

X SCALE = 1.00E+00 UNITS/INCH
Y SCALE = 2.00E+00 UNITS/INCH
FILTERED DIFFERENCE IN MAG FIELD T IN MINUTES H IN GAMMA

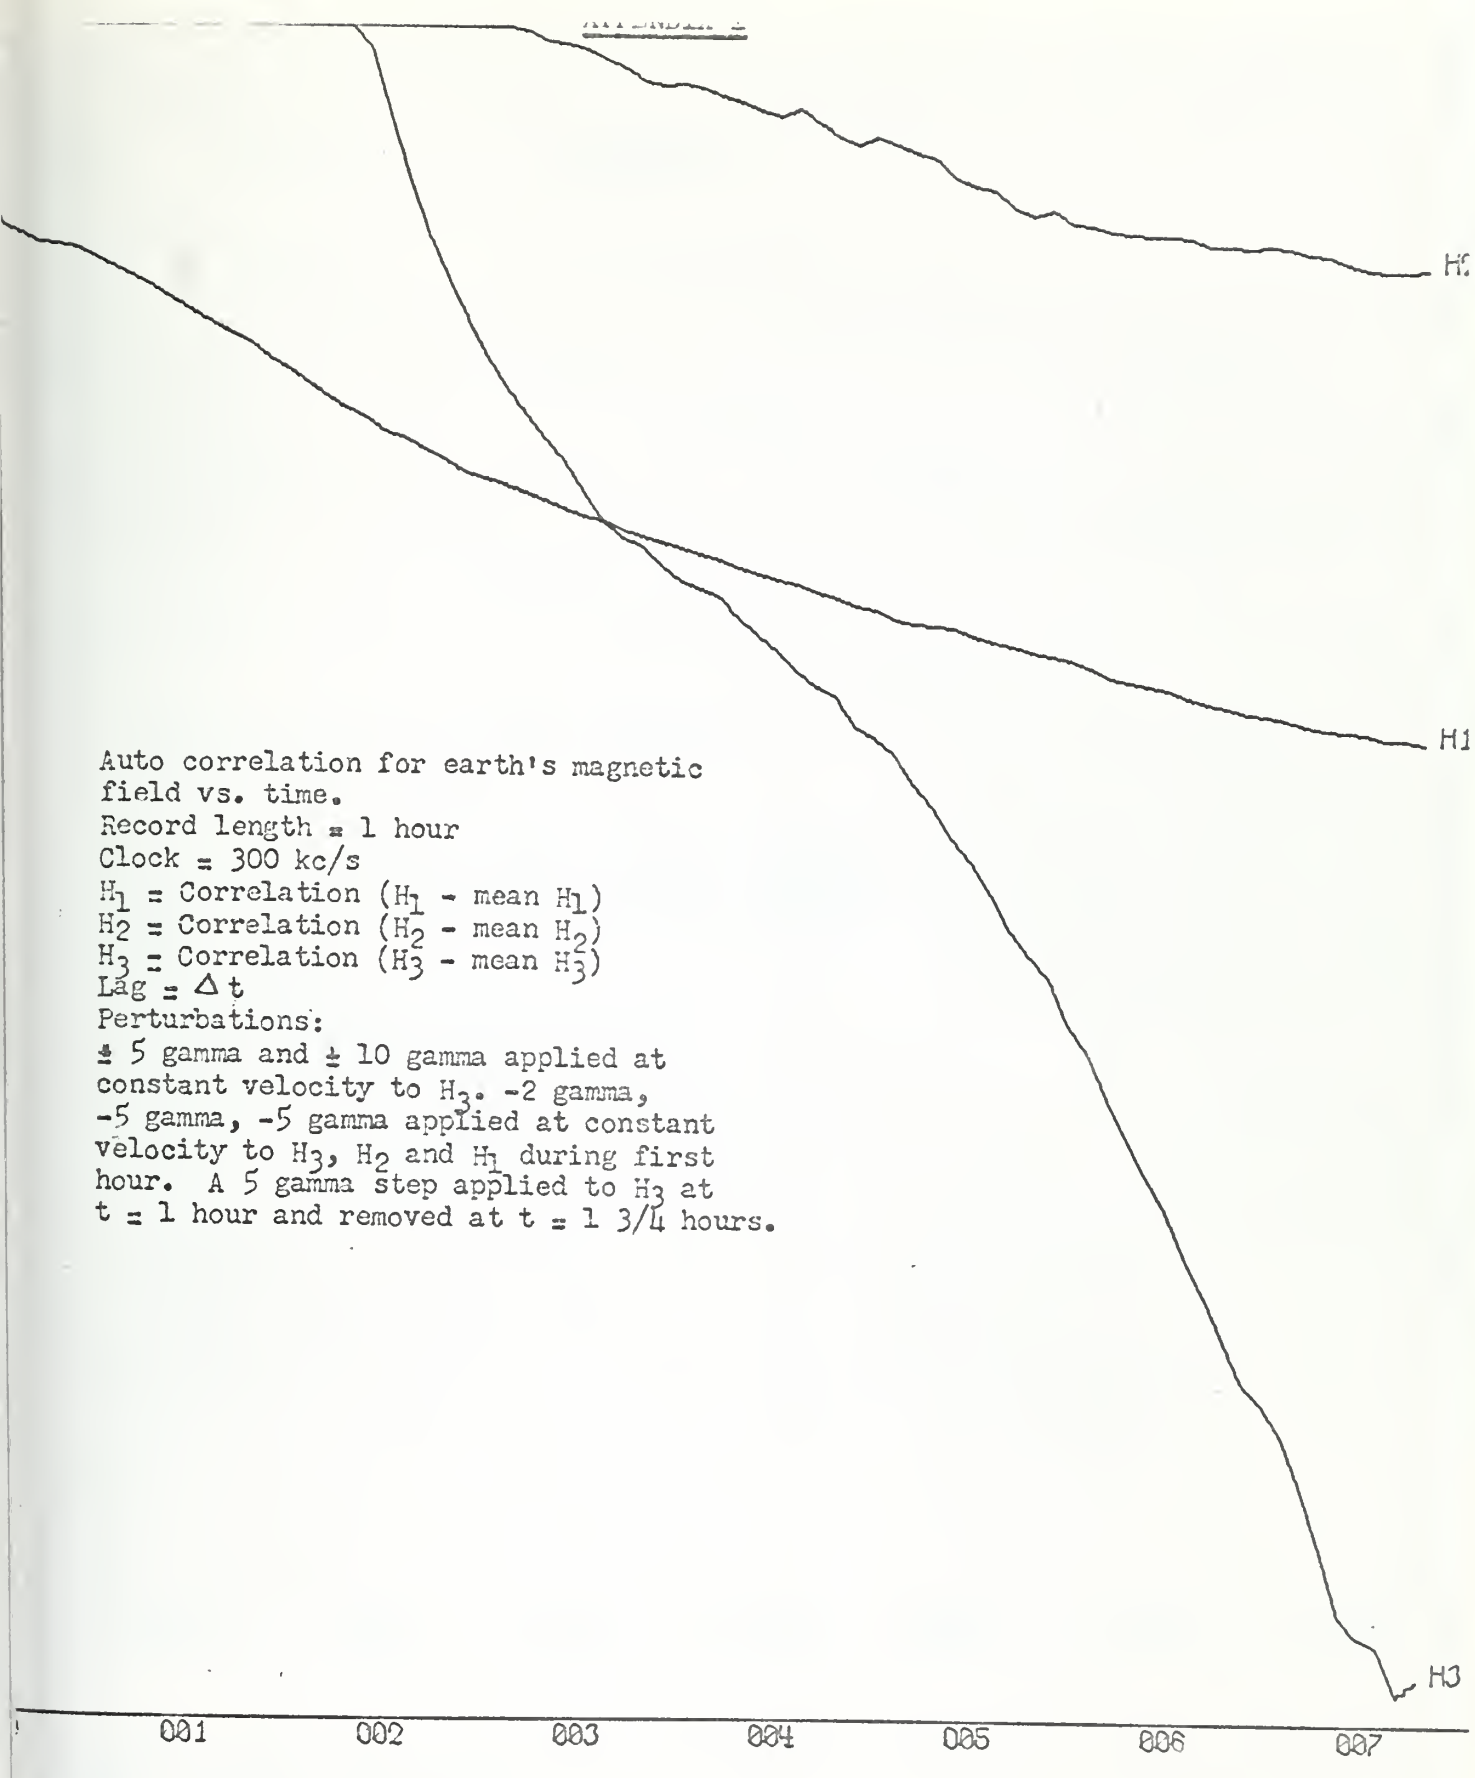

Auto correlation for earth's magnetic field vs. time.
Record length = 1 hour
Clock = 300 kc/s
H_1 = Correlation (H_1 - mean H_1)
H_2 = Correlation (H_2 - mean H_2)
H_3 = Correlation (H_3 - mean H_3)
Lag = Δt
Perturbations:
± 5 gamma and ± 10 gamma applied at constant velocity to H_3. -2 gamma, -5 gamma, -5 gamma applied at constant velocity to H_3, H_2 and H_1 during first hour. A 5 gamma step applied to H_3 at t = 1 hour and removed at t = 1 3/4 hours.

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 1.00E+00 UNITS/INCH.

DERSON BOX 263
ITOCORRELATION FUNCTION Y IN PRODUCTS X IN LAGS

APPENDIX I

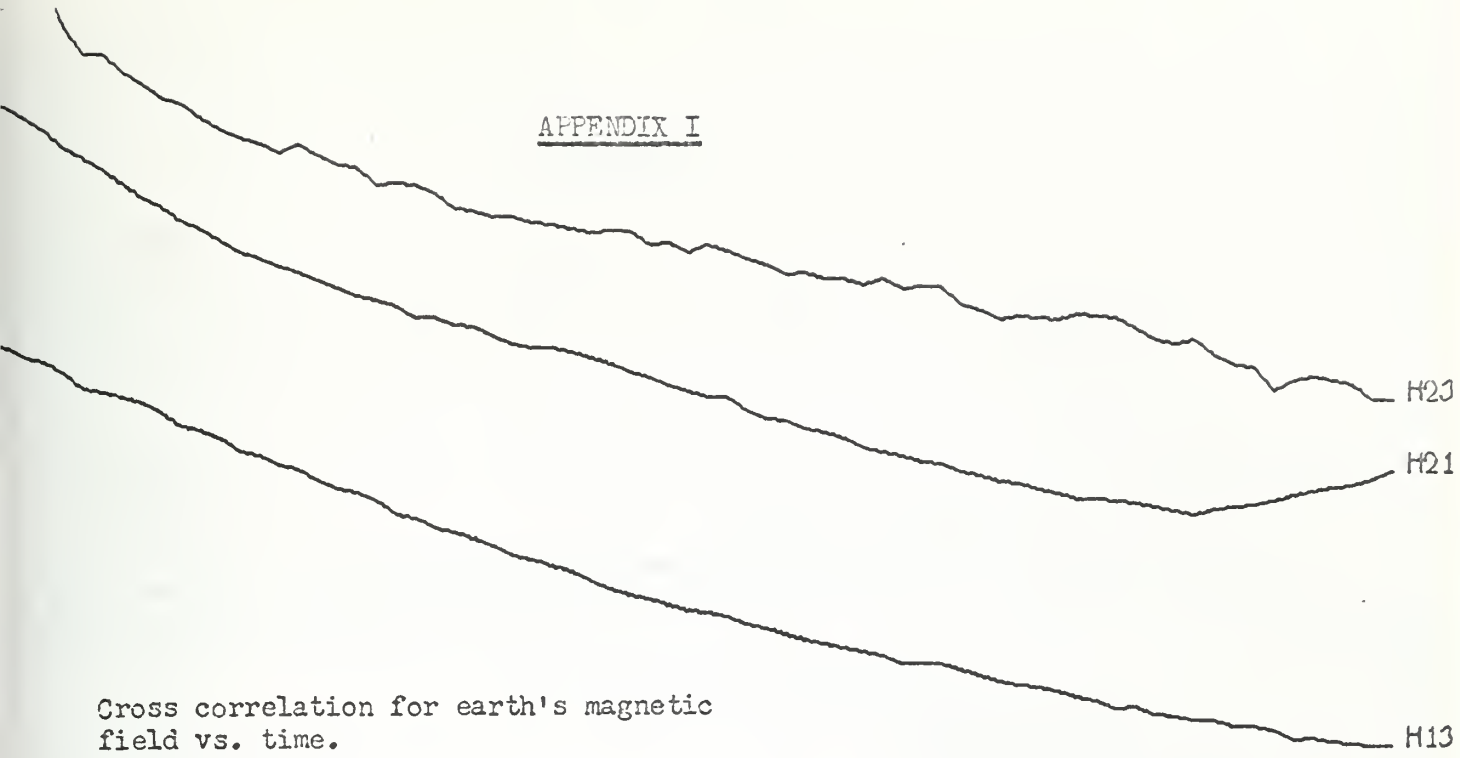

Cross correlation for earth's magnetic field vs. time.
Record length = 1 hour
Clock = 300 kc/s
H_{12} = Correlation (H_1 -mean H_1 and H_2 -mean H_2)
H_{13} = Correlation (H_1 -mean H_1 and H_3 -mean H_3)
H_{23} = Correlation (H_2 -mean H_2 and H_3 -mean H_3)
Lag = Δt
Perturbations:
± 5 gamma and ± 10 gamma applied at constant velocity to H_3. -2 gamma, -5 gamma, -5 gamma applied at constant velocity to H_3, H_2 and H_1 during first hour. A 5 gamma step applied to H_3 at t = 1 hour and removed at t = 1 3/4 hours.

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 1.00E+00 UNITS/INCH.

DERSON BOX 263
DSCORRELATION FUNCTION Y IN PRODUCTS X IN LAGS

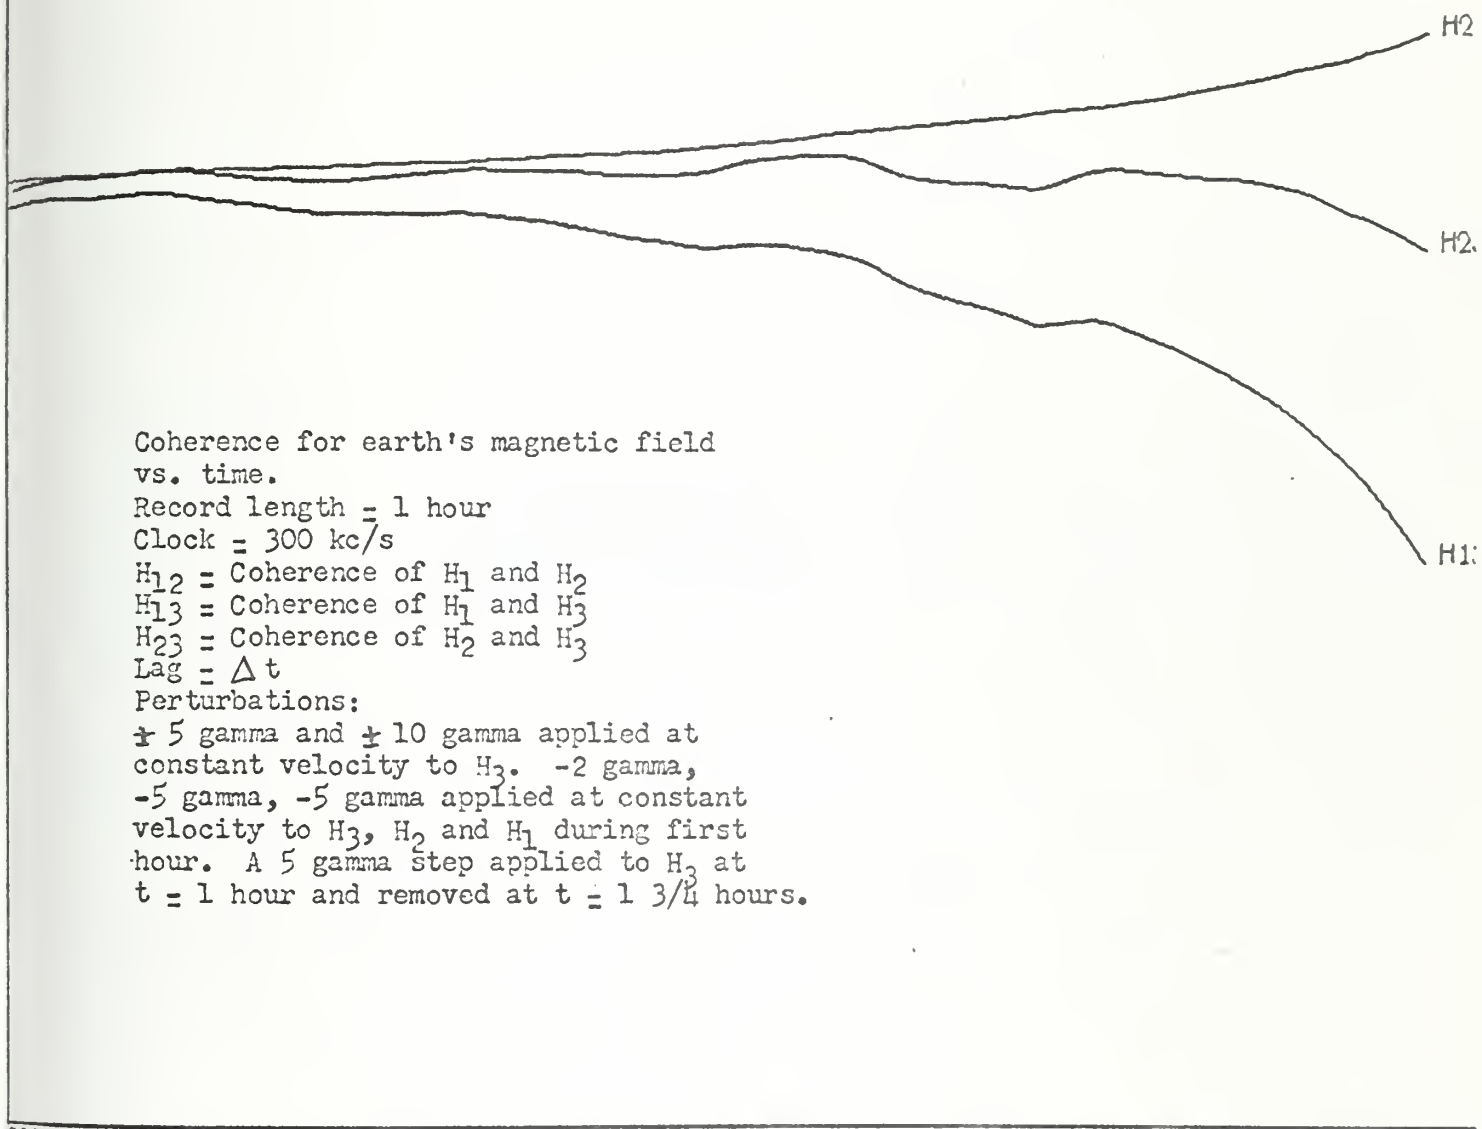

Coherence for earth's magnetic field
vs. time.
Record length = 1 hour
Clock = 300 kc/s
H_{12} = Coherence of H_1 and H_2
H_{13} = Coherence of H_1 and H_3
H_{23} = Coherence of H_2 and H_3
Lag = Δt
Perturbations:
$\pm$ 5 gamma and $\pm$ 10 gamma applied at constant velocity to H_3. -2 gamma, -5 gamma, -5 gamma applied at constant velocity to H_3, H_2 and H_1 during first hour. A 5 gamma step applied to H_3 at t = 1 hour and removed at t = 1 3/4 hours.

X-SCALE = 1.00E+01 UNITS/INCH.
Y-SCALE = 2.00E-01 UNITS/INCH.

ANDERSON BOX 263
COHERENCE FUNCTION Y IN COH X IN LAGS

APPENDIX II

160 PROGRAMS AND

OPERATOR INSTRUCTIONS

APPENDIX II

160 PROGRAMS AND OPERATOR INSTRUCTIONS

Starting Addresses	Function
0000	Rewind
0002	Read
0004	Search
0006	Write
0010	Write identification Block
0100	Main Input Program

Error Stops	Cause
ERR01	77_8 of current input in error
ERR02	Memory storage not complete
ERR04	End of storage tape
ERR03	163 not ready

Addresses of Important Counters	Information
0057	Number of blocks written on storage tape
0045	Current storage location in memory
0046	Number of zero words in memory

Operator Instructions

1. Load program and make the necessary cable connections.
2. Set identifying records in cells 30_8 to 37_8.
3. Write identifying block (run from P = 010). Stop at P = 100.
4. Set cell 100 = 2200

   57 = 0
5. Start Ampex C.P. 100 and run from P = 100. Stop when tape is finished or ERR stop.

APPENDIX II

INPUT PROGRAM

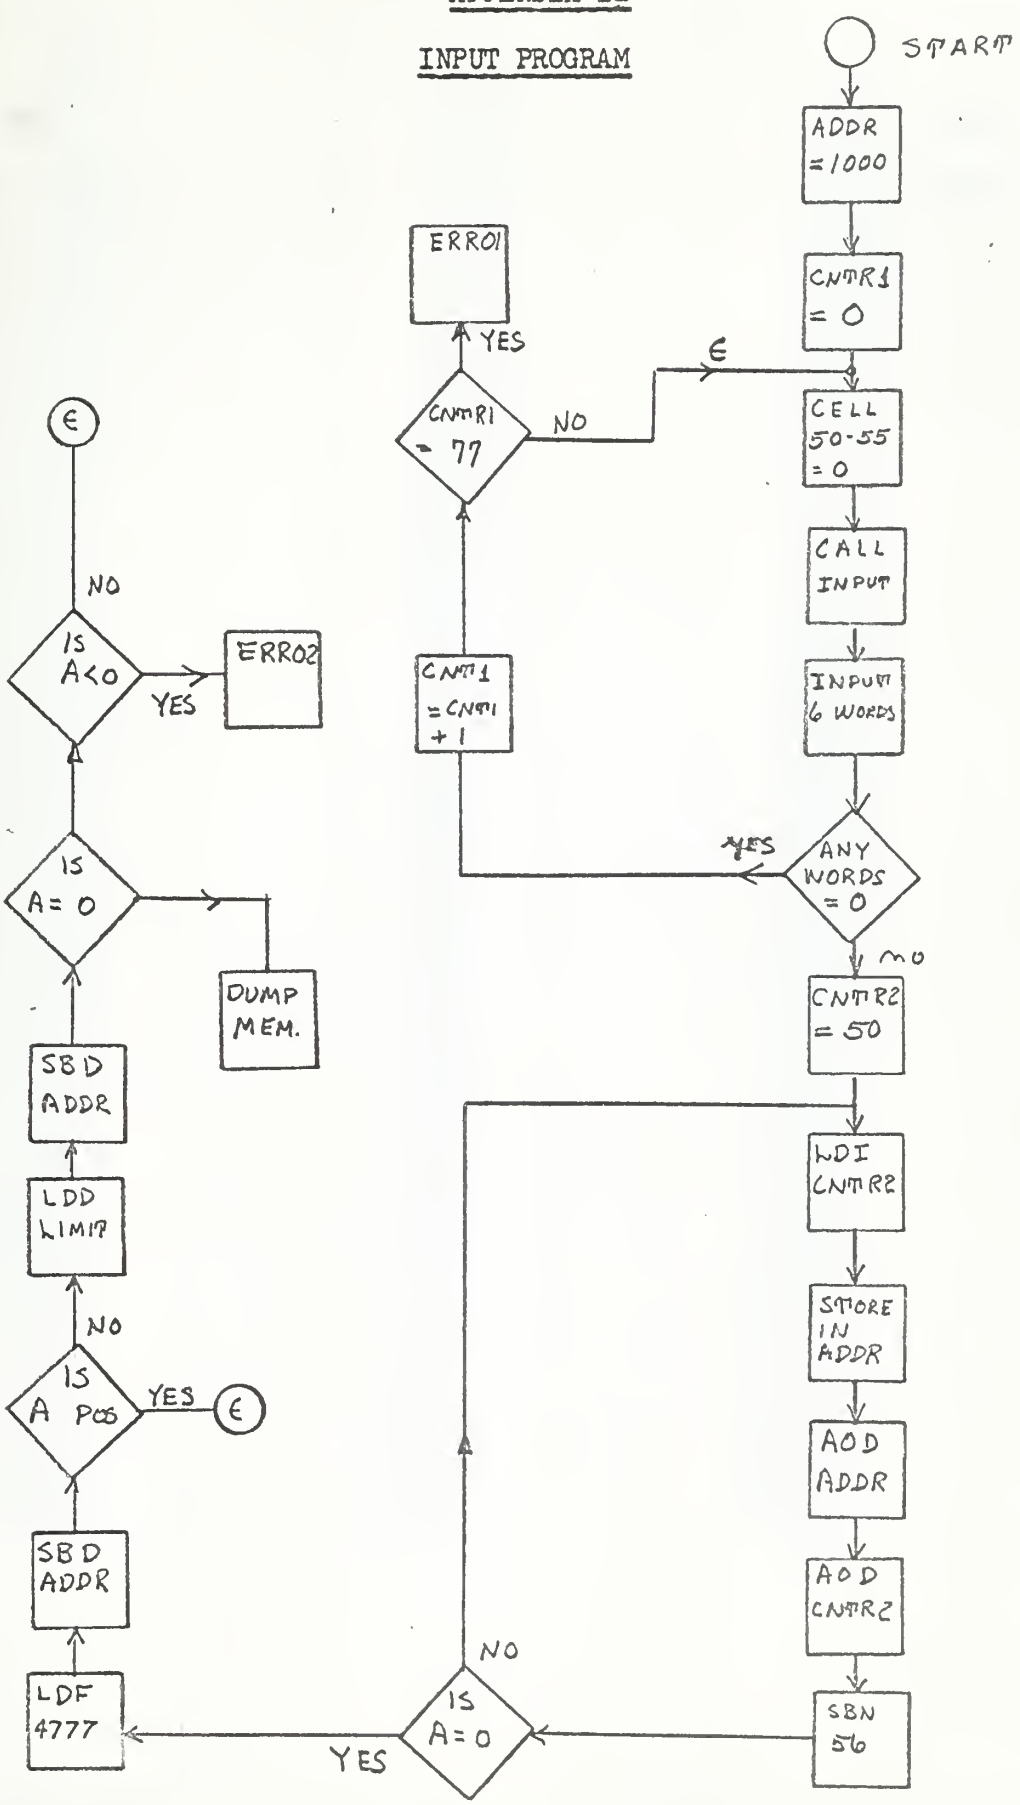

APPENDIX II

```
0100  2200  LDF00
0101  1000   1000
0102  4045  STD45 (ADDR)
0103  0400  LDN00
0104  4046  STD46 (CNTR1)
0105  0400  LDN00
0106  4150  STI50
0107  4151  STI51
0110  4152  STI52
0111  4153  STI53
0112  4154  STI54
0113  4155  STI55
0114  7500  EXF00
0115  0500   0500
0116  7203  INP03
0117  0620   0620
0120  6102  NZF02
0121  0600   0600
0122  1600  LSF00
0123  0607  ADN07
0124  6115  NZF15
0125  2150  LDI50
0126  6013  ZJF13
0127  2151  LDI51
0130  6011  ZJF11
0131  2152  LDI52
0132  6007  ZJF07
0133  2153  LDI53
0134  6005  ZJF05
0135  2154  LDI54
0136  6003  ZJF03
0137  2155  LDI55
0140  6105  NZF05
0141  5446  AOD46
0142  0777  SBN77
0143  6536  NZB36
0144  0001  ERR01
0145  2050  LBD50
0146  4047  STD47
0147  2147  LDI47
0150  4145  STI45
0151  5445  AOD45
0152  5447  AOD47
0153  3456  SBD56
0154  6505  NZB05
0155  2200  LDF00
0156  4777   4777
```

APPENDIX II

0157	3445	SBD45
0160	6653	PJB53
0161	2044	LDD44
0162	3445	SBD45
0163	6003	ZJF03
0164	6657	PJB57
0165	0002	ERR02
0166	7101	JFI01
0167	0172	WRITE
0170	1000	
0171	7700	HLT00

ADDITIONAL CELLS USED

0044	LIMIT	(PUT IN LIMIT)
0045	ADDR	7600
0046	CNTR 1	
0047	CNTR 2	
0050	BUFFER STORAGE	
0051	BUFFER STORAGE	
0052	BUFFER STORAGE	
0053	BUFFER STORAGE	
0054	BUFFER STORAGE	
0055	BUFFER STORAGE	
0057	NUMBER OF MEMORY DUMPS	

APPENDIX II

MEMORY DUMP TO M.T.

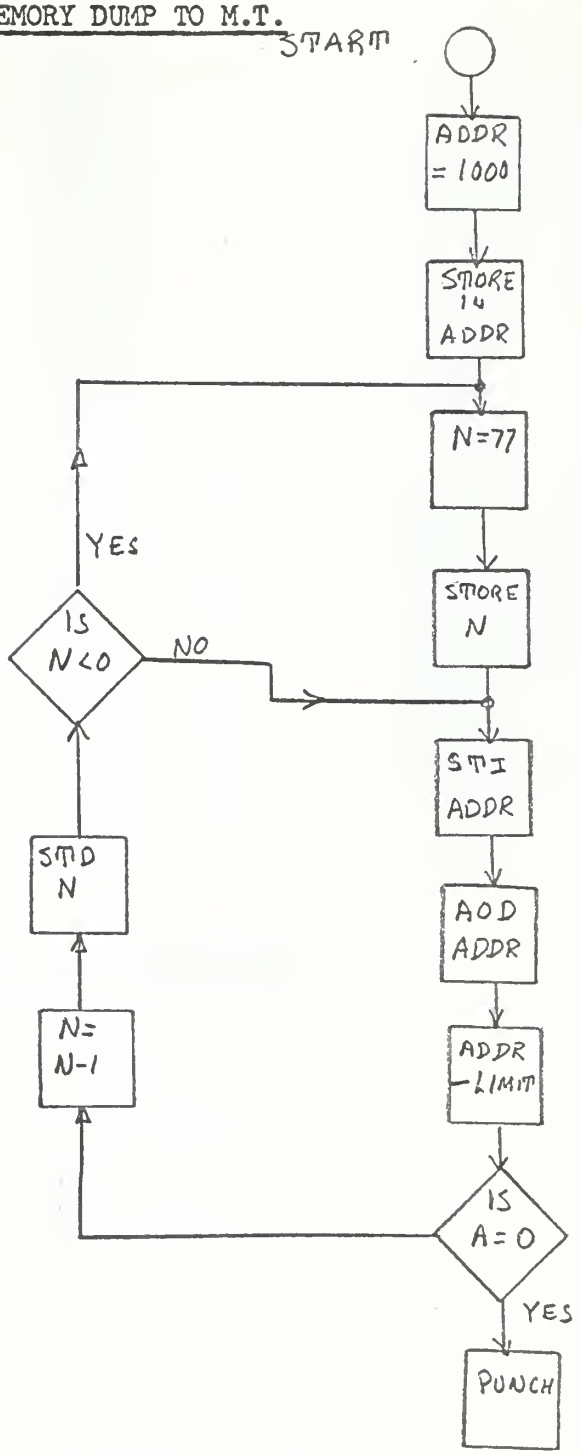

APPENDIX II

```
0172    5457        AOD57
0173    2600        LCF00
0174    7776
0175    4060        STD60
0176    7500        EXF00
0177    1141        REQ STAT
0200    7600        INA00
0201    0202        LPN02
0202    6004        ZJF04
0203    5460        AOD60
0204    6506        NZB06
0205    0003        ERR03
0206    7500        EXF00
0207    2111         2111
0210    7303        OUT03
0211    7600   TERM OUT    (LIMIT + 1)
0212    6102        NZF02
0213    1000        INIT WRIT
0214    7500        EXF00
0215    1141        REQ STAT
0216    7600        INA00
0217    0240        LPN40
0220    6103        NZF03
0221    7101        JFI01
0222    0100           00
0223    7700        HLT00
```

DUMP TO PAPER TAPE

```
0163    7500
0164    4104
0165    7303
0166    7600
0167    6102
0170    1000
0171    7700
```

APPENDIX II

DAILY IDENTIFICATION

USE 8 CELLS		EXAMPLE
0030	0070	2 day
0031	0064	3
0032	0032	J
0033	0030	A month
0034	0060	N
0035	0072	6
0036	0062	4 year
0037	0045	CAR RET

APPENDIX II

DAILY RECORD TO M.T.

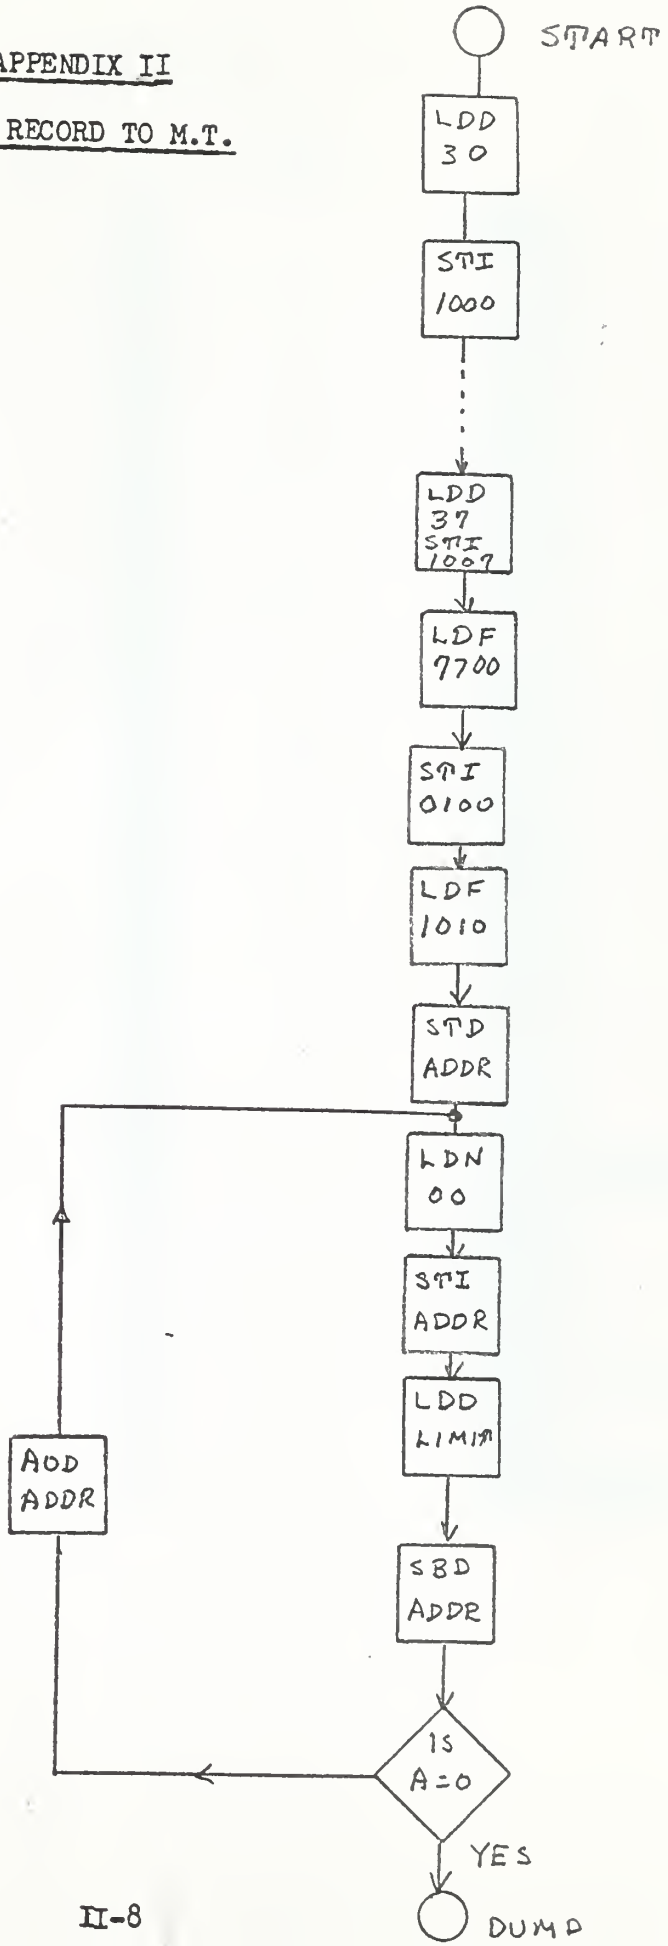

APPENDIX II

DAILY RECORD TO M.T.

```
0224    2030    LDD30
0225    4100    STI00
0226    1000     1000
0227    2031    LDD31
0230    4100    STI00
0231    1001     1001
0232    2032    LDD32
0233    4100    STI00
0234    1002     1002
0235    2033    LDD33
0236    4100    STI00
0237    1003     1003
0240    2034    LDD34
0241    4100    STI00
0242    1004     1004
0243    2035    LDD35
0244    4100    STI00
0245    1005     1005
0246    2036    LDD36
0247    4100    STI00
0250    1006     1006
0251    2037    LDD37
0252    4100    STI00
0253    1007     1007
0254    2200    LDF00
0255    7700     7700
0256    4100    STI00
0257    0100     0100
0260    2200    LDF00
0261    1010     1010
0262    4045    STD45 (ADDR)
0263    0400    LDN00
0264    4145    STI45
0265    2044    LDD44
0266    3445    SBD45
0267    6003    ZJF03
0270    5445    AOD45 (ADDR)
0271    6506    NZB06
0272    7101    JFI01
0273    0172     0172 (DUMP)
0274    7700    NORMAL STOP
```

REWIND, READ AND

DAILY RECORD SEARCH

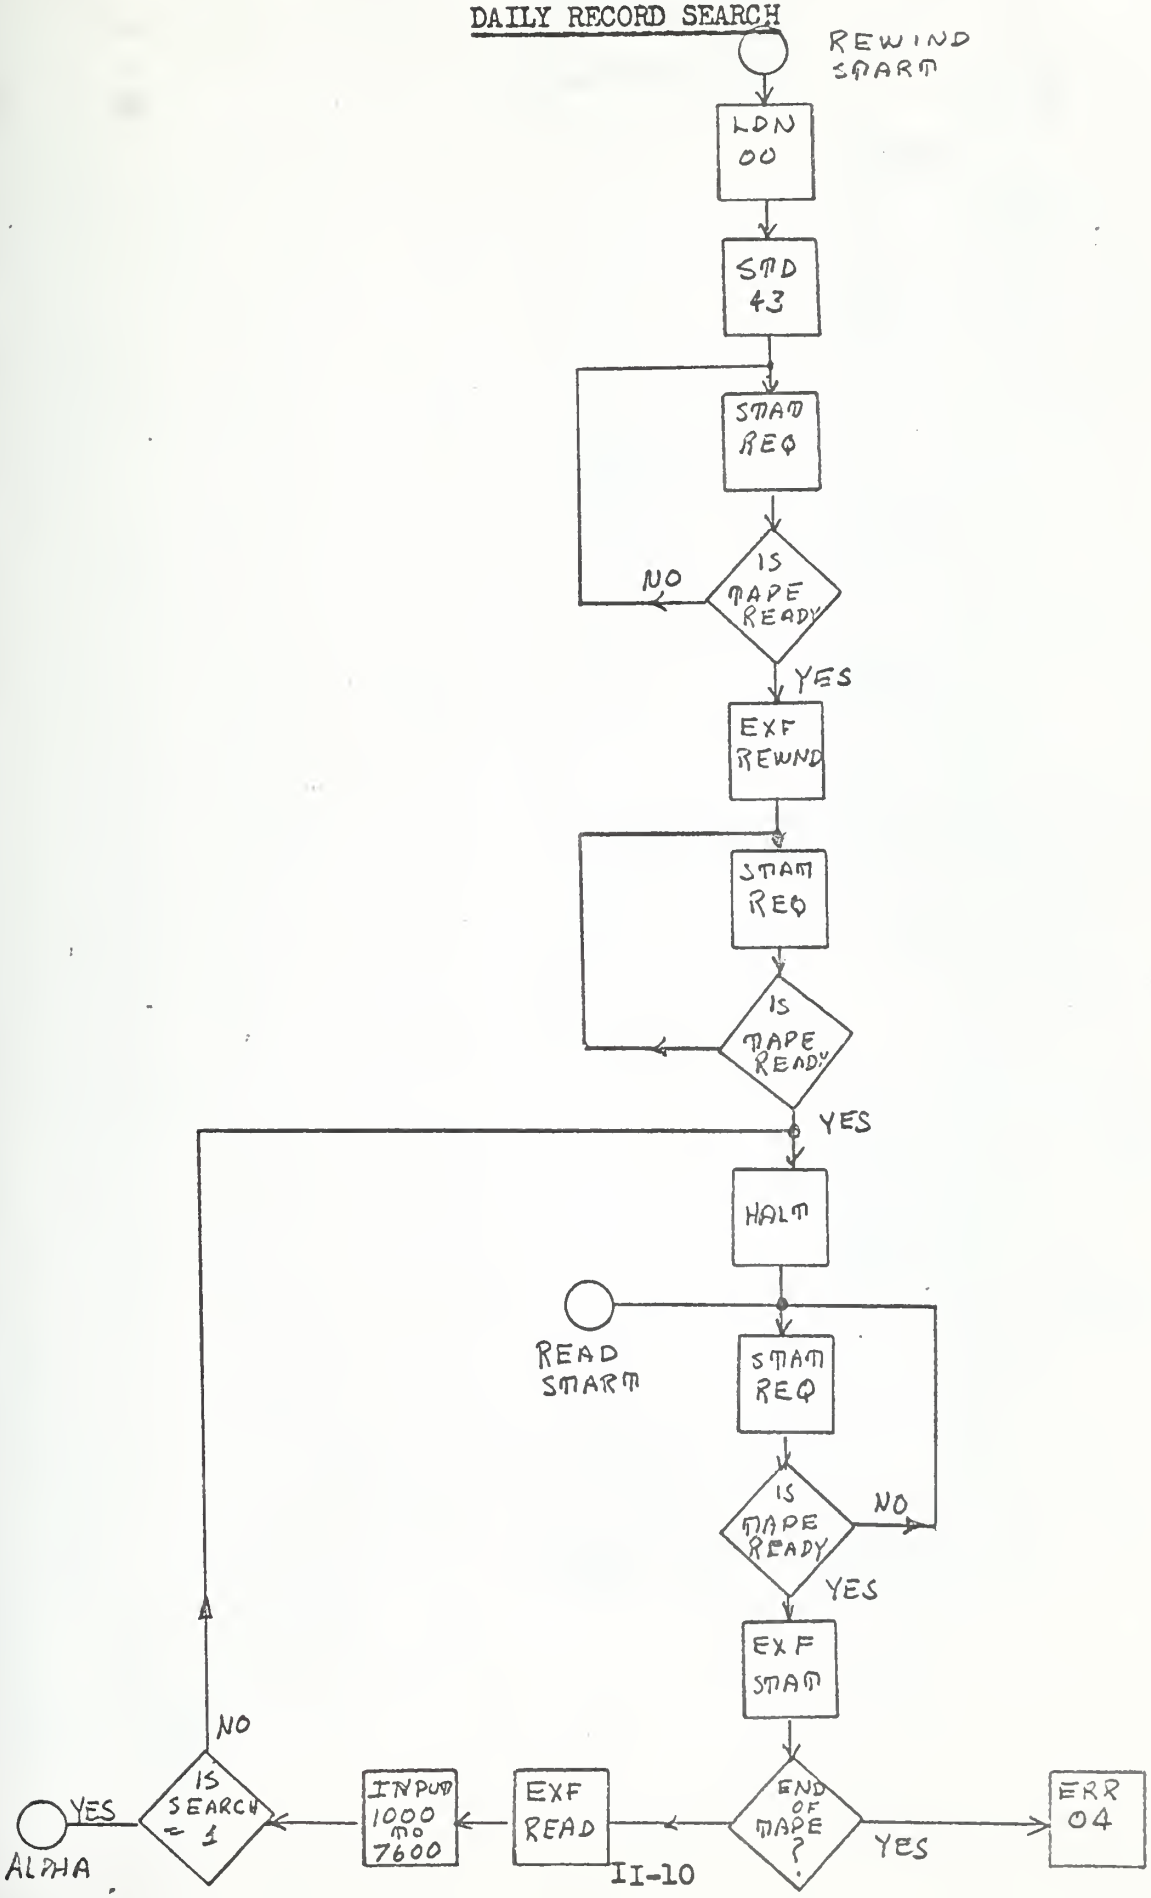

REWIND, READ AND DAILY RECORD SEARCH

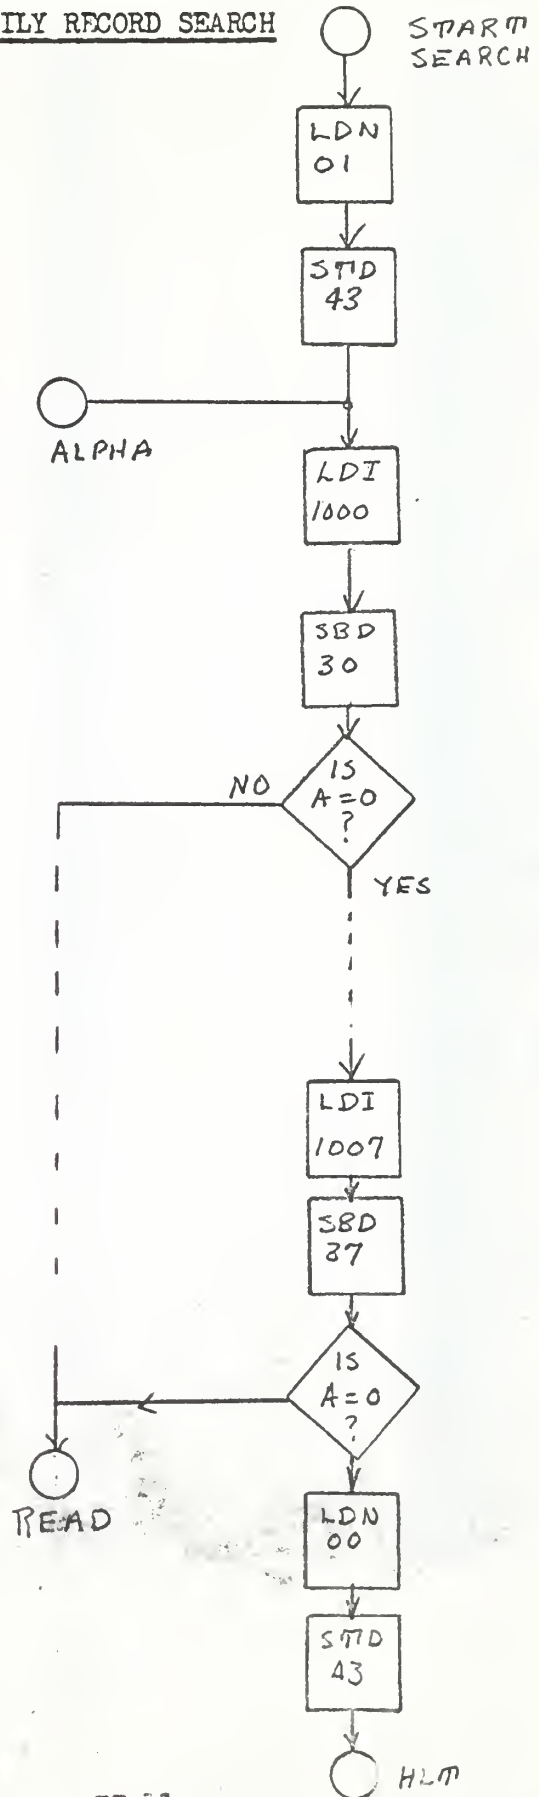

```
Start
Rewind 0275   0400   LDN00
       0276   4043   STD43
       0277   7500   EXF00
       0300   1141   REQ STAT
       0301   7600   INA00
       0302   0202   LPN02
       0303   6504   NZB04
       0304   7500   EXF00
       0305   1161   REWIND
       0306   7500   EXF00
       0307   1141   REQ STAT
       0310   7600   INA00
       0311   0202   LPN02
       0312   6504   NZB04
Read   0313   7700   HLT00
Start  0314   7500   EXF00
       0315   1141   REQ STAT
       0316   7600   INA0C
       0317   0202   LPN02
       0320   6504   NZB04
       0321   7500   EXF00
       0322   2111   EXF11 READ
       0323   7203   OUT03
       0324   7600   TERM READ
       0325   6102   NZF02
       0326   1000   INIT READ
       0327   7500   EXF00
       0330   1141   REQ STAT
       0331   7600   INA00
       0332   0240   LPN40
       0333   6002   ZJF02
       0334   0004   ERR04 (END OF
       0335   2043   LDD43   TAPE)
       0336   0701   SBN01
       0337   6004   ZJF04
       0340   6525   NZB25
Search 0341   0401   LDN01
Start  0342   4043   STD43 (SEARCH)
       0343   2100   LDI00
       0344   1000    1000
       0345   3430   SBD30
       0346   6532   NZB32
       0347   2100   LDI00
       0350   1001    1001
       0351   3431   SBD31
       0352   6536   NZB36
       0353   2100   LDI00
```

APPENDIX II

```
0354    1002     1002
0355    3432     SBD32
0356    6542     NZB42
0357    2100     LDI00
0360    1003     1003
0361    3433     SBD33
0362    6546     NZB46
0363    2100     LDI00
0364    1004     1004
0365    3434     SBD34
0366    6552     NZB52
0367    2100     LDI00
0370    1005     1005
0371    3435     SBD35
0372    6556     NZB56
0373    2100     LDI00
0374    1006     1006
0375    3436     SBD36
0376    6114     NZF14
0377    2100     LDI00
0400    1007     1007
0401    3437     SBD37
0402    6110     NZF10
0403    2100     LDI00
0404    1010     1010
0405    6105     NZF05
0406    0400     LDN00
0407    4043     STD43
0410    7101     JFI01
0411    0077     0077
0412    7101     JFI01
0413    0314
```

TEST TAPE 22 BLOCKS DATA

$M = 47145_{10}$

$= 0013\ \ 4051_8$
$\quad N_2 \quad\ N_1$

```
LIMIT   CELL 44 = 7600
ADDR    CELL 45
CNTR 2  CELL 21
N1      CELL 22
N2      CELL 23
CNTR 1  CELL 20
```

```
0526    7700     HLT00
0527    0400     LDN00
0530    4021     STD21
0531    2200     LDF00
0532    1000     1000
```

```
0533  4045  STD45
0534  0413  LDN13
0535  4023  STD23
0536  0400  LDN00
0537  4020  STD20
0540  2200  LDF00
0541  4051   4051
0542  4022  STD22
0543  2021  LDD21
0544  0726  SBN26
0545  6417  ZJB17
0546  2023  LDD23
0547  4145  STI45
0550  5445  AOD45
0551  2022  LDD22
0552  4145  STI45
0553  5445  AOD45
0554  5422  AOD22
0555  5420  AOD20
0556  2200  LDF00
0557  4777   4777
0560  3445  SBD45
0561  6207  PJF07
0562  2044  LDD44
0563  3445  SBD45
0564  6104  NZF04
0565  5421  AOD21
0566  7101  JFI01
0567  0172   0172
0570  2020  LDD20
0571  0777  SBN77
0572  6434  ZJB34
0573  6525  NZB25
```

APPENDIX II

WRITE TEST TAPE

22 BLOCKS DATA

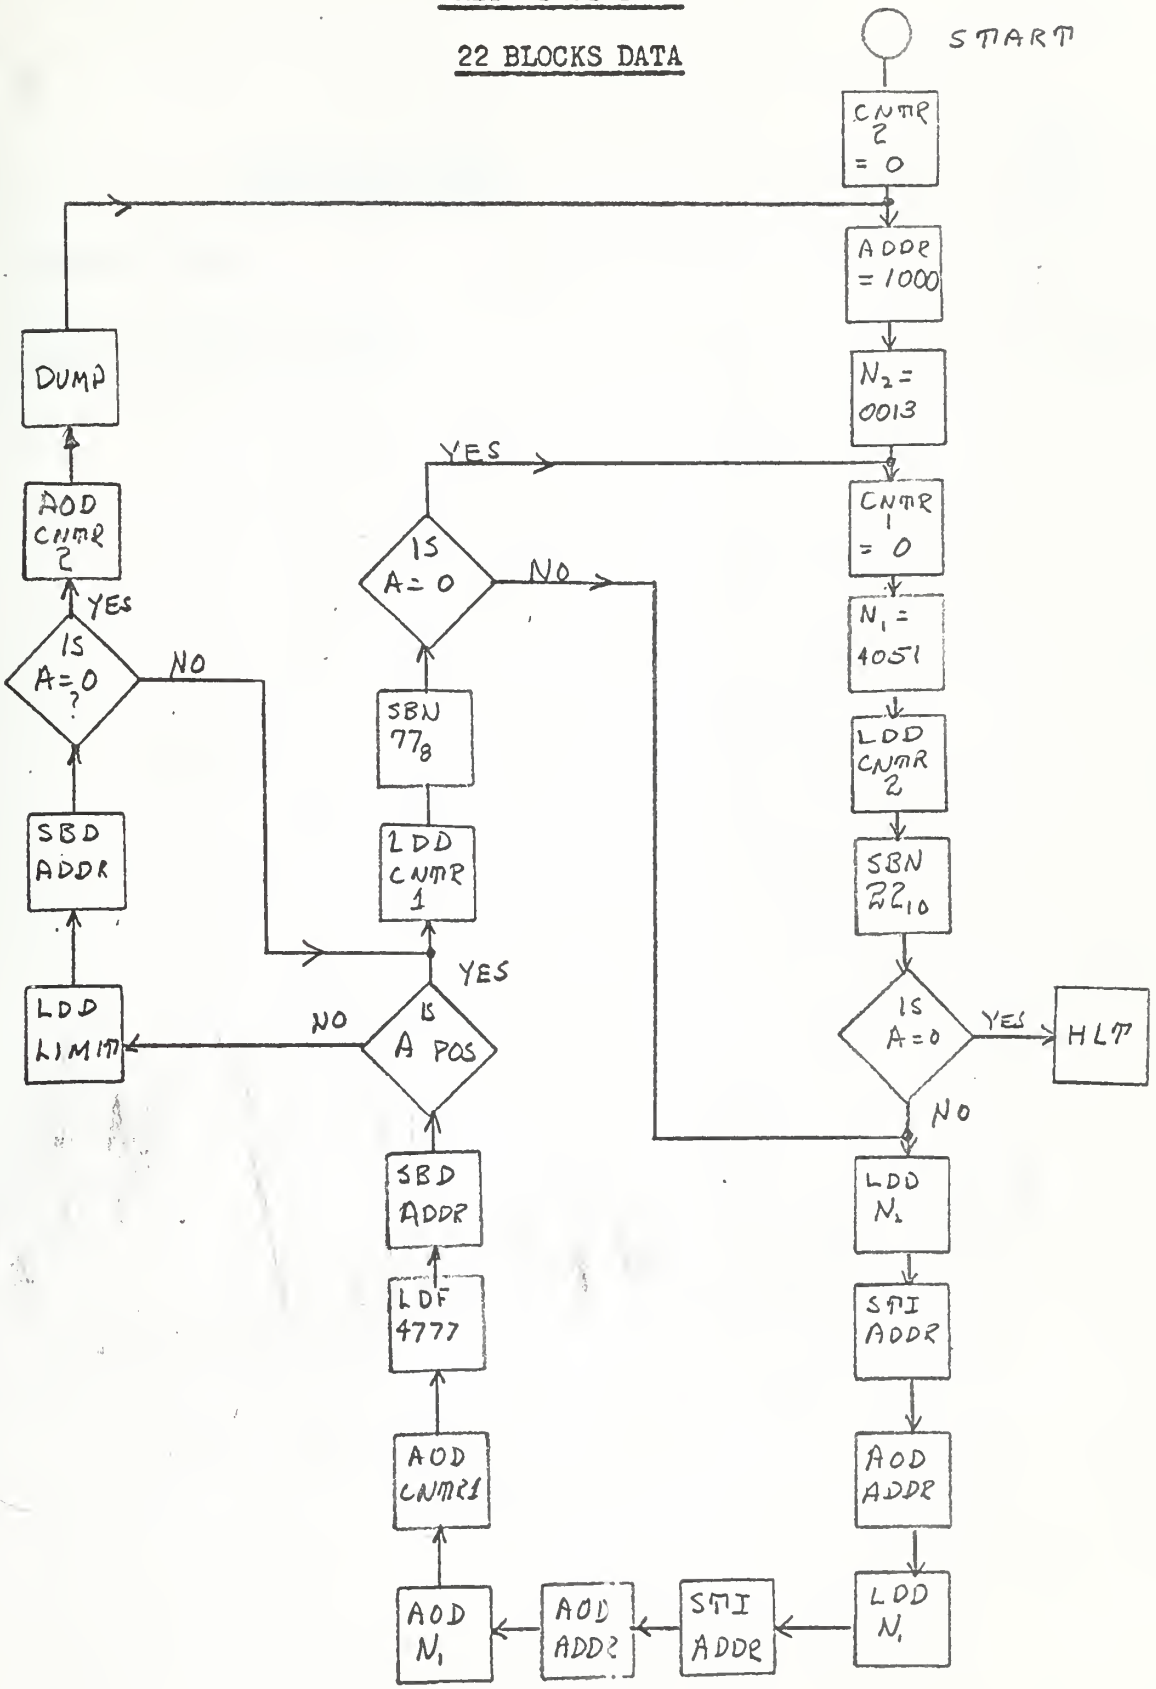

APPENDIX III

FORTRAN PROGRAMS	PAGE
ANALYSIS PROGRAM	1
SATELLITE DISPLAY PROGRAM	7

```
      DIMENSION NDATA(864),DATE(100),H(1728),HONE(900),ITITLE(12),
     1HTWO(900),HTHRE(900),T(900),BIN1(100),BIN2(100),BIN3(100),X(100)
      DO 5 J = 1,14
      READ 5,DATE(J)
    5 FORMAT(O16)
      CON(MASK = 00000000777777778)
      ENA(NDATA),INA(1).
      STA(INIT),INA(864).
      STA(ITERM),ENI(0).
    6 CALL READ(5,INIT,ITERM,1)
      DO 70 I=3,5
      SLS1(7)
    7 ADATE = DATE(I)
      BDATE = DATE(I+1)
      LDA(ADATE),SUB(NDATA +1),AJP1(6),
      LDA(BDATE),SUB(NDATA +2),AJP1(6).
      NBLOC = 0
   30 CALL READ(5,INIT,ITERM,1)
      NZRO = 0
      DO 81 J=1,864
      IF(NDATA(J)) 82,82,81
   82 NZRO = NZRO+1
   81 CONTINUE
      ND = NDATA(3)
      LDA(ND),AJP0(10).
      K=0
      DO 40 J=1,864
      K=K+1
      INDATA = NDATA(J)
      LDA(INDATA),LDQ(MASK),ARS(24),STL(INLIST).
      H(K)=INLIST
      K=K+1
      LDA(INDATA),LDQ(MASK),STL(INLIST).
      SLS1(40).
   40 H(K)=INLIST
      AVE=0.
      DO 50 J =1,1728
      H(J) = H(J)/3.
      H(J)=1024./H(J)*2348400.0
   50 AVE = H(J) + AVE


      PRINT 26, AVE
C ZAPP FILTER
      NERR =  0
      AVE = 0.
      HBAR = 50950.0
      DO 51 J=1,1728
      DEV = ABSF(H(J)-HBAR)
      IF(DEV-200.) 51,52,52
      JCOUNT = J
   52 NERR = NERR + 1
      IF(J-3) 53,53,54
   53 H(J) = H(J+3)
      GO TO 51
   54 H(J) = H(J-3)
   51 AVE = AVE + H(J)
      AVE = AVE/1728.
      PRINT 26, AVE
      PRINT 97,NERR,NZRO,JCOUNT
      NBLOC = NBLOC + 1
      WRITE TAPE 2, H
      GO TO 30
   10 REWIND 2
C THIS SECTION COMPUTES H VS TIME
C 18 PT AVE N IS TOTAL NUMBER OF POINTS PER DAY
      TIME = - 6.5/704.
      DO 60 L=1,NBLOC
      READ TAPE 2,H
      DO 62 J=1,32
      H1BAR = 0.
      H2BAR = 0.
      H3BAR = 0.
      DO 61 K=1,18
      M = 3*K - 2 + (J - 1)*54
      H1BAR = H(M) + H1BAR
      H2BAR = H(M+1) + H2BAR
   61 H3BAR = H(M+2) + H3BAR
      N = J + (L-1)*32
      HONE(N) = H1BAR/18.
      HTWO(N) = H2BAR/18.
      HTHRE(N) = H3BAR/18.
      TIME = TIME + 6.5/704.
   62 T(N) = TIME
   60 CONTINUE
```

```
      REWIND 2
      PRINT 27,N
      PRINT 27,M
      NPTS=N
C MEAN VALUE OF DIFFERENCES
      JERR = 0
      IERR = 0
      NERR = 0
      DEL1 = 0.
      DEL2 = 0.
      DEL3 = 0.
      DO 64 J = 1,NBLOC
      READ TAPE 2,H
      DO 64 L = 1,576
      M = 3*L-2
      DEL = H(M + 1) - H(M)
      IF(ABSF(DEL)- 40.) 65,66,66
   65 DEL1 = DEL1 + DEL
      GO TO 67
   66 NERR = NERR + 1
   67 DEL = H(M + 1) -H(M + 2)
      IF(ABSF(DEL) - 40.) 68,69,69
   68 DEL2 = DEL2 + DEL
      GO TO 71
   69 IERR = IERR + 1
   71 DEL = H(M) - H(M + 2)
      IF(ABSF(DEL) - 40.) 72,73,73
   72 DEL3 = DEL3 + DEL
      GO TO 64
   73 JERR = JERR + 1
   64 CONTINUE
      REWIND 2
      PRINT 97,NERR,IERR,JERR
   97 FORMAT(3I20)
      ABLOC = NBLOC
      DEL1 = DEL1/(576.*ABLOC)
      DEL2 = DEL2/(576.*ABLOC)
      DEL3 = DEL3/(576.*ABLOC)
      PRINT 49,DEL1,DEL2,DEL3
C DENSITY FUNCTION
      STDEV1=0.
      STDEV2=0.
      STDEV3=0.
      NERR = 0
      IERR = 0
      JERR = 0
      XL=-25.
      DO 45 K=1,100
      BIN1(K)=0.
      BIN2(K)=0.
      BIN3(K)=0.
      X(K)=XL
   45 XL= XL+0.5
      DO 74 J=1,NBLOC
      READ TAPE 2,H
      DO 74 L = 1,576
      M = 3*L-2
      STDEV1= (H(M+1)-H(M)-DEL1)**2 +STDEV1
      STDEV2= (H(M+1)-H(M+2)-DEL2)**2 + STDEV2
      STDEV3= (H(M)-H(M+2)-DEL3)**2 +STDEV3
      DEL = H(M+1) - H(M)
      IF(ABSF(DEL-DEL1)-25.)75,75,76
   76 NERR = NERR + 1
   75 DEL = H(M+1) -H(M+2)
      IF(ABSF(DEL-DEL2)-25.)77,77,78
   78 IERR = IERR + 1
   77 DEL = H(M) - H(M+2)
      IF(ABSF(DEL-DEL3)-25.)29,29,80
   80 JERR = JERR + 1
   29 DO 31 K=1,3
      IF(K-2)32,33,34
   32 DEL=H(M+1)-H(M)-DEL1
      GO TO 35
   33 DEL=H(M+1)-H(M+2)-DEL2
      GO TO 35
   34 DEL=H(M)-H(M+2)-DEL3
   35 XL= -25.
      DO 36 N=1,100
      IF(DEL-XL) 37,37,38
   38 IF(DEL-(XL+0.5))39,39,37
   39 IF(K-2) 42,43,44
   42 BIN1(N)=BIN1(N)+1.
      GO TO 31
   43 BIN2(N) = BIN2(N)+1.
      GO TO 31
```

```
   30 CONTINUE
   31 CONTINUE
   74 CONTINUE
      STDEV1 =SQRTF(STDEV1/(576.*ABLOC))
      STDEV2 =SQRTF(STDEV2/(576.*ABLOC))
      STDEV3 =SQRTF(STDEV3/(576.*ABLOC))
      PRINT 49,STDEV1,STDEV2,STDEV3
      PRINT 97,NERR,IERR,JERR                    APPENDIX III
      REWIND 2
C NORMALIZED  DENSITY FUNCTION
      AMAX=BIN1(1)
      BMAX=BIN2(1)
      CMAX=BIN3(1)
      DO 200 J=1,100
      IF(AMAX-BIN1(J))201,202,202
  201 AMAX=BIN1(J)
  202 IF(BMAX-BIN2(J))203,204,204
  203 BM+XOBIM2(-)+++++++++/+/++++++++S++S+++++++//++++++++++S          //
  204 IF(CMAX-BIN3(J))205,200,200
  205 CMAX=BIN3(J)
  200 CONTINUN
      PRINT 49,AMAX,BMAX,CMAX
      DO 206 J=1,100
      BIN1(J)=BIN1(J)/AMAX
      BIN2(J)=BIN2(J)/BMAX
  206 BIN3(J)=BIN3(J)/CMAX
      DO 46 K=1,12
   46 ITITLE(K)=8H
      ITITLE(1)=8HANDERSON
      ITITLE(2)=8H BOX 263
      ITITLE(7)=8H DENSITY
      ITITLE(8)=8H FUNCTIO
      ITITLE(9)=8HN X IN G
      ITITLE(10)=8HAMMA Y
      ITITLE(11)=8HIN FREQ
      LABA=4H P1
      LABB=4H P2
      LABC=4H P3
      CALL DRAW(100,X,BIN1,0,C,LABA,ITITLE,0,0,0,4,0,2,8,8,0,LAST)
      CALL DRAW(100,X,BIN2,0,C,LABB,ITITLE,0,0,0,4,0,2,8,8,0,LAST)
      CALL DRAW(100,X,BIN3,0,C,LABC,ITITLE,0,0,0,4,0,2,8,8,0,LAST)
  506 N=NPTS
      HONEAV=0.
      HTWOAV=0.
      HTHREAV=0.
      DO 48 L=1,N
      HONEAV=HONEAV+HONE(L)
      HTWOAV=HTWOAV+HTWO(L)
   48 HTHREAV=HTHREAV+HTHRE(L)
      SV04 = N
      HONEAV = HONEAV/SV04
      HTWOAV = HTWOAV/SV04
      HTHREAV = HTHREAV/SV04
      PRINT 49,HONEAV,HTWOAV,HTHREAV
   49 FORMAT(3E20.7)
      PRINT 27,NBLOC
   27 FORMAT(I7)
      HONEAV= (HONEAV +HTWOAV +HTHREAV)/3.
      PRINT 26,HONEAV
   26 FORMAT(E20.7)
      WRITE TAPE 2, HONE
      WRITE TAPE 2, HTWO
      WRITE TAPE 2, HTHRE
      REWIND 2
      DO 90 L = 1,N
      HONE(L) = HONE(L) - HONEAV
      HTWO(L) = HTWO(L) - HONEAV
   90 HTHRE(L) = HTHRE(L) - HONEAV
      DO 1 L=1,12
    1 ITITLE(L) = 8H
      ITITLE(1)=8HANDERSON
      ITITLE(2)=8H BOX 263
      ITITLE(7)=8H EARTHS
      ITITLE(8)=8HMAGNETIC
      ITITLE(9)=8H FIELD V
      ITITLE(10)=8HS TIME
      ITITLE(11)=8HT IN HRS
      ITITLE(12)=8H H GAMMA                      III-3
      LABA=4H H1
      LABB=4H H2
      LABC=4H H3
      CALL DRAW(N,T,HONE,1,0,LABA,ITITLE,1.0,10.0,5,1,2,2,8,10,0,LAST)
      CALL DRAW(N,T,HTWO,2,0,LABB,ITITLE,1.0,10.0,5,1,2,2,8,10,0,LAST)
      CALL DRAW(N,T,HTHRE,3,0,LABC,ITITLE,1.0,10.,5,1,2,2,8,10,0,LAST)
C Z TRANSFORM LOW PASS FILTER N EQUAL 20 TITUS
      AI= 4.*3.14116/100.
```

```
      IF(J-20) 302,303,303
  302 M=J
      GO TO 304
  303 M=20
  304 DO 301 K=1,M                          APPENDIX III
      L= K-1
      BL=L
      ASUM = EXPF(-AT*PL)+ASUM
      BSUM =EXPF(-AT*BL)*HONE(J-L)+BSUM
      CSUM =EXPF(-AT*BL)*HTWO(J-L) + CSUM
  301 DSUM = EXPF(-AT*BL)*HTHRE(J-L)+DSUM
      HONE(J)=BSUM/ASUM
      HTWO(J)= CSUM/ASUM
  300 HTHRE(J)= DSUM/ASUM
      ITITLE(2)=8H FILTER
      CALL DRAW(N,T,HONE,1,0,LABA,ITITLE,1.0,10.0,5,1,2,2,8,10,0,LAST)
      CALL DRAW(N,T,HTWO,2,0,LABB,ITITLE,1.0,10.0,5,1,2,2,8,10,0,LAST)
      CALL DRAW(N,T,HTHRE,3,0,LABC,ITITLE,1.0,10.,5,1,2,2,8,10,0,LAST)
C DIFFERENCES OF FILTERED VALVES
      DO 306 J = 1,N
      H(J)= HONE(J)
      HONE(J)= H(J)- HTWO(J)
      STORE = HTWO(J)
      HTWO(J)= H(J)-HTHRE(J)
  306 HTHRE(J)= STORE- HTHRE(J)
      ITITLE(7)=8HFILTERED
      ITITLE(8)=8HDIFFEREN
      ITITLE(9)=8HCE IN MA
      ITITLE(10)=8HG FIELD
      LABA=4HDEL1
      LABB=4HDEL2
      LABC=4HDEL3
      CALL DRAW(N,T,HONE,1,0,LABA,ITITLE,1.0,5.00,5,1,2,2,8,10,0,LAST)
      CALL DRAW(N,T,HTWO,2,0,LABB,ITITLE,1.0,5.00,5,1,2,2,8,10,0,LAST)
      CALL DRAW(N,T,HTHRE,3,0,LABC,ITITLE,1.0,5.0,5,1,2,2,8,10,0,LAST)
C THIS SECTION COMPUTES SIMPLE DIFF
      READ TAPE 2, HONE
      READ TAPE 2, HTWO
      READ TAPE 2, HTHRE
      REWIND 2
      DO 15 L=1,900
      H(L)=HONE(L)
      HONE(L)=H(L)-HTWO(L)
      STORE=HTWO(L)
      HTWO(L)=H(L)-HTHRE(L)
   15 HTHRE(L)=STORE-HTHRE(L)
      DO 16 L=1,12
   16 ITITLE(L)=8H
      ITITLE(1)=8HANDERSON
      ITITLE(2)=8H BOX 263
      ITITLE(7)=8HFIRST DI
      ITITLE(8)=8HFFERENCE
      ITITLE(9)=8H IN MAG
      ITITLE(10)=8HFIELD
      ITITLE(11)=8HT IN HRS
      ITITLE(12)=8H H GAMMA
      LABA=4HDEL1
      LABB=4HDEL2
      LABC=4HDEL3
      CALL DRAW(N,T,HONE,1,0,LABA,ITITLE,1.0,5.00,5,1,2,2,8,10,0,LAST)
      CALL DRAW(N,T,HTWO,2,0,LABB,ITITLE,1.0,5.00,5,1,2,2,8,10,0,LAST)
      CALL DRAW(N,T,HTHRE,3,0,LABC,ITITLE,1.0,5.0,5,1,2,2,8,10,0,LAST)
C AUTOCORRELATION FUNCTION 75LAGS
      NLAGS=75
      MPTS= N-NLAGS
      PTS= MPTS
      XL=0.
      DO 9 J=1,100
      BIN1(J)=0.
      BIN2(J)=0.
      BIN3(J)=0.
      X(J)=XL
    9 XL = XL+1.
      READ TAPE 2,HONE
      READ TAPE 2,HTWO                          III-4
      READ TAPE 2,HTHRE
      REWIND 2
      DO 11 J=1,N
      HONE(J) = HONE(J)- HONEAV
      HTWO(J) = HTWO(J) - HTWOAV
   11 HTHRE(J)=HTHRE(J)-HTHREAV
      DO 12 J=1,NLAGS
      DO 14 K=1,MPTS
      L=K-1
      BIN1(J) = BIN1(J) + HONE(K)*HONE(K+L)
```

```
      BIN2(J)= BIN2(J) + HTWO(K)*HTWO(L+J)
   14 BIN3(J)=BIN3(J) + HTHRE(K)*HTHRE(L+J)
      BIN1(J)=BIN1(J)/PTS
      BIN2(J)= BIN2(J)/PTS
   12 BIN3(J)= BIN3(J)/PTS
C SAVE AUTOCORRELATION  FUNCTION
      DO 105 J=1,100
      H(J)=BIN1(J)
      H(J+100)=BIN2(J)
  105 H(J+200)=BIN3(J)
      DO 100 J=1,12
  100 ITITLE(J)=8H
      ITITLE(1)=8HANDERSON
      ITITLE(2)=8H BOX 263
      ITITLE(7)=8HAUTOCORR
      ITITLE(8)=8HELATION
      ITITLE(9)=8HFUNCTION
      ITITLE(10)=8H Y IN PR
      ITITLE(11)=8HODUCTS X
      ITITLE(12)=8H IN LAGS
      LABA=4H H1
      LABB=4H H2
      LABC=4H H3
      CALL DRAW(NLAGS,X,BIN1,1,0,LABA,ITITLE,0,0,0,0,0,0,8,8,0,LAST)
      CALL DRAW(NLAGS,X,BIN2,2,0,LABB,ITITLE,0,0,0,0,0,0,8,8,0,LAST)
      CALL DRAW(NLAGS,X,BIN3,3,0,LABC,ITITLE,0,0,0,0,0,0,8,8,0,LAST)
C CROSS CORRELATION FUNCTION 75 LAGS
      DO 101 J=1,100
      BIN1(J)=0.
      BIN2(J)=0.
  101 BIN3(J)=0.
      DO 102 J=1,NLAGS
      DO 103 K=1,MPTS
      L= K-1
      BIN1(J)=BIN1(J)+ HTWO(K)*HONE(L+J)
      BIN2(J)=BIN2(J)+HTWO(K)*HTHRE(L+J)
  103 BIN3(J)=BIN3(J)+ HONE(K)*HTHRE(L+J)
      BIN1(J)=BIN1(J)/PTS
      BIN2(J)= BIN2(J)/PTS
  102 BIN3(J)= BIN3(J)/PTS
      DO 104 J=1,12
  104 ITITLE(J)=8H
      ITITLE(1)=8HANDERSON
      ITITLE(2) =8H BOX 263
      ITITLE(7) =8HCROSCORR
      ITITLE(8) =8HELATION
      ITITLE(9) =8HFUNCTION
      ITITLE(10)=8H Y IN PR
      ITITLE(11)=8HODUCTS X
      ITITLE(12)=8H IN LAGS
      LABA = 4H H21
      LABB = 4H H23
      LABC = 4H H13
      CALL DRAW(NLAGS,X,BIN1,1,0,LABA,ITITLE,0,0,0,0,0,0,8,8,0,LAST)
      CALL DRAW(NLAGS,X,BIN2,2,0,LABB,ITITLE,0,0,0,0,0,0,8,8,0,LAST)
      CALL DRAW(NLAGS,X,BIN3,3,0,LABC,ITITLE,0,0,0,0,0,0,8,8,0,LAST)
C COHERENCY  COMPUTATION 75 LAGS
      DO 106 J = 1,NLAGS
      BIN1(J)=(BIN1(J)**2)/(H(J+100)*H(J))
      IF(BIN1(J)) 107,108,108
  107 BIN1(J)=-BIN1(J)
  108 BIN1(J)= SQRTF(BIN1(J))
      BIN2(J)=(BIN2(J)**2)/(H(J+100)*H(J+200))
      IF(BIN2(J)) 109,110,110
  109 BIN2(J)=-BIN2(J)
  110 BIN2(J)= SQRTF(BIN2(J))
      BIN3(J)=(BIN3(J)**2)/(H(J)*H(J+200))
      IF(BIN3(J)) 111,106,106
  111 BIN3(J)=-BIN3(J)
  106 BIN3(J)= SQRTF(BIN3(J))
      ITITLE(7)=8HCOHERENC
      ITITLE(8)=8HE
      ITITLE(10)=8H Y IN CO
      ITITLE(11)=8HH X IN L
      ITITLE(12)=8HAGS
      CALL DRAW(NLAGS,X,BIN1,1,0,LABA,ITITLE,0,.2,0,0,0,0,8,8,0,LAST)
      CALL DRAW(NLAGS,X,BIN2,2,0,LABB,ITITLE,0,.2,0,0,0,0,8,8,0,LAST)
      CALL DRAW(NLAGS,X,BIN3,3,0,LABC,ITITLE,0,.2,0,0,0,0,8,8,0,LAST)
   70 CONTINUE
      REWIND 3
      STOP
      END
      MACHINE READ(1ARG,2ARG,3ARG,4ARG)
```

```
* TYPEWRITER MESSAGE CODE TABLE

      CON(T6 =4504041220302204B,   T7 =1120061301050420B,
     *    T8 =1212031200000000B,   T9 =4504041220302204B,
     *    T10=1536121401250420B,   T11=1212031200000000B)
      CON(T12=4504041220302204B,   T13=2006220403260426B,
     *    T14=1411200000000000B,   T15=4504043112140120B,
     *    T40=4504040130152004B,   T41=3406140104060301B,
     *    T42=0414062214163001B,   T43=2022420000000000B)

* TAPE UNIT ASSIGNMENT TABLE
*     ASSIGNMENTS FOR CHANNEL 3/4 LIBRARY TAPE

      CON(K0 =0       ,   K1 =3320108,   K2 =3320208,
     *    K3 =3320308,   K4 =3320408,   K5 =5520108,
     *    K6 =5520208,   K7 =5520308,   K8 =5520408)

* ASSORTED CONSTANTS

      CON(R4 =7373737373737373B,   R16=0070CCCCCC000000B)

* TAPE READING ROUTINE

1X    SLJ(N)              SLJ(L+5)          . EXIT/ENTRY
1ARG  ZRO(0)              ZRO(0)            . TAPE UNIT NUMBER ARG.
2ARG  ZRO(0)              ZRO(0)            . INITIAL ADDRESS
3ARG  ZRO(0)              ZRO(0)            . TERMINAL ADDRESS
4ARG  ZRO(0)              ZRO(0)            . MODE, 1 = BINARY, 2 = BCD
      LDA7(1ARG)          INA(-11B)         .
      SIU1(19X)           AJP3(L+3)         . CHECK FOR TU ASSIGNMENT
      ENA(T40)            SLJ4( G)          . GO PRINT ERROR
      SLJ( P)             ZRO(0)            .
      INA(11B)            STA(K0)           .
      LIL1(K0)            LDA1(KC)          .
      ADD7(4ARG)          SAU(4X)           . SET TU CONTROL CODES
      SCL(777B)           SAL(4X)           . INITIALIZE
      SAL(5X)             SAL(11X)          .
      INA(3)              SAU(8X)           .
      INA(2)              SAU(9X)           .
      INA(1)              SAU(11X)          .
      INA(1)              SAU(7X)           .
      LRS(18)             ENA(0)            .
      LLS(3)              SAL(2X)           .
      SAL(3X)             SAU(12X)          .
      LLS(39)             LDQ(R16)          .
      STA(K0)             LDA(5X)           .
      SSU(K0)             STA(5X)           .
      LDA7(2ARG)          SAU(5X)           .
      LDA(6X)             SSU(K0)           .
      STA(6X)             ENI(0)            .
2X    LDA7(3ARG)          SAL(N)            .
      SAU(6X)             SIL2(19X)         .
3X    ENI2(4)             LIL1(N)           .
4X    EXF(N)              EXF7(N)           . SELECT UNIT
5X    EXF(N)              EXF7(N)           . ACTIVATE CHANNEL
6X    EXF(N)              LDA7(2ARG)        .
      SUB(R4)             LLS(48)           .
      INI1(-1)            LDA1(Z)           .
      INI1(1)             SUB(R4)           .
7X    EXF7(N)             SLJ(15X)          . SENSE ENDFILE
8X    EXF7(N)             SLJ(L+4)          . SENSE PARITY ERROR
9X    EXF7(N)             SLJ(10X)          . SENSE LENGTH ERROR
      QJP1(19X)           AJP(3X)           . SENSE FOR BAD RECORD
      SLJ(19X)            ZRO(0)            . EXIT
      IJP2(L+2)           SLJ(14X)          . SENSE FIVE PARITY ERRORS
10X   IJP2(L+1)           SLJ(13X)          . SENSE FIVE LENGTH ERRORS
      AJP(3X)             QJP(3X)           . SENSE FOR BAD RECORD
11X   EXF(N)              EXF7(N)           . BACKSPACE
12X   LIL1(N)             SLJ(4X)           . RETURN TO REREAD
13X   ENA(T6)             SLJ(17X)          . SET TO INDICATE TROUBLE
14X   ENA(T9)             SLJ(17X)          .
15X   ENA(T12)            SLJ(18X)          .
17X   SLJ4( G)            ZRO(0)            . TROUBLE EXIT
      AJP(19X)            AJP3(3X)          . SENSE ACTION TO TAKE
      SLJ(11X)            ZRO(0)            .
18X   SLJ4( G)            ZRO(0)            . TROUBLE EXIT
      AJP(3X)             AJP3(3X)          . SENSE ACTION TO TAKE
      SLJ(11X)            ZRO(0)            .
19X   ENI1(N)             ENI2(N)           . RE-STORE INDEXES
      SLJ(1X)             ZRO(0)            .
      END
```

```
      PROGRAM PROMAG
      DIMENSION NDATA(864),DATE(100),H(1728),HONE(900),ITITLE(12),
     1HTWO(900),HTHRE(900),T(900)
      DO 5 J = 1,14
      READ 5,DATE(J)
    5 FORMAT(O16)
      CON(MASK = 00000000777777778)
      ENA(NDATA),INA(1).
      STA(INIT),INA(864).
      STA(ITERM),ENI(0).
    6 CALL READ(3,INIT,ITERM,1)
      DO 70 I = 1,11,2
      ADATE = DATE(I)
      BDATE = DATE(I+1)
      LDA(ADATE),SUB(NDATA +1),AJP1(6).
      LDA(BDATE),SUB(NDATA +2),AJP1(6).
      NBLOC = 0
   30 CALL READ(3,INIT,ITERM,1)
      ND = NDATA(3)
      LDA(ND),AJP0(10).
      K=0
      DO 40 J=1,864
      K=K+1
      INDATA = NDATA(J)
      LDA(INDATA),LDQ(MASK),ARS(24),STL(INLIST).
      H(K)=INLIST
      K=K+1
      LDA(INDATA),LDQ(MASK),STL(INLIST).
      SLS1(40).
   40 H(K)=INLIST
      AVE=0.
      DO 50 J =1,1728
      H(J)=(1024./H(J))*2348400.0
   50 AVE=H(J)+AVE
      AVE=AVE/1728.
      PRINT 26, AVE
C ZAPP FILTER
      NERR =  0
      AVE = 0.
      HBAR = 50950.0
      DO 51 J=1,1728
      DEV = ABSF(H(J)-HBAR)
      IF(DEV-200.) 51,52,52
   52 NERR = NERR + 1
      IF(J-3) 53,53,54
   53 H(J) = H(J+3)
      GO TO 51
   54 H(J) = H(J-3)
   51 AVE = AVE + H(J)
      AVE = AVE/1728.
      PRINT 26, AVE
      PRINT 27, NERR
      NBLOC = NBLOC + 1
      WRITE TAPE 2, H
      GO TO 30
   10 REWIND 2
      NPTS = (1728*NBLOC)/2700
      PRINT 27,NPTS
      READ TAPE 2, H
      K = 1
      TIME = -6.5/900.
      M=1
C THIS SECTION COMPUTES H VS TIME
      DO 60 L=1,900
      HONE(L)=(H(K)+H(K+3)+H(K+6))/3.
      HTWO(L)=(H(K+1)+H(K+4)+H(K+7))/3.
      LCOUNT=L
      HTHRE(L)=(H(K+2)+H(K+5)+H(K+8))/3.
      TIME = TIME + 6.5/900.
      T(L) = TIME
      K = K + 3*NPTS
      MAX = K+8
      IF(MAX - 1728) 60,60,80
   80 K=1
      IF(M-NBLOC) 85,95,95
   85 READ TAPE 2,H
      M=M+1
   60 CONTINUE
   95 PRINT 97,LCOUNT
      PRINT 97,M
      AT = 4.*3.1416/100.
      REWIND 2
      WRITE TAPE 2, HONE
      WRITE TAPE 2, HTWO
      WRITE TAPE 2, HTHRE
```

```
      HONEAV=0.
      HTWOAV=0.
      HTHREAV=0.
      DO 48 L=1,900
      HONEAV=HONEAV+HONE(L)
      HTWOAV=HTWOAV+HTWO(L)
   48 HTHREAV=HTHREAV+HTHRE(L)
      HONEAV=HONEAV/900.
      HTWOAV=HTWOAV/900.
      HTHREAV=HTHREAV/900.
      PRINT 49,HONEAV,HTWOAV,HTHREAV
   49 FORMAT(3E20.7)
      PRINT 27,NBLOC
   27 FORMAT(I7)
      HONEAV= (HONEAV +HTWOAV +HTHREAV)/3.
      PRINT 26,HONEAV
   26 FORMAT(E20.7)
      DO 90 L=1,900
      HONE(L) = HONE(L) - HONEAV
      HTWO(L) = HTWO(L) - HONEAV
   90 HTHRE(L) = HTHRE(L) - HONEAV
      DO 1 L=1,12
    1 ITITLE(L) = 8H
      ITITLE(1)=8HANDERSON
      ITITLE(2)=8H BOX 263
      ITITLE(7)=8H EARTHS
      ITITLE(8)=8HMAGNETIC
      ITITLE(9)=8H FIELD V
      ITITLE(10)=8HS TIME
      ITITLE(11)=8HT IN HRS
      ITITLE(12)=8H H GAMMA
      LABA=4H H1
      LABB=4H H2
      LABC=4H H3
      CALL DRAW(900,T,HONE,1,0,LABA,ITITLE,1.0,10.0,5,1,2,2,8,10,0,LAST)
      CALL DRAW(900,T,HTWO,2,0,LABB,ITITLE,1.0,10.0,5,1,2,2,8,10,0,LAST)
      CALL DRAW(900,T,HTHRE,3,0,LABC,ITITLE,1.0,10.,5,1,2,2,8,10,0,LAST)
      CALL SATGRAF(0,900,T,HONE,0,0,0,0)
      CALL SATGRAF(0,900,T,HTWO,0,0,0,0)
      CALL SATGRAF(0,900,T,HTHRE,0,0,0,0)
C THIS SECTION COMPUTES SIMPLE DIFF
      READ TAPE 2, HONE
      READ TAPE 2, HTWO
      READ TAPE 2, HTHRE
      REWIND 2
      DO 15 L=1,900
      H(L)=HONE(L)
      HONE(L)=H(L)-HTWO(L)
      STORE=HTWO(L)
      HTWO(L)=H(L)-HTHRE(L)
   15 HTHRE(L)=STORE-HTHRE(L)
      DO 16 L=1,12
   16 ITITLE(L)=8H
      ITITLE(1)=8HANDERSON
      ITITLE(2)=8H BOX 263
      ITITLE(7)=8HFIRST DI
      ITITLE(8)=8HFFERENCE
      ITITLE(9)=8H IN MAG
      ITITLE(10)=8HFIELD
      ITITLE(11)=8HT IN HRS
      ITITLE(12)=8H H GAMMA
      LABA=4HDEL1
      LABB=4HDEL2
      LABC=4HDEL3
      CALL DRAW(900,T,HONE,1,0,LABA,ITITLE,1.0,2.00,5,1,2,2,8,10,0,LAST)
      CALL DRAW(900,T,HTWO,2,0,LABB,ITITLE,1.0,2.00,5,1,2,2,8,10,0,LAST)
      CALL DRAW(900,T,HTHRE,3,0,LABC,ITITLE,1.0,2.0,5,1,2,2,8,10,0,LAST)
      CALL SATGRAF(0,900,T,HONE,0,0,0,0)
      CALL SATGRAF(0,900,T,HTWO,0,0,0,0)
      CALL SATGRAF(0,900,T,HTHRE,0,0,0,0)
   70 CONTINUE
      REWIND 3
      STOP
      END
      MACHINE READ(1ARG,2ARG,3ARG,4ARG)

* NOTE  G = ADDRESS OF ENTRY TO TYPEWRITER SENSE ROUTINE
*       P = ADDRESS OF PROGRAM CONTROL ROUTINE JUMP  ENTRY
* THIS ROUTINE IS FOR PROGRAM CALL
      LOC(G=31,  P=10)

* TYPEWRITER MESSAGE CODE TABLE
```

```
      CON(T12=45040412203022048,   T13=20062204032604268,
     *    T14=14112000000000008,   T15=45040431121401208,
     *    T40=45040401301520048,   T41=34061401040603018,
     *    T42=04140622141630018,   T43=20224200000000008)


* TAPE UNIT ASSIGNMENT TABLE
*      ASSIGNMENTS FOR CHANNEL 3/4 LIBRARY TAPE

      CON(K0 =0          ,  K1 =3320108,  K2 =3320208,
     *    K3 =3320308,  K4 =3320408,  K5 =5520108,
     *    K6 =5520208,  K7 =5520308,  K8 =5520408)


* ASSORTED CONSTANTS

      CON(R4 =73737373737373738,   R16=00700000000000008)


* TAPE READING ROUTINE

1X    SLJ(N)            SLJ(L+5)          . EXIT/ENTRY
1ARG  ZRO(0)            ZRO(0)            . TAPE UNIT NUMBER ARG.
2ARG  ZRO(0)            ZRO(0)            . INITIAL ADDRESS
3ARG  ZRO(0)            ZRO(0)            . TERMINAL ADDRESS
4ARG  ZRO(0)            ZRO(0)            . MODE, 1 = BINARY, 2 = BCD
      LDA7(1ARG)        INA(-11B)         .
      SIU1(19X)         AJP3(L+3)         . CHECK FOR TU ASSIGNMENT
      ENA(T40)          SLJ4( G)          . GO PRINT ERROR
      SLJ( P)           ZRO(0)            .
      INA(11B)          STA(K0)           .
      LIL1(K0)          LDA1(K0)          .
      ADD7(4ARG)        SAU(4X)           . SET TU CONTROL CODES
      SCL(777B)         SAL(4X)           . INITIALIZE
      SAL(5X)           SAL(11X)          .
      INA(3)            SAU(8X)           .
      INA(2)            SAU(9X)           .
      INA(1)            SAU(11X)          .
      INA(1)            SAU(7X)           .
      LRS(18)           ENA(0)            .
      LLS(3)            SAL(2X)           .
      SAL(3X)           SAU(12X)          .
      LLS(39)           LDQ(R16)          .
      STA(K0)           LDA(5X)           .
      SSU(K0)           STA(5X)           .
      LDA7(2ARG)        SAU(5X)           .
      LDA(6X)           SSU(K0)           .
      STA(6X)           ENI(0)            .
2X    LDA7(3ARG)        SAL(N)            .
      SAU(6X)           SIL2(19X)         .
3X    ENI2(4)           LIL1(N)           .
4X    EXF(N)            EXF7(N)           . SELECT UNIT
5X    EXF(N)            EXF7(N)           . ACTIVATE CHANNEL
6X    EXF(N)            LDA7(2ARG)        .
      SUB(R4)           LLS(48)           .
      INI1(-1)          LDA1(Z)           .
      INI1(1)           SUB(R4)           .
7X    EXF7(N)           SLJ(15X)          . SENSE ENDFILE
8X    EXF7(N)           SLJ(L+4)          . SENSE PARITY ERROR
9X    EXF7(N)           SLJ(10X)          . SENSE LENGTH ERROR
      QJP1(19X)         AJP(3X)           . SENSE FOR BAD RECORD
      SLJ(19X)          ZRO(0)            . EXIT
      IJP2(L+2)         SLJ(14X)          . SENSE FIVE PARITY ERRORS
10X   IJP2(L+1)         SLJ(13X)          . SENSE FIVE LENGTH ERRORS
      AJP(3X)           QJP(3X)           . SENSE FOR BAD RECORD
11X   EXF(N)            EXF7(N)           . BACKSPACE
12X   LIL1(N)           SLJ(4X)           . RETURN TO REREAD
13X   ENA(T6)           SLJ(17X)          . SET TO INDICATE TROUBLE
14X   ENA(T9)           SLJ(17X)          .
15X   ENA(T12)          SLJ(18X)          .
17X   SLJ4( G)          ZRO(0)            . TROUBLE EXIT
      AJP(19X)          AJP3(3X)          . SENSE ACTION TO TAKE
      SLJ(11X)          ZRO(0)            .
18X   SLJ4( G)          ZRO(0)            . TROUBLE EXIT
      AJP(3X)           AJP3(3X)          . SENSE ACTION TO TAKE
      SLJ(11X)          ZRO(0)            .
19X   ENI1(N)           ENI2(N)           . RE-STORE INDEXES
      SLJ(1X)           ZRO(0)            .
      END
      END
```



```
       .5143083E+05
       .5093095E+05
   29
       .5097462E+05
       .5002635E+05
```

APPENDIX IV

CIRCUIT DIAGRAMS	PAGE
POLARIZING AND DAMPING NETWORK	1
MAGNETOMETER PREAMP	2
MAGNETOMETER AMPLIFIER	3
RADAR GATE	4
CLOCK GATE AND GATE CONTROL	5
STORAGE RESET AND GATE DRIVER	6
TIMER	7
COUNTER START AND RESET	8
SIGNAL GATE AND GATE CONTROL	9
CLOCK FREQUENCY MULTIPLIER	10
COUNTER FLIP-FLOP AND GATE	11
MULTIPLEX PULSE GENERATOR	12
MULTIPLEX BLOCK DIAGRAM	13
ANALOG LADDER	14
OUTPUT AMPLIFIERS	15
PLUS AND MINUS 12 VOLT POWER SUPPLY	16
PLUS AND MINUS 4 VOLT POWER SUPPLY	17
PLUS 28 VOLT OSCILLATOR AND TIMER POWER SUPPLY	18
INTERFACE DRIVER AND AMPLIFIER	19
INTERFACE AND/OR GATES	20
INTERFACE FLIP-FLOP AND INVERTER	21

APPENDIX IV

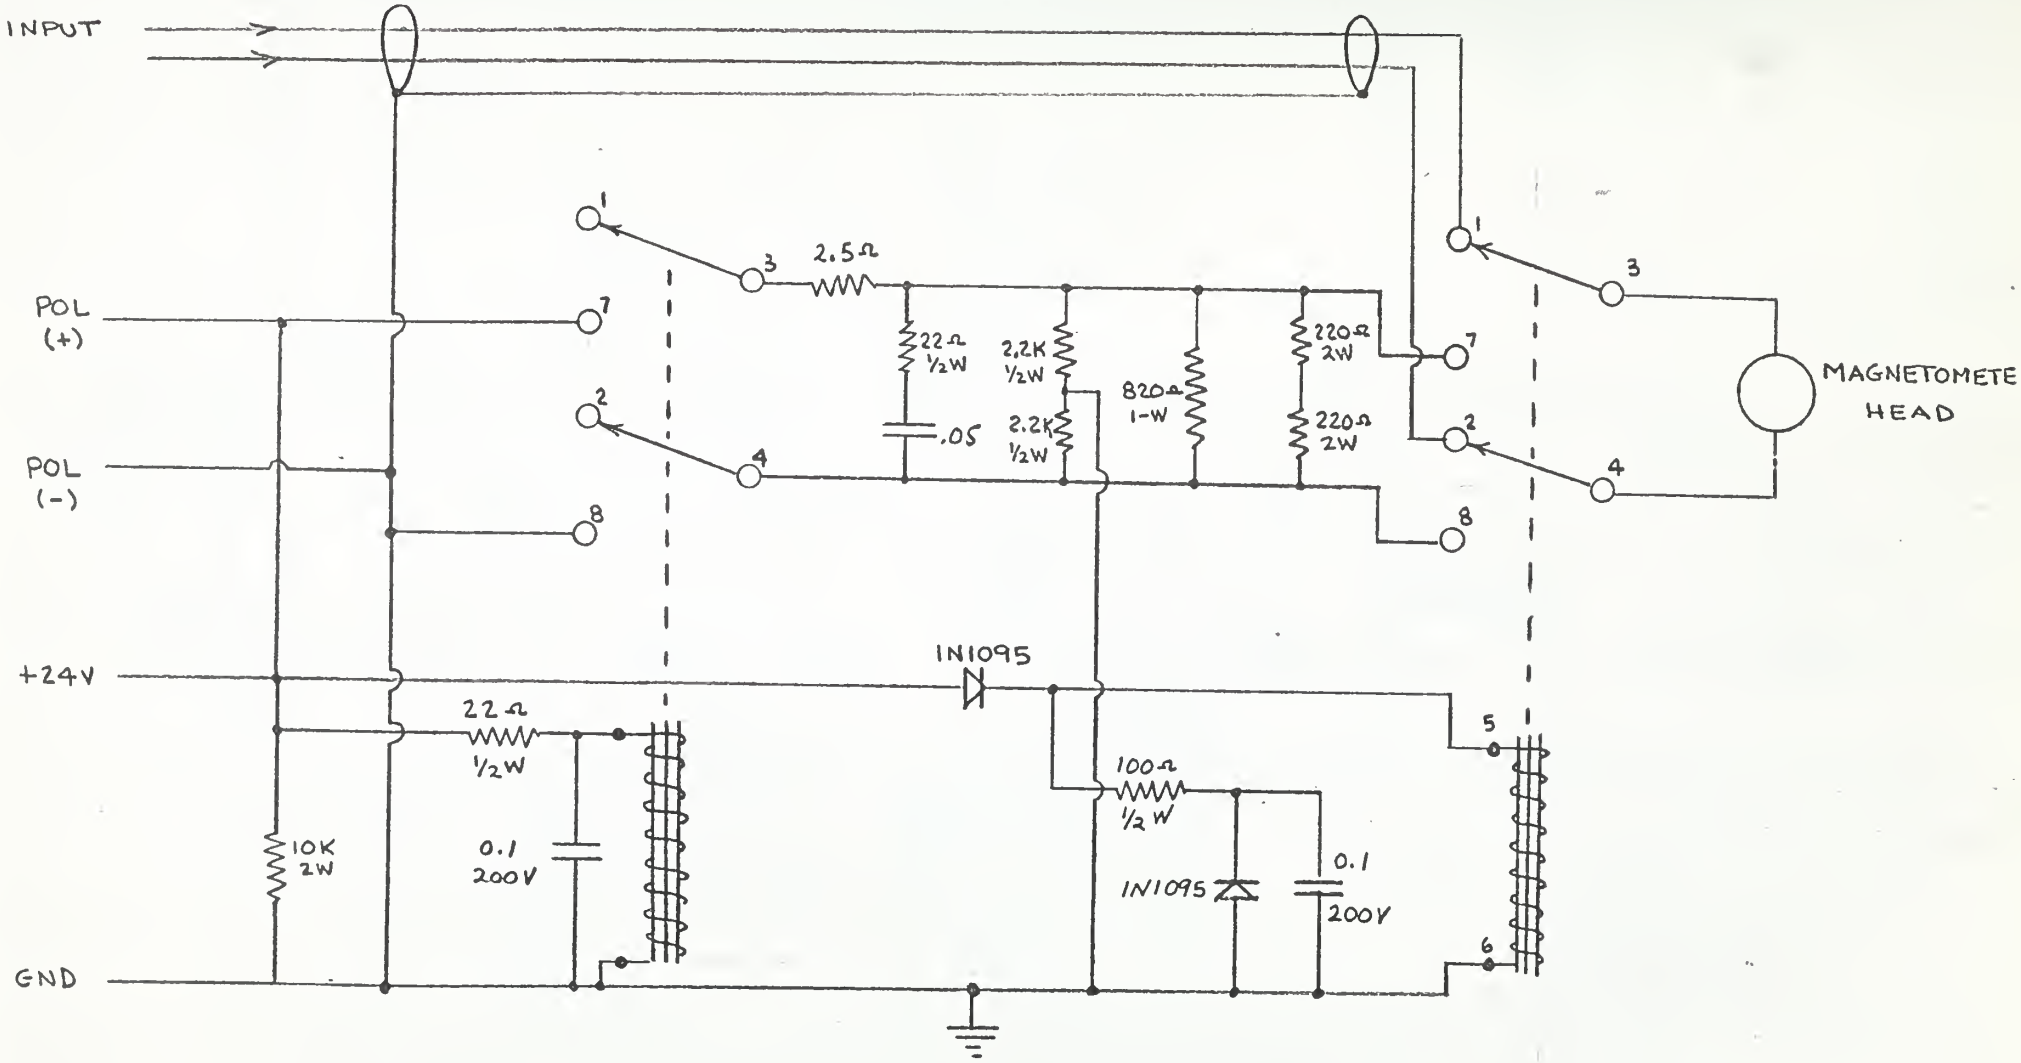
INPUT
POL (+)
POL (-)
+24V
GND
2.5Ω
22Ω ½W
.05
2.2K ½W
2.2K ½W
820Ω 1-W
220Ω 2W
220Ω 2W
MAGNETOMETER HEAD
IN1095
22Ω ½W
10K 2W
0.1 200V
100Ω ½W
IN1095
0.1 200V
1
2
3
4
5
6
7
8

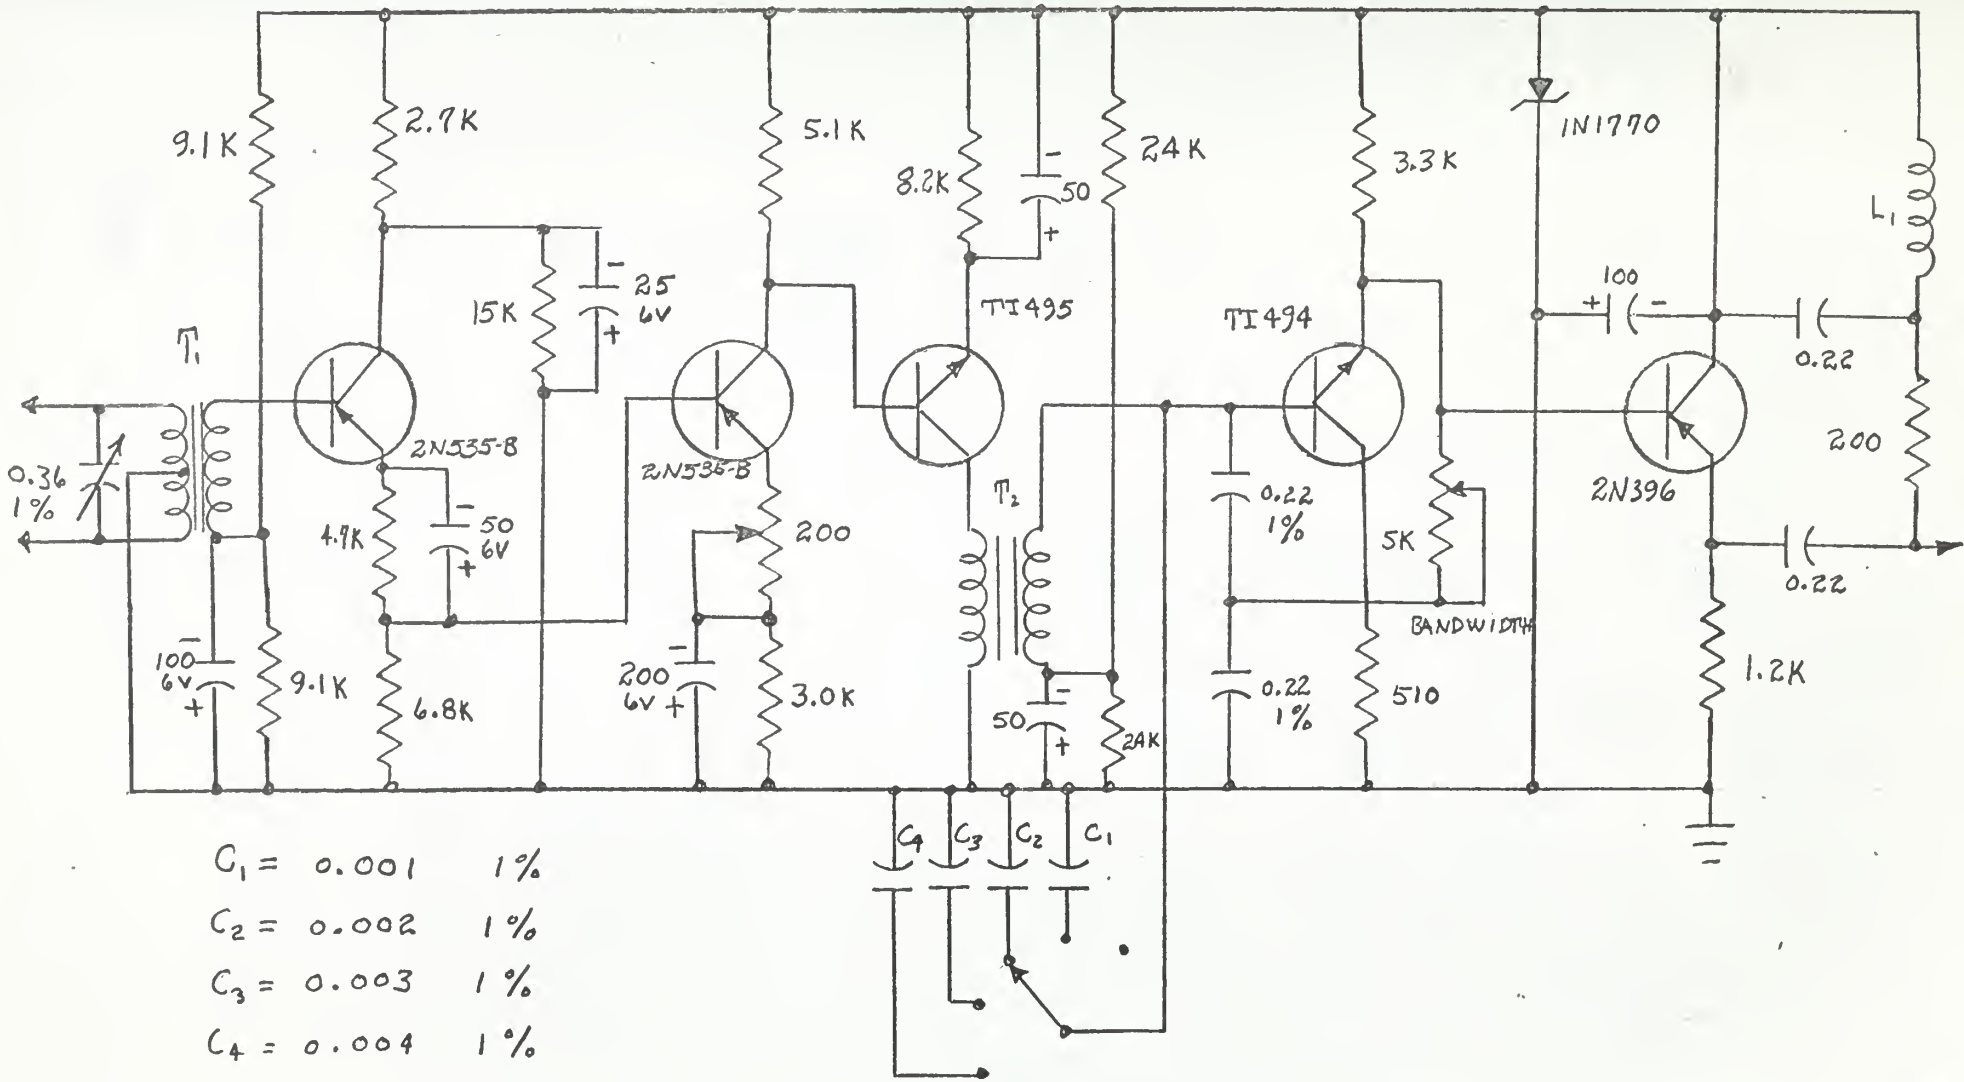

$C_1 = 0.001 \quad 1\%$

$C_2 = 0.002 \quad 1\%$

$C_3 = 0.003 \quad 1\%$

$C_4 = 0.004 \quad 1\%$

$L_1 = 24.4$ mh

$T_1 =$ 400 T (PRIMARY)
1400 T (SECONDARY)

$T_2 =$ 120 T (PRIMARY)
570 T (SECONDARY)

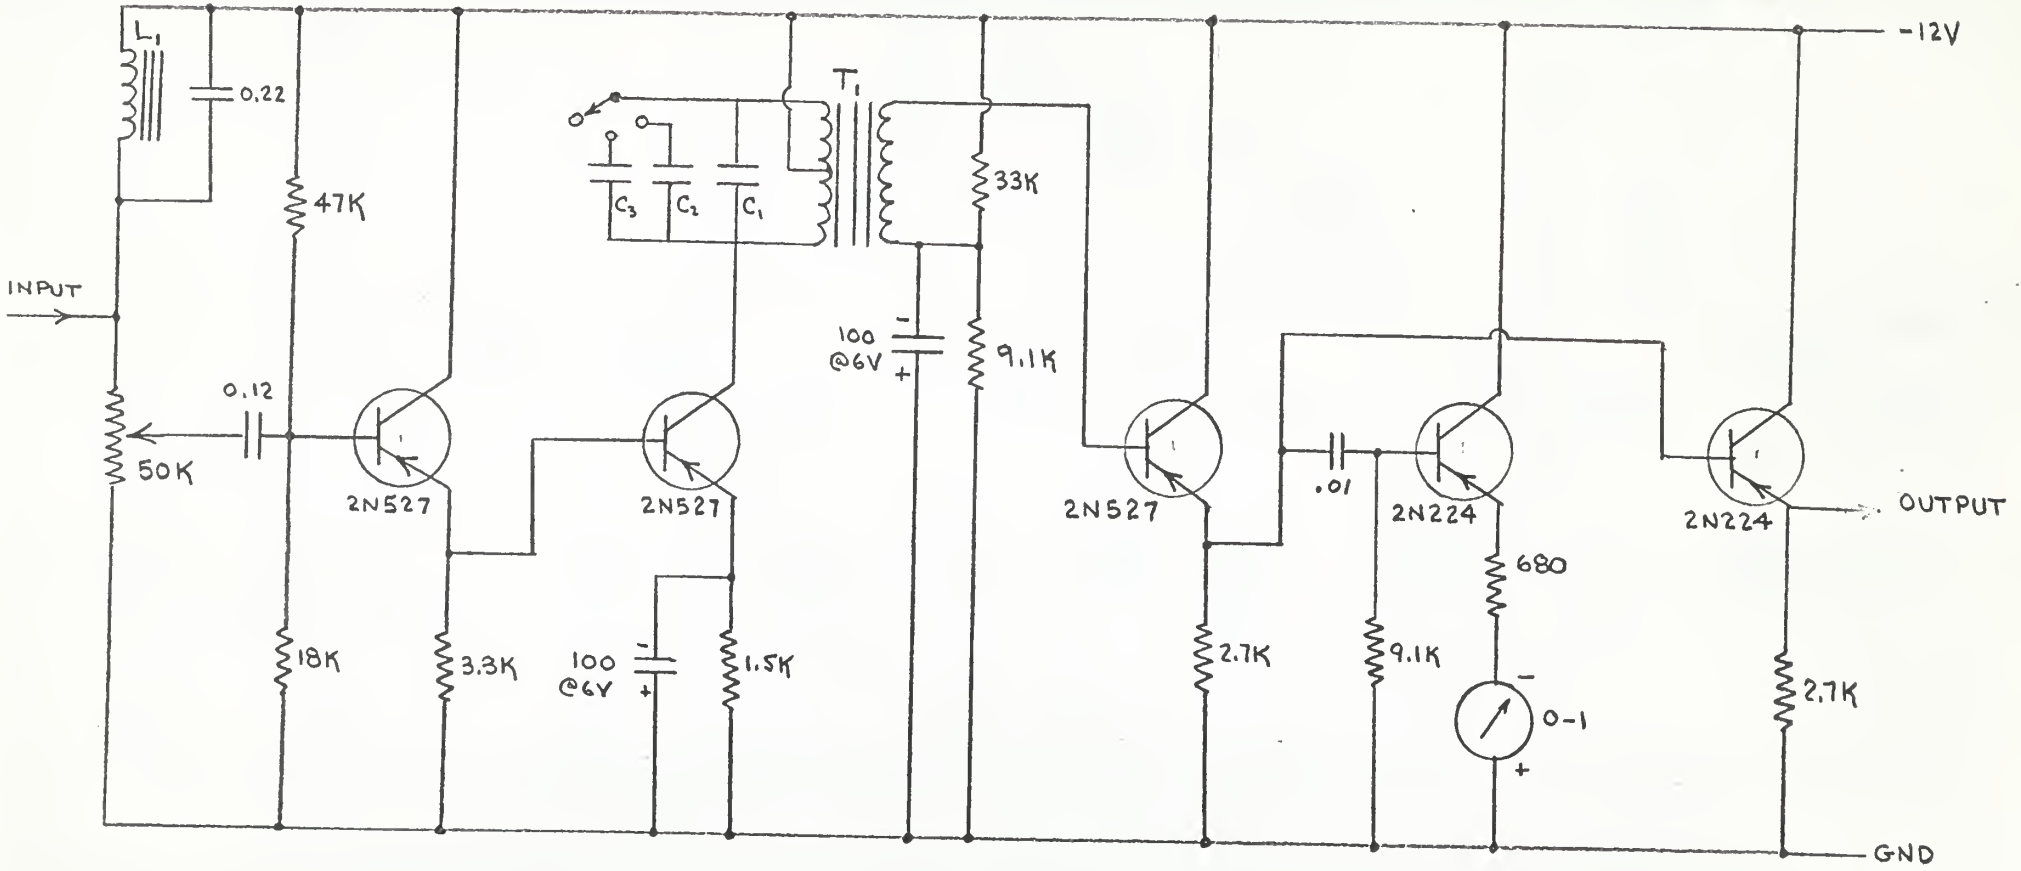
L1
0.22
47K
INPUT
0.12
50K
18K
2N527
3.3K
C3
C2
C1
T1
100
@6V
1.5K
2N527
33K
100
@6V
9.1K
2N527
2.7K
.01
2N224
680
9.1K
0-1
2N224
2.7K
-12V
OUTPUT
GND

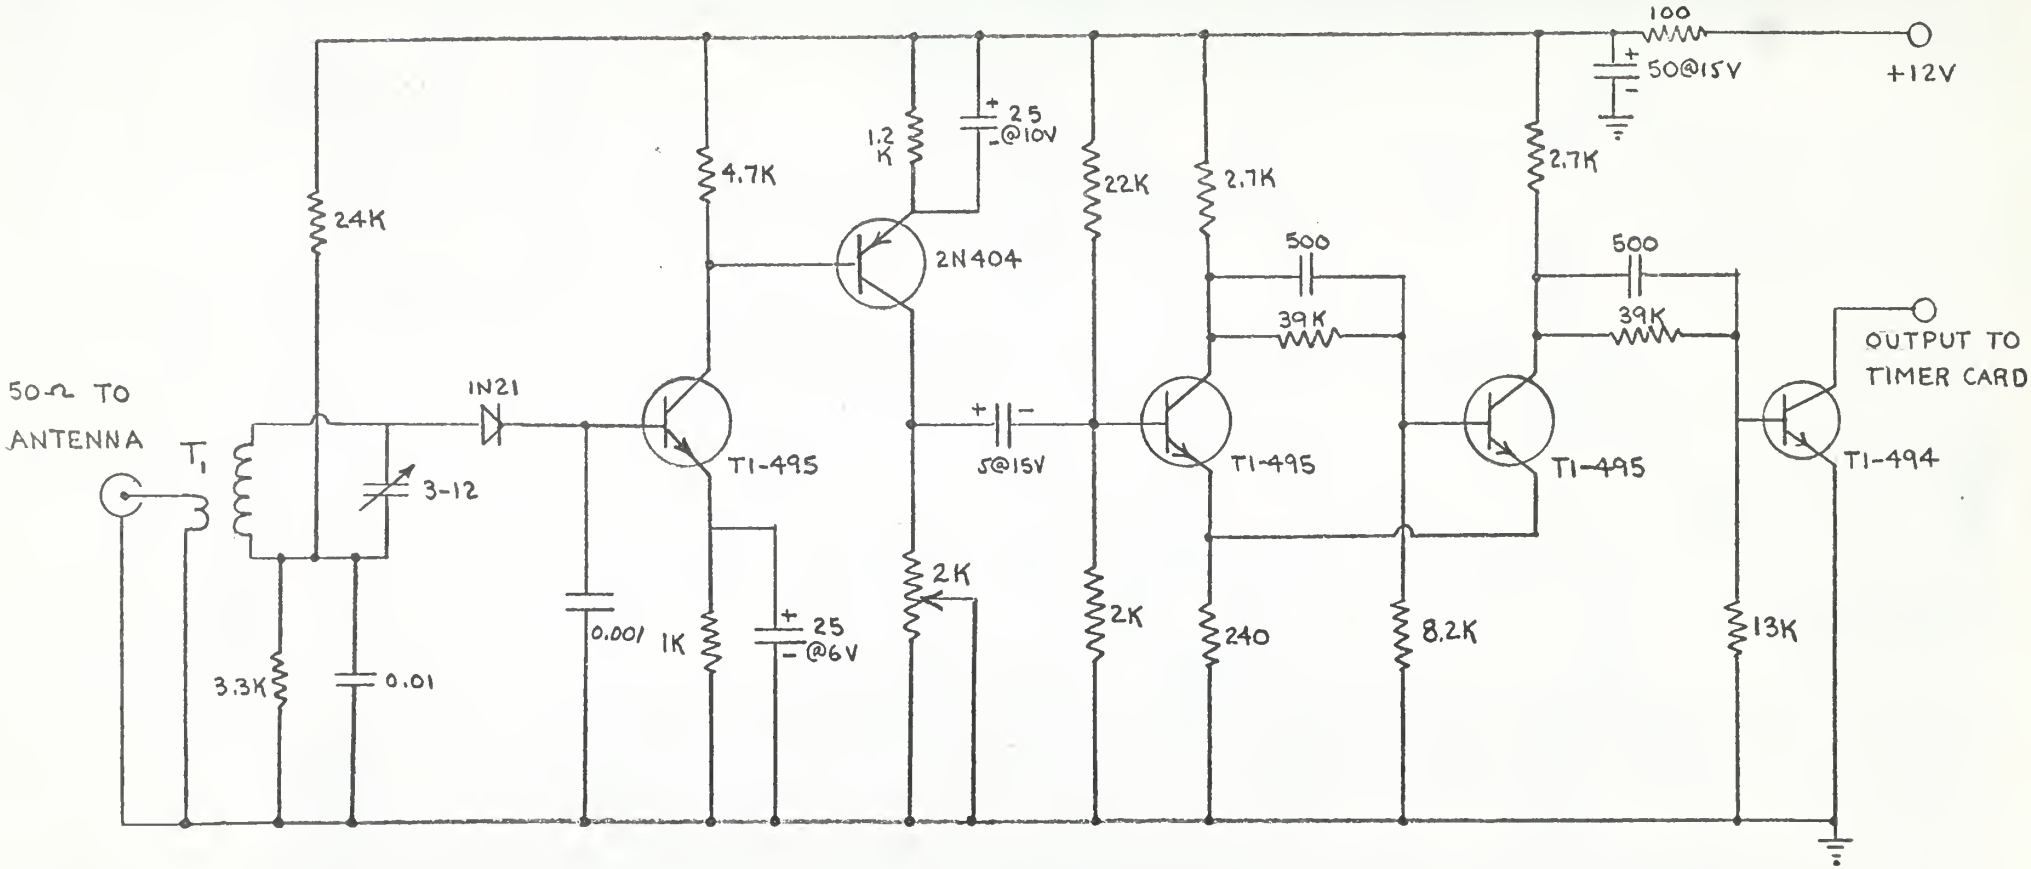
50Ω TO
ANTENNA
T1
3-12
3.3K
0.01
24K
IN21
0.001
1K
T1-495
4.7K
1.2
K
25
@10V
2N404
25
@6V
2K
5@15V
22K
2K
2.7K
500
39K
T1-495
240
8.2K
2.7K
500
39K
T1-495
13K
100
50@15V
+12V
OUTPUT TO
TIMER CARD
T1-494

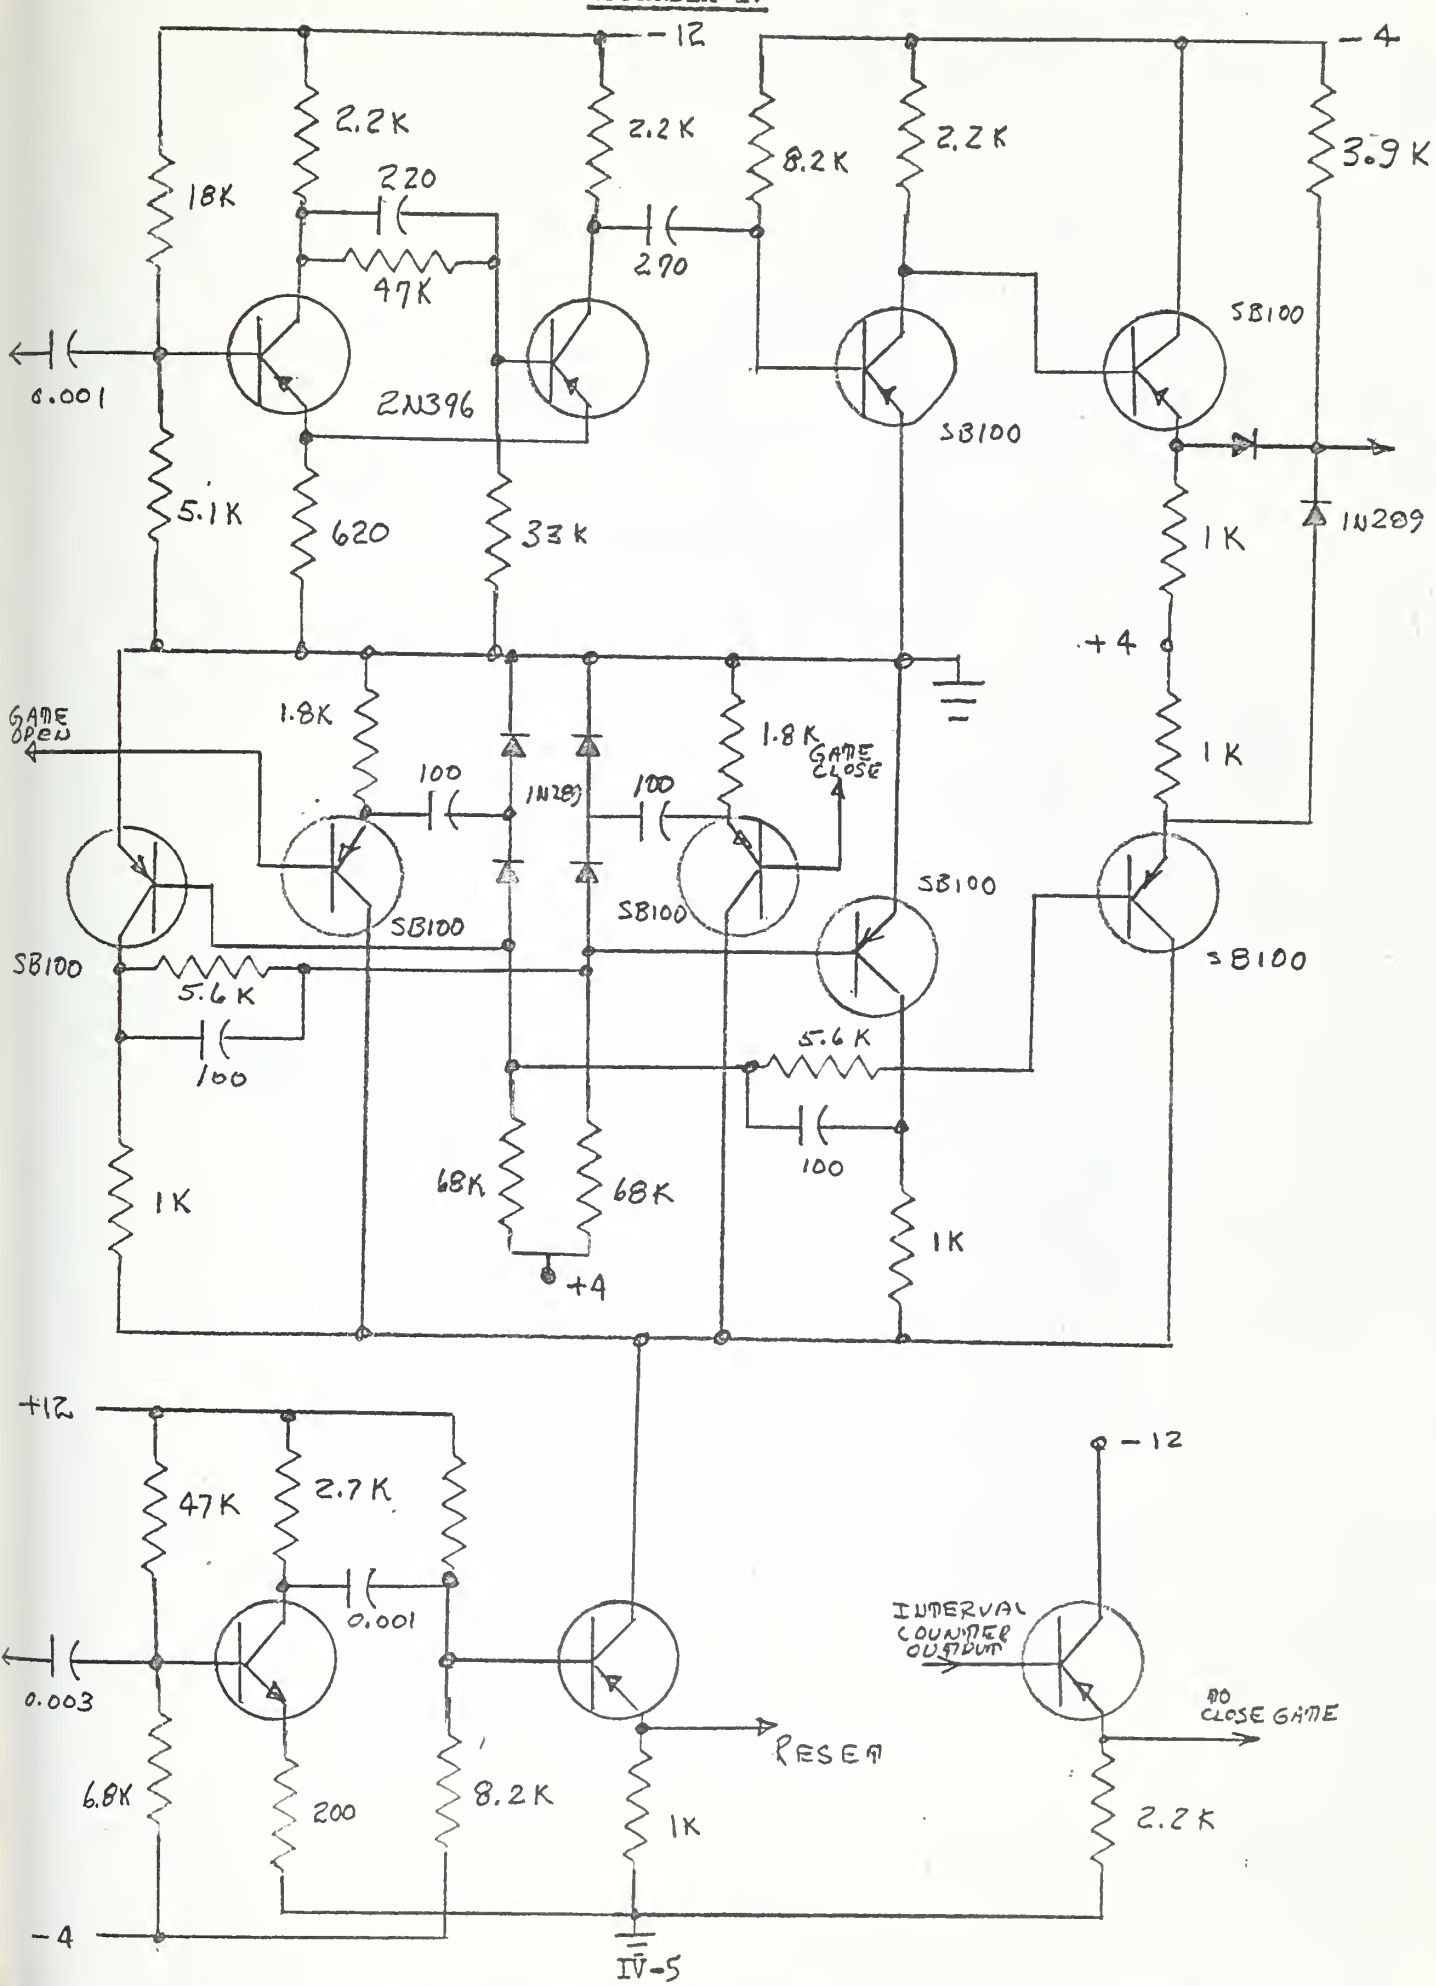
-12
-4
2.2K
2.2K
8.2K
2.2K
3.9K
18K
220
47K
270
0.001
2N396
SB100
SB100
SB100
5.1K
620
33K
1K
IN209
+4
GAME OPEN
1.8K
1.8K
GAME CLOSE
100
IN289
100
SB100
SB100
SB100
SB100
SB100
5.6K
100
5.6K
100
1K
68K
68K
1K
+4
+12
47K
2.7K
0.001
0.003
6.8K
200
8.2K
1K
RESET
-12
INTERVAL COUNTER OUTPUT
TO CLOSE GAME
2.2K
-4

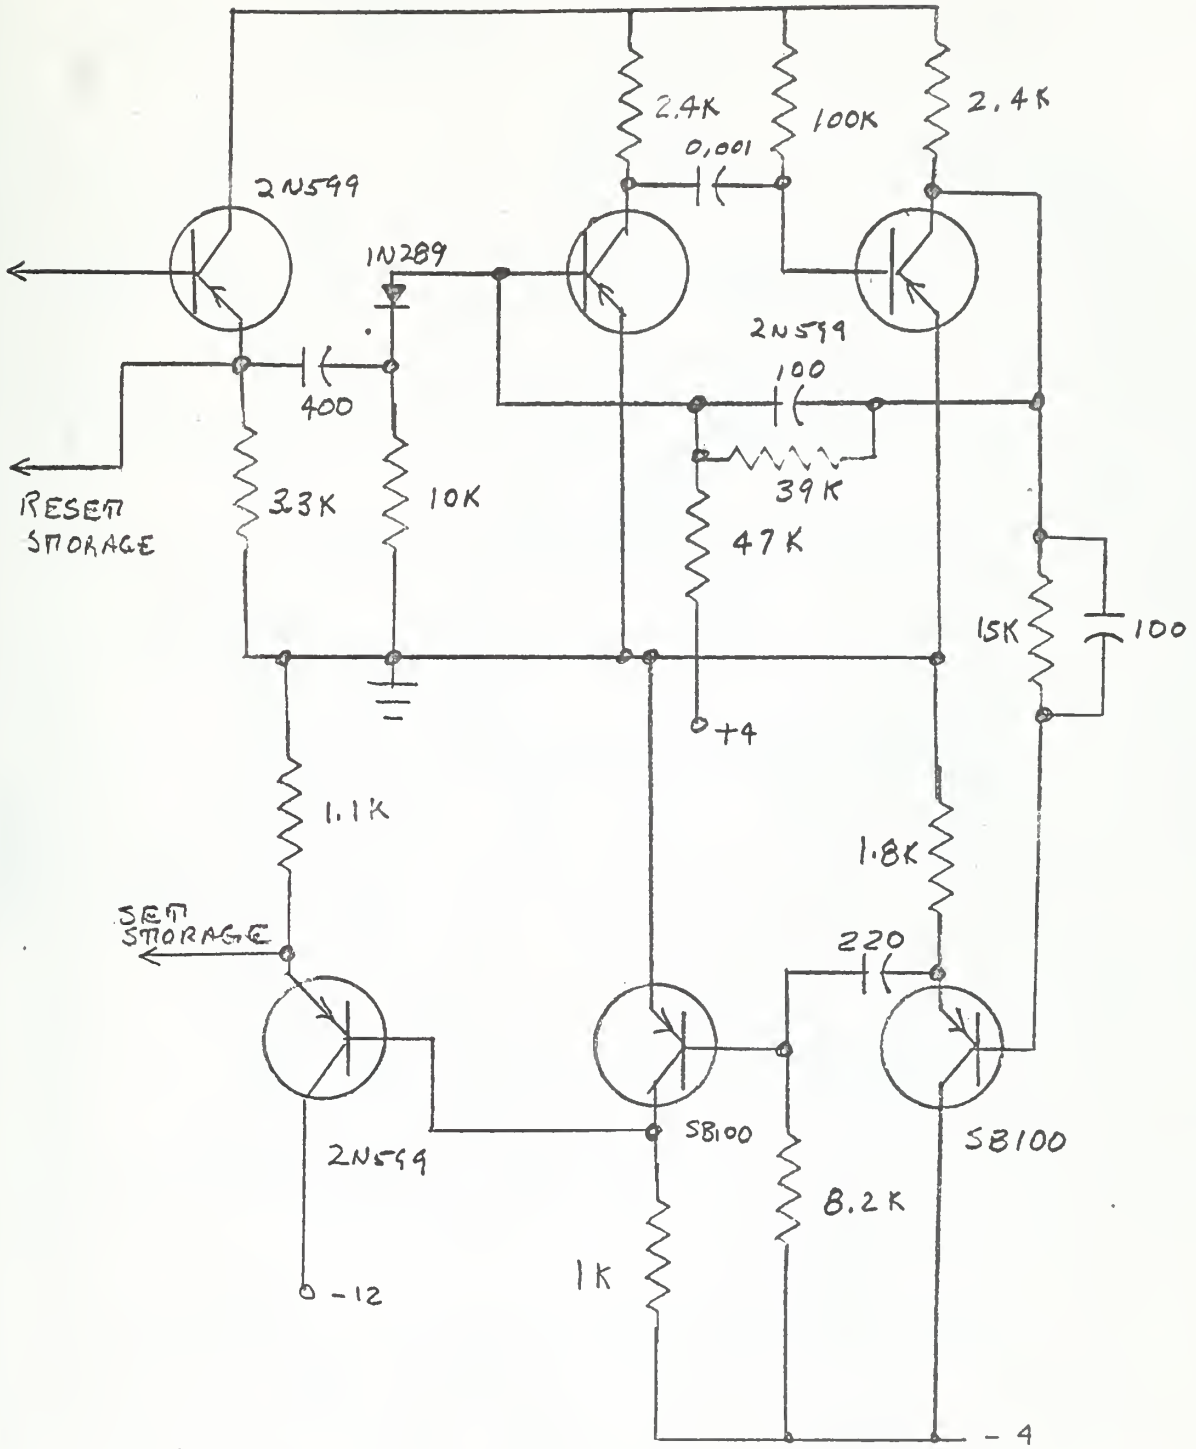
2.4K
100K
2.4K
0,001
2N599
1N289
2N599
100
400
RESET
STORAGE
33K
10K
39K
47K
15K
100
+4
1.1K
1.8K
SET
STORAGE
220
2N599
SB100
SB100
8.2K
1K
-12
-4

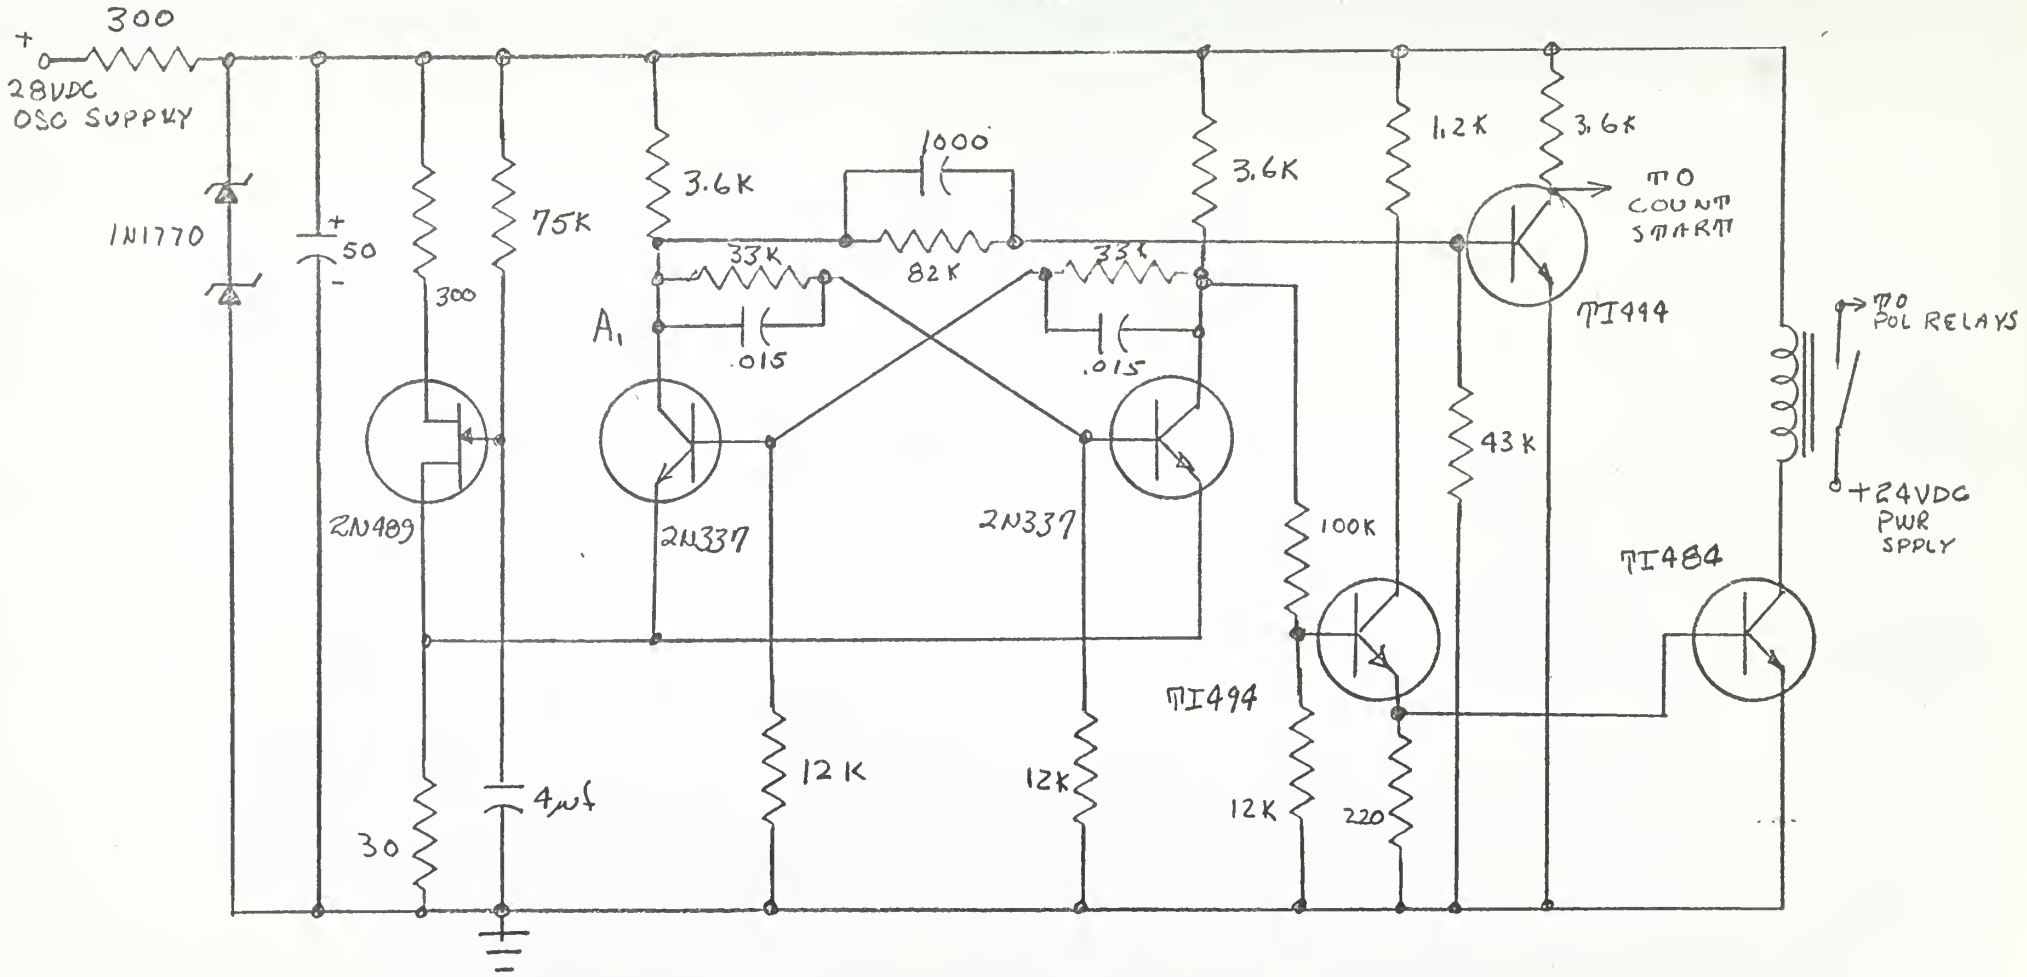
300
+
28VDC
OSC SUPPLY
IN1770
50
300
75K
3.6K
1000
82K
33K
.015
A1
33K
.015
3.6K
1.2K
3.6K
TO
COUNT
START
TI494
TO
POL RELAYS
+24VDC
PWR
SPPLY
43K
2N489
2N337
2N337
100K
TI484
TI494
12K
12K
12K
220
4μf
30

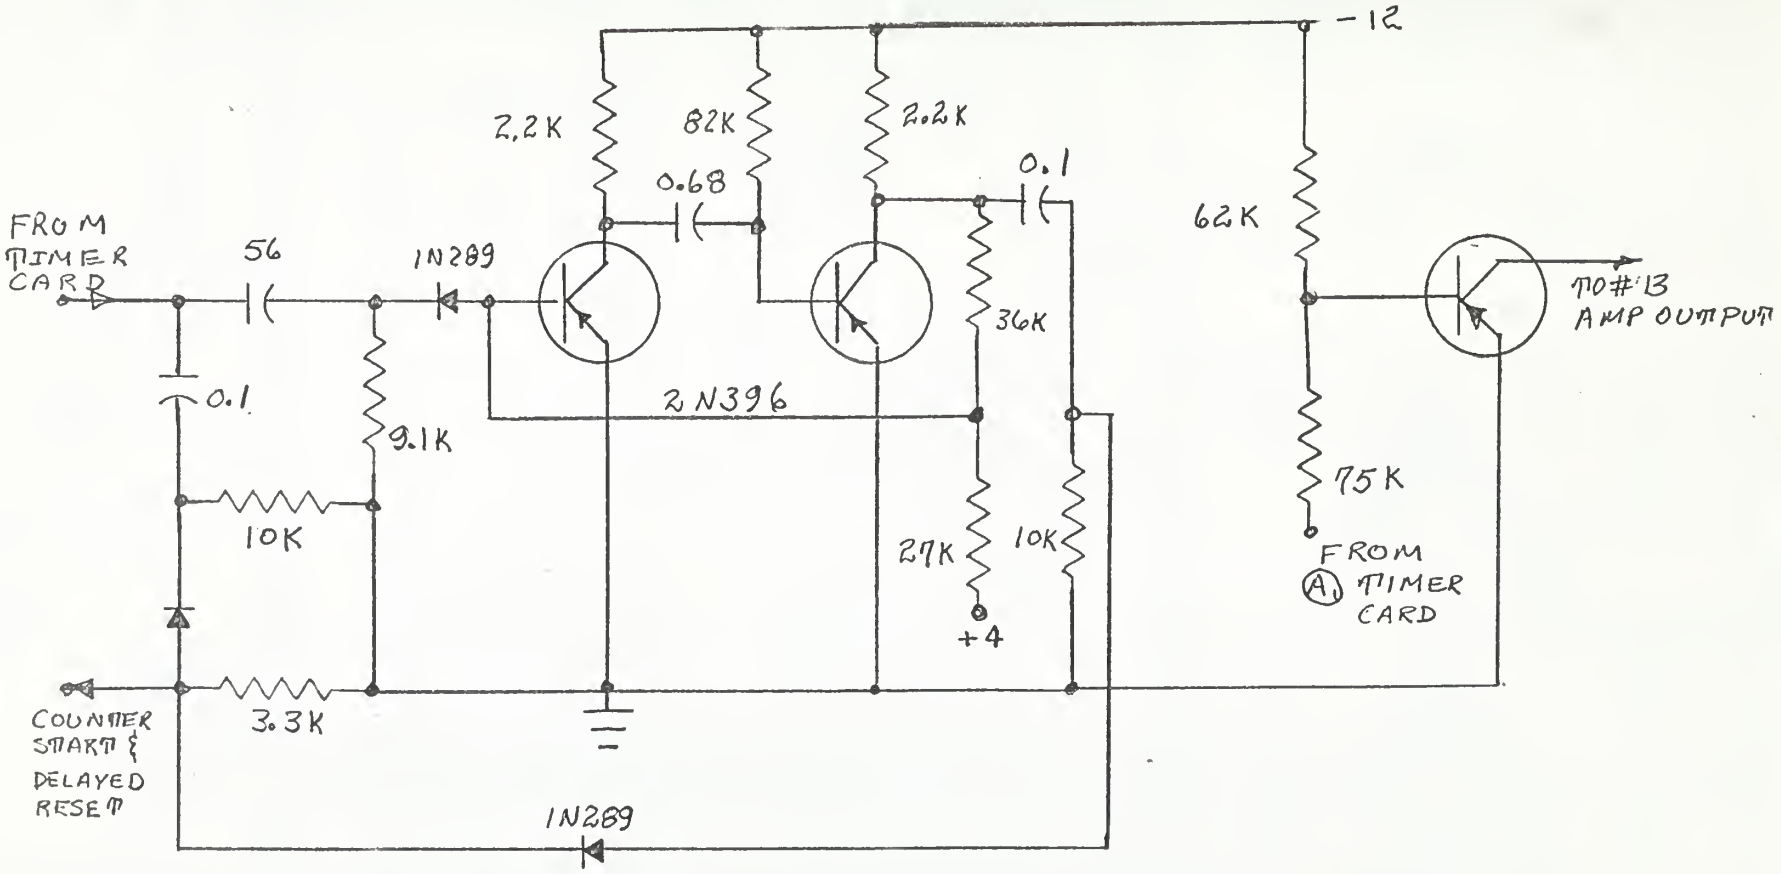
-12
2.2K
82K
2.2K
0.68
0.1
FROM TIMER CARD
56
IN289
62K
TO #13 AMP OUTPUT
36K
0.1
2N396
9.1K
10K
75K
27K
10K
FROM (A) TIMER CARD
+4
COUNTER START & DELAYED RESET
3.3K
IN289

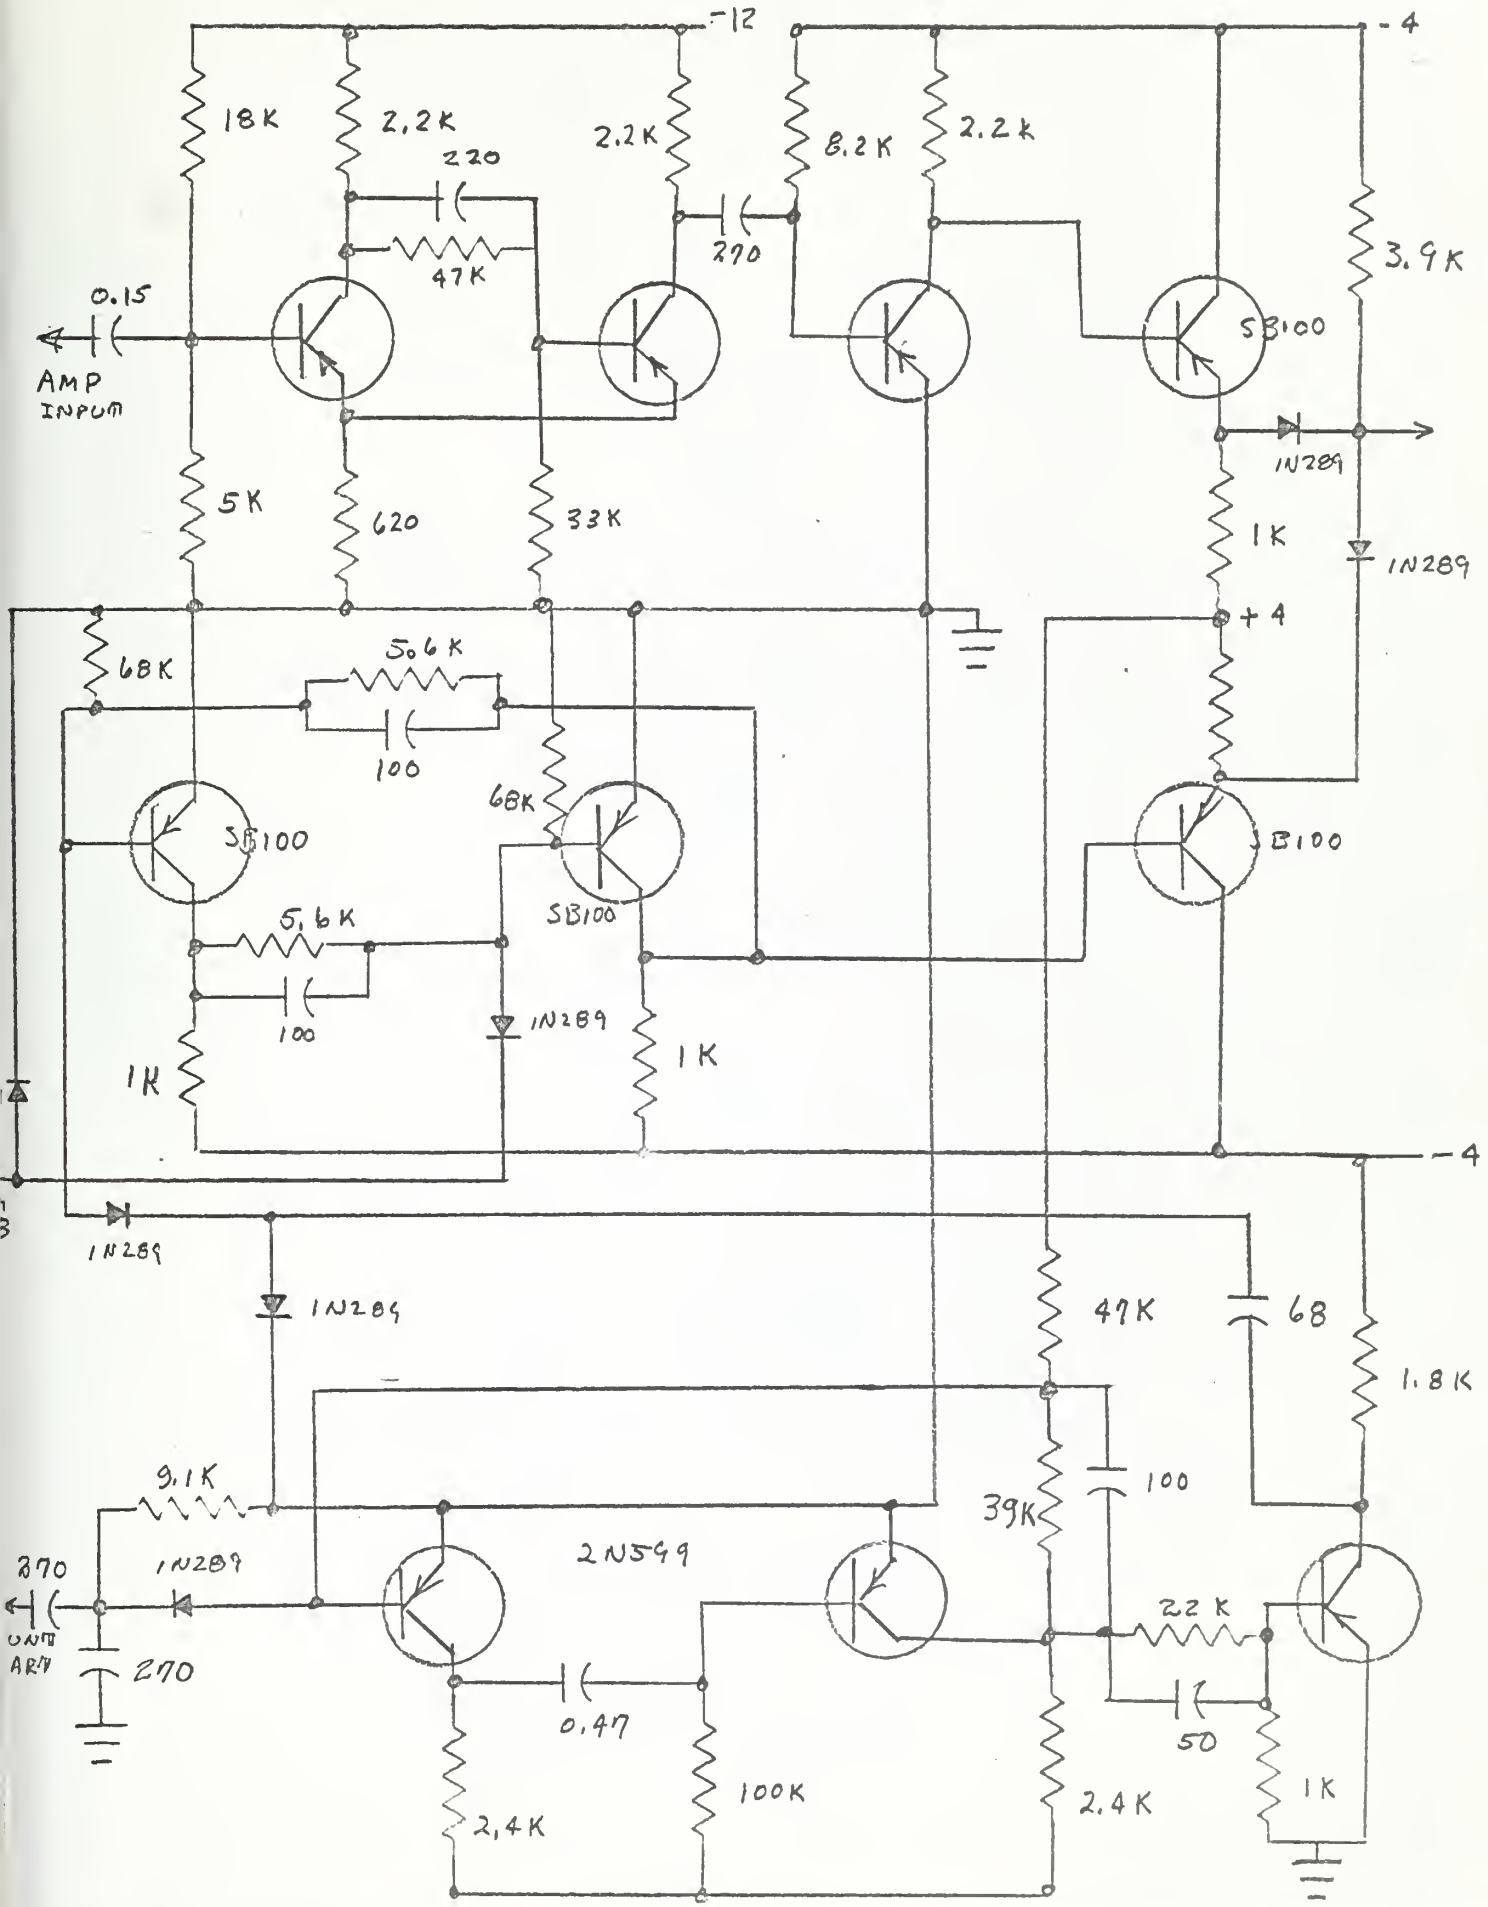
-12
-4
18K
2.2K
220
47K
2.2K
270
8.2K
2.2K
3.9K
0.15
AMP INPUT
SB100
IN289
5K
620
33K
1K
IN289
+4
68K
5.6K
100
68K
SB100
SB100
5.6K
100
IN289
1K
1K
-4
IN289
IN289
47K
68
1.8K
9.1K
100
39K
270
IN289
2N549
22K
OUTPUT
270
0.47
50
100K
2.4K
2.4K
1K

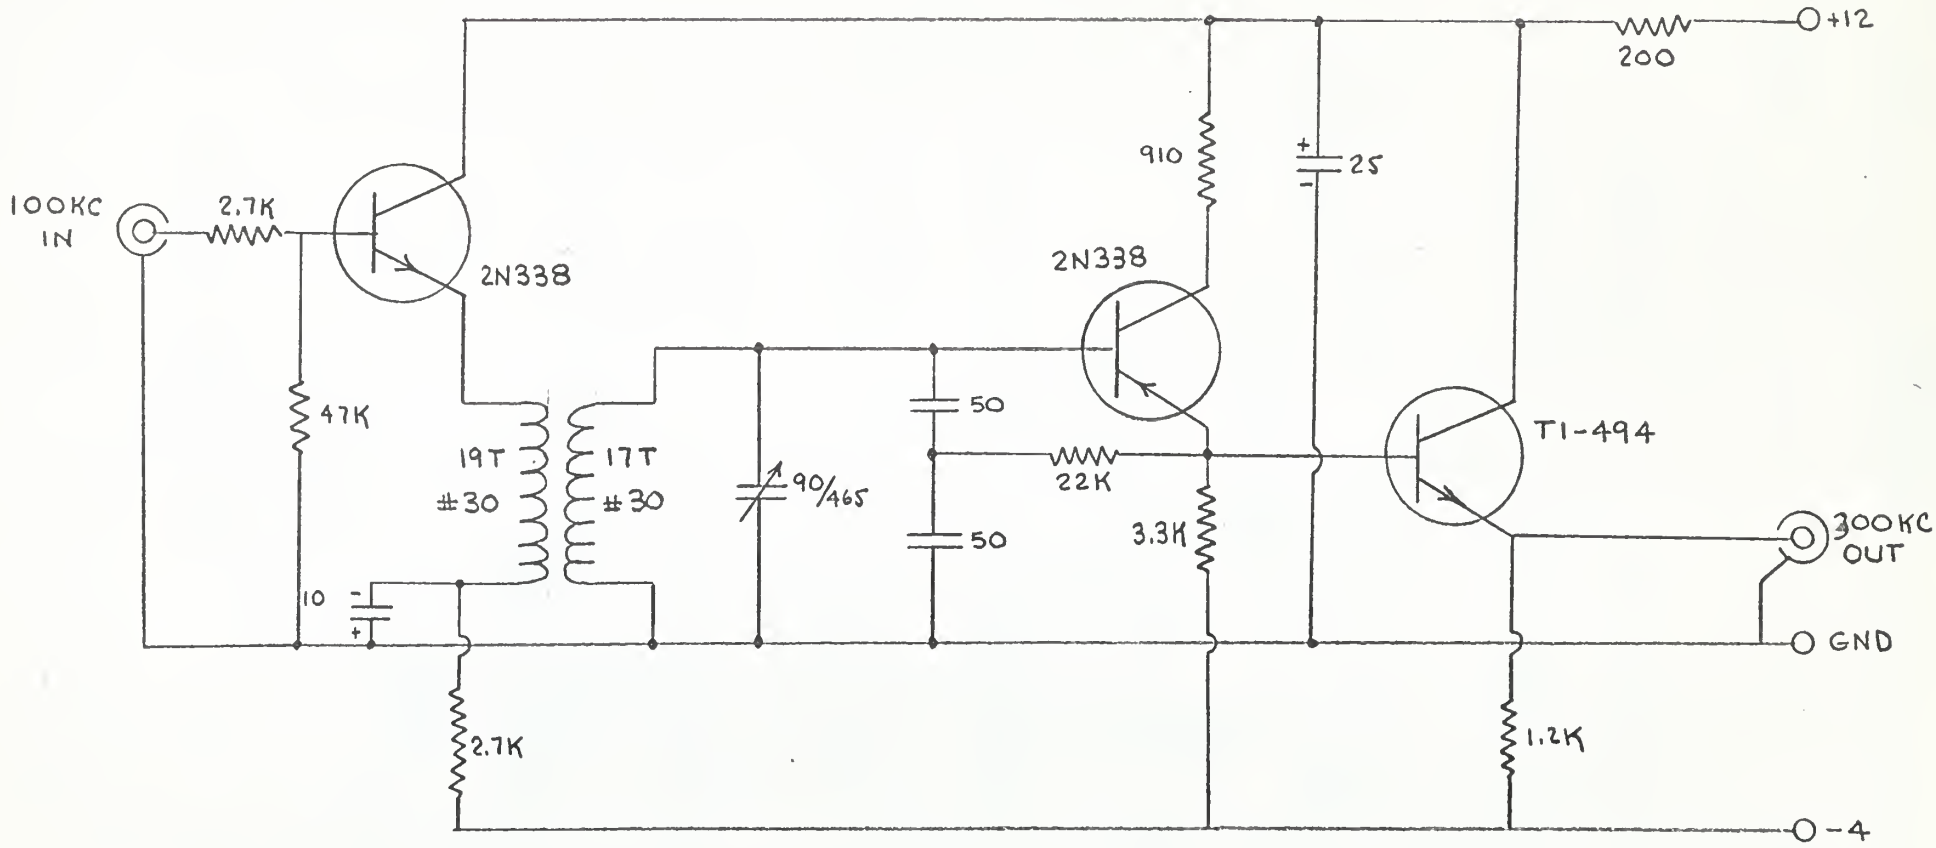
100KC
IN
2.7K
2N338
47K
19T
#30
17T
#30
90/465
50
50
2N338
910
25
200
+12
22K
3.3K
T1-494
300KC
OUT
GND
10
2.7K
1.2K
-4

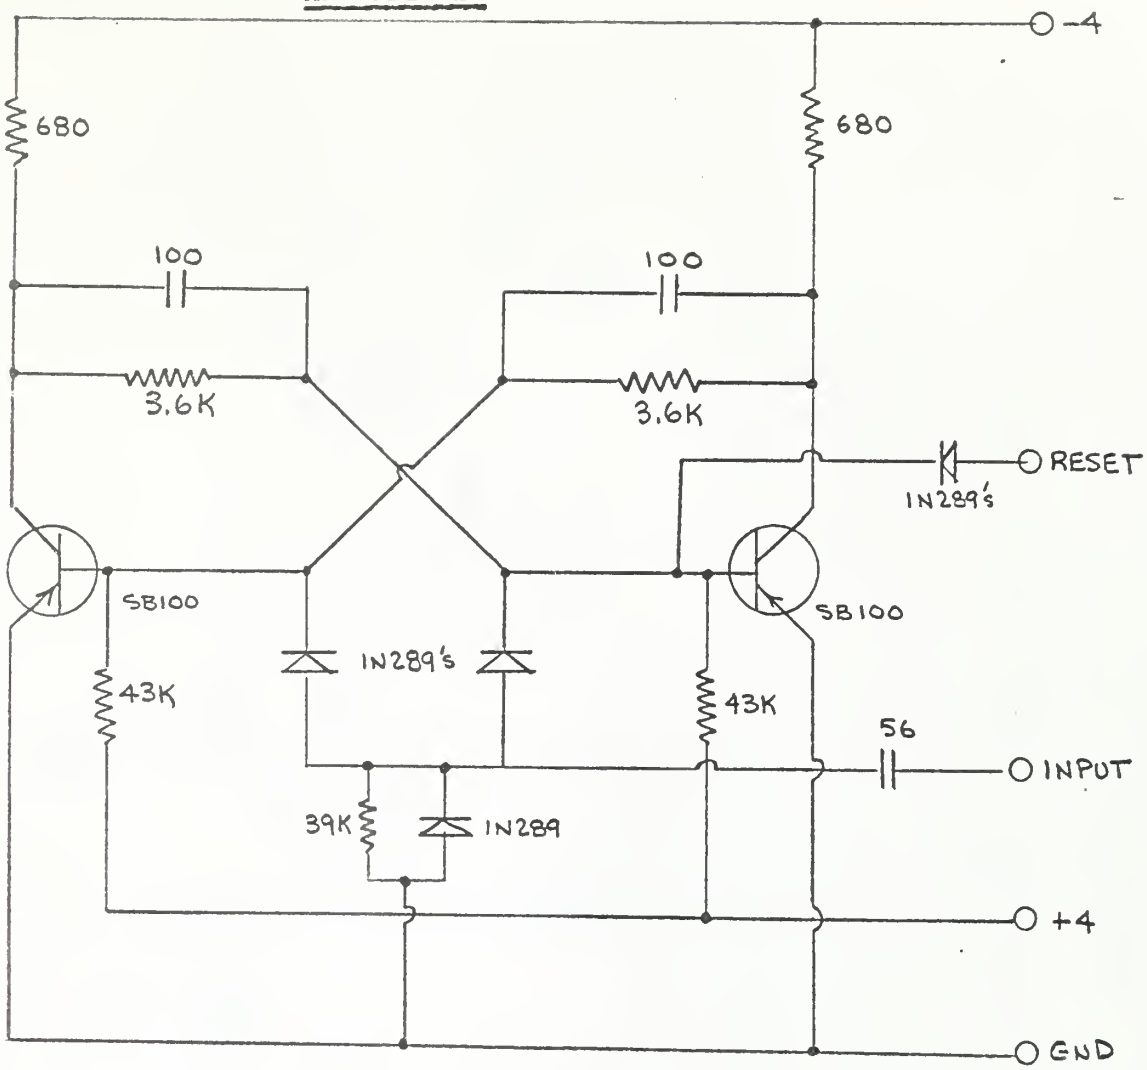
-4
680
680
100
100
3.6K
3.6K
RESET
IN289's
SB100
SB100
IN289's
43K
43K
56
INPUT
39K
IN289
+4
GND

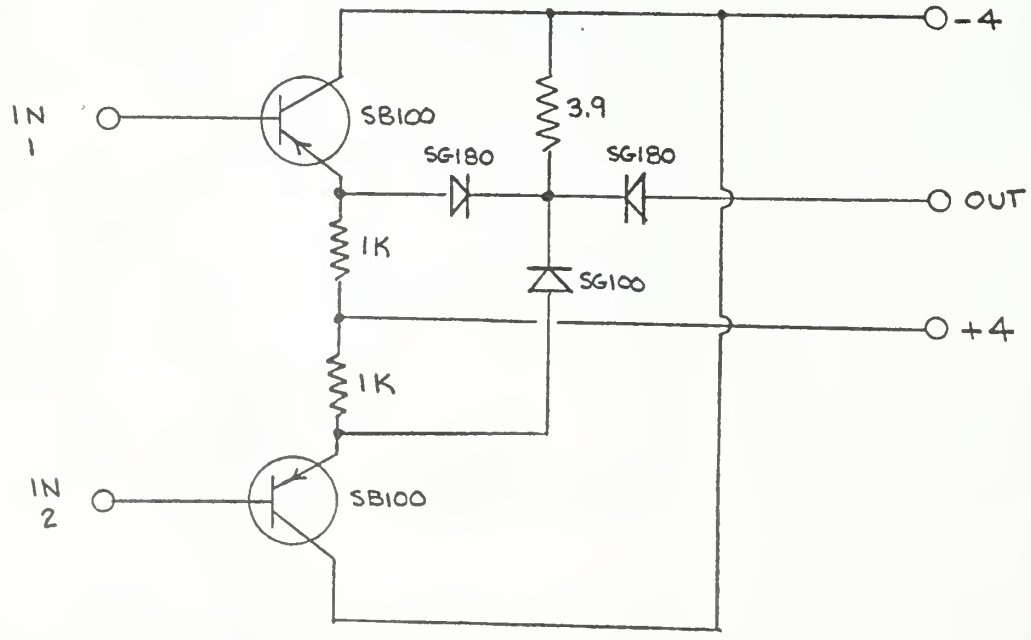
-4
IN 1
SB100
3.9
SG180
SG180
OUT
1K
SG100
+4
1K
IN 2
SB100

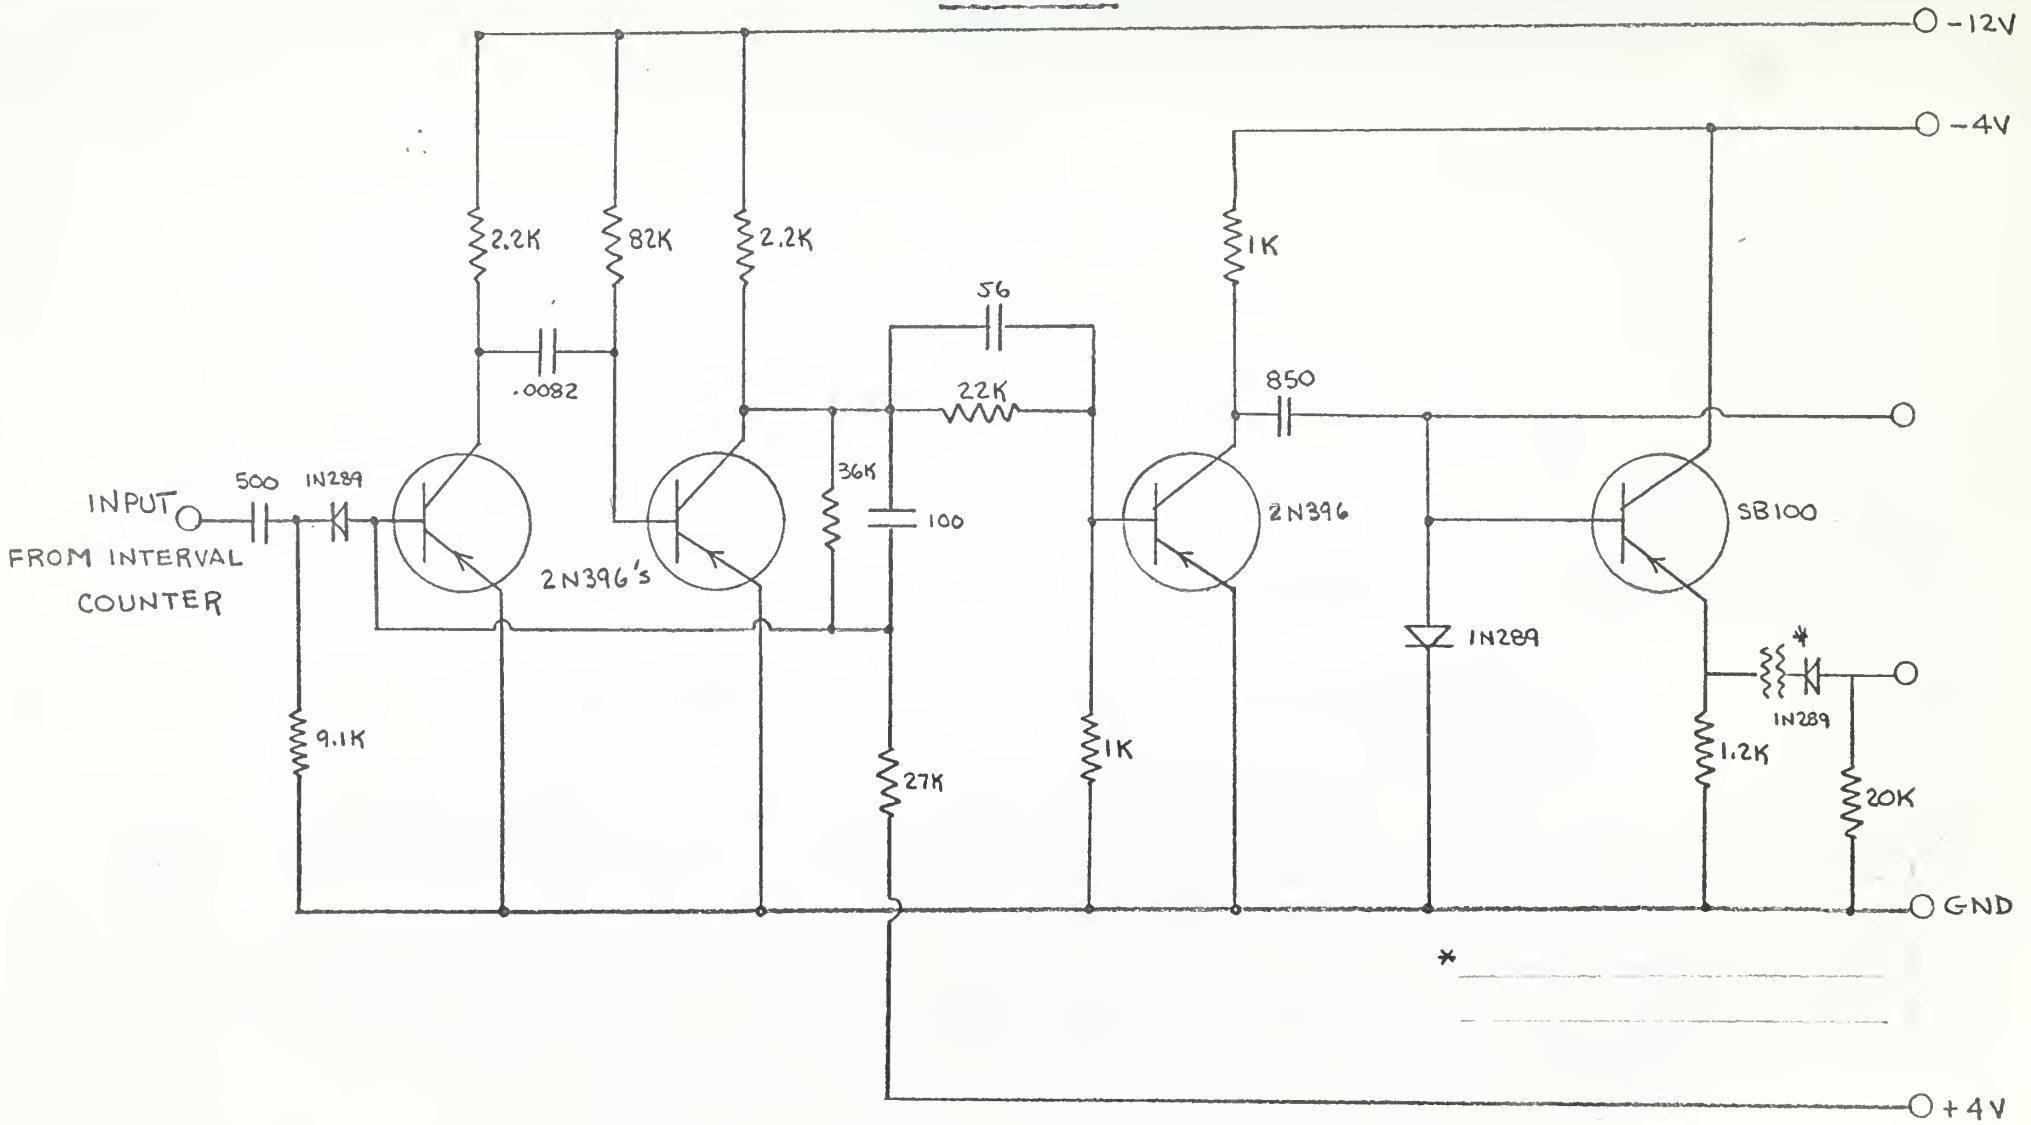
-12V
-4V
2.2K
82K
2.2K
1K
56
.0082
22K
850
INPUT
FROM INTERVAL
COUNTER
500
IN289
36K
100
2N396's
2N396
SB100
IN289
9.1K
27K
1K
1.2K
20K
GND
+4V

*

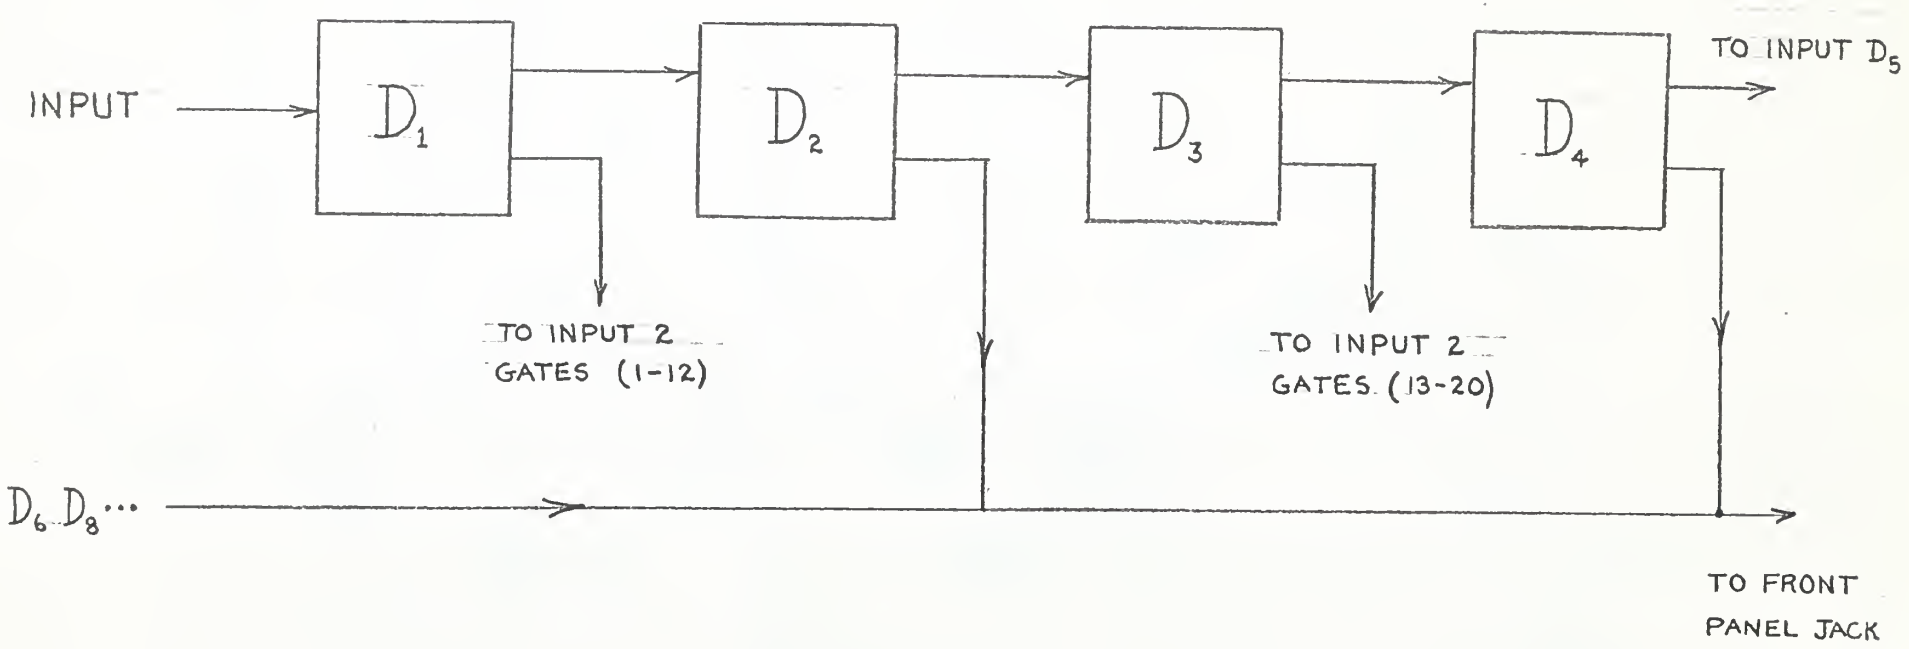
INPUT
D1
D2
D3
D4
TO INPUT D5
TO INPUT 2
GATES (1-12)
TO INPUT 2
GATES (13-20)
D6 D8 ...
TO FRONT
PANEL JACK

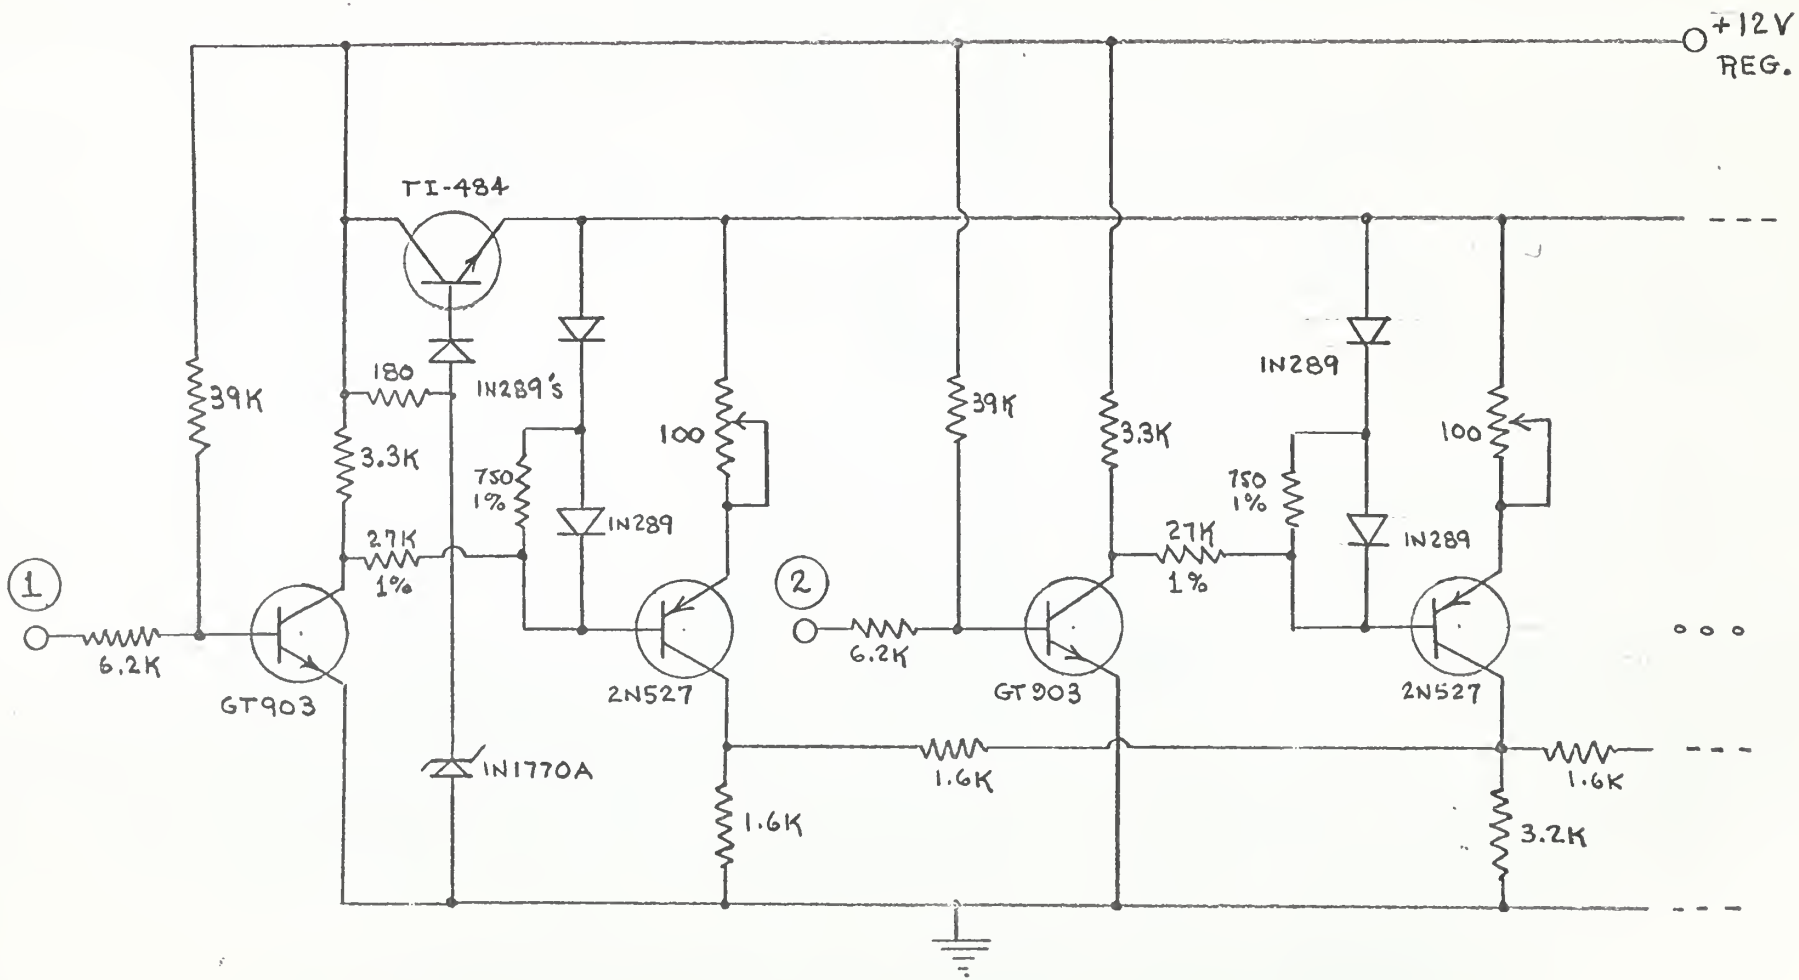
+12V
REG.
TI-484
180
IN289's
39K
3.3K
750
1%
IN289
100
27K
1%
1
6.2K
GT903
2N527
IN1770A
1.6K
2
39K
3.3K
IN289
750
1%
IN289
100
27K
1%
6.2K
GT903
2N527
1.6K
1.6K
3.2K

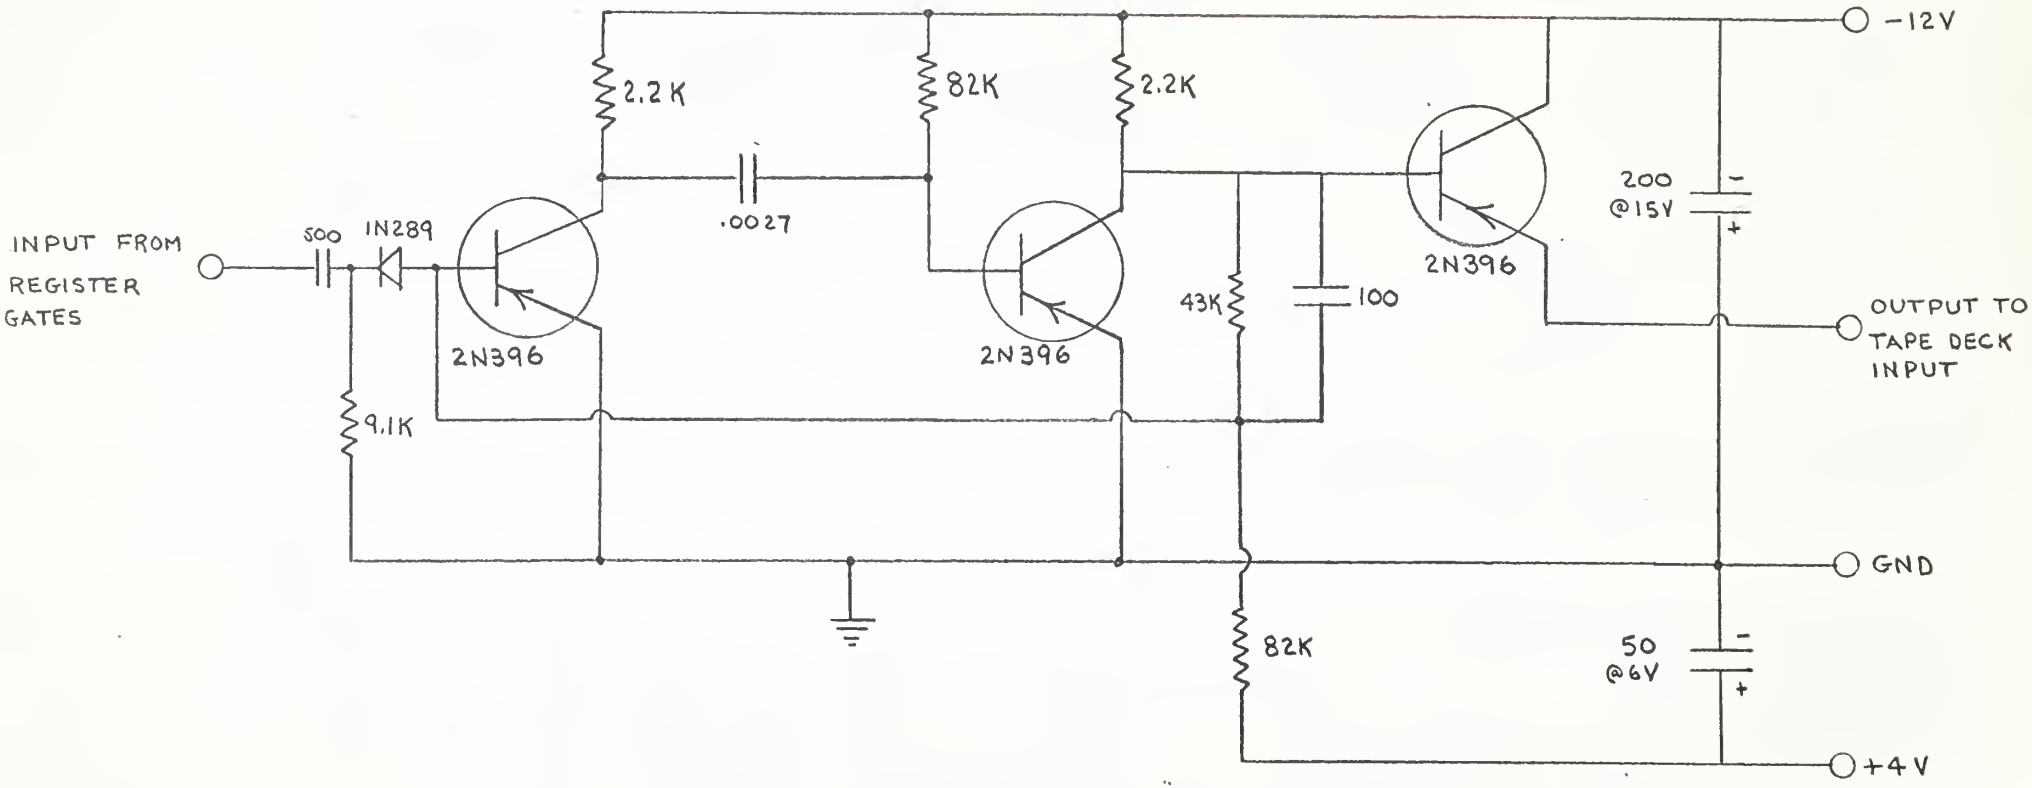
INPUT FROM
REGISTER
GATES
500
IN289
2.2K
.0027
82K
2.2K
2N396
2N396
2N396
9.1K
43K
100
200
@15V
-12V
OUTPUT TO
TAPE DECK
INPUT
GND
82K
50
@6V
+4V

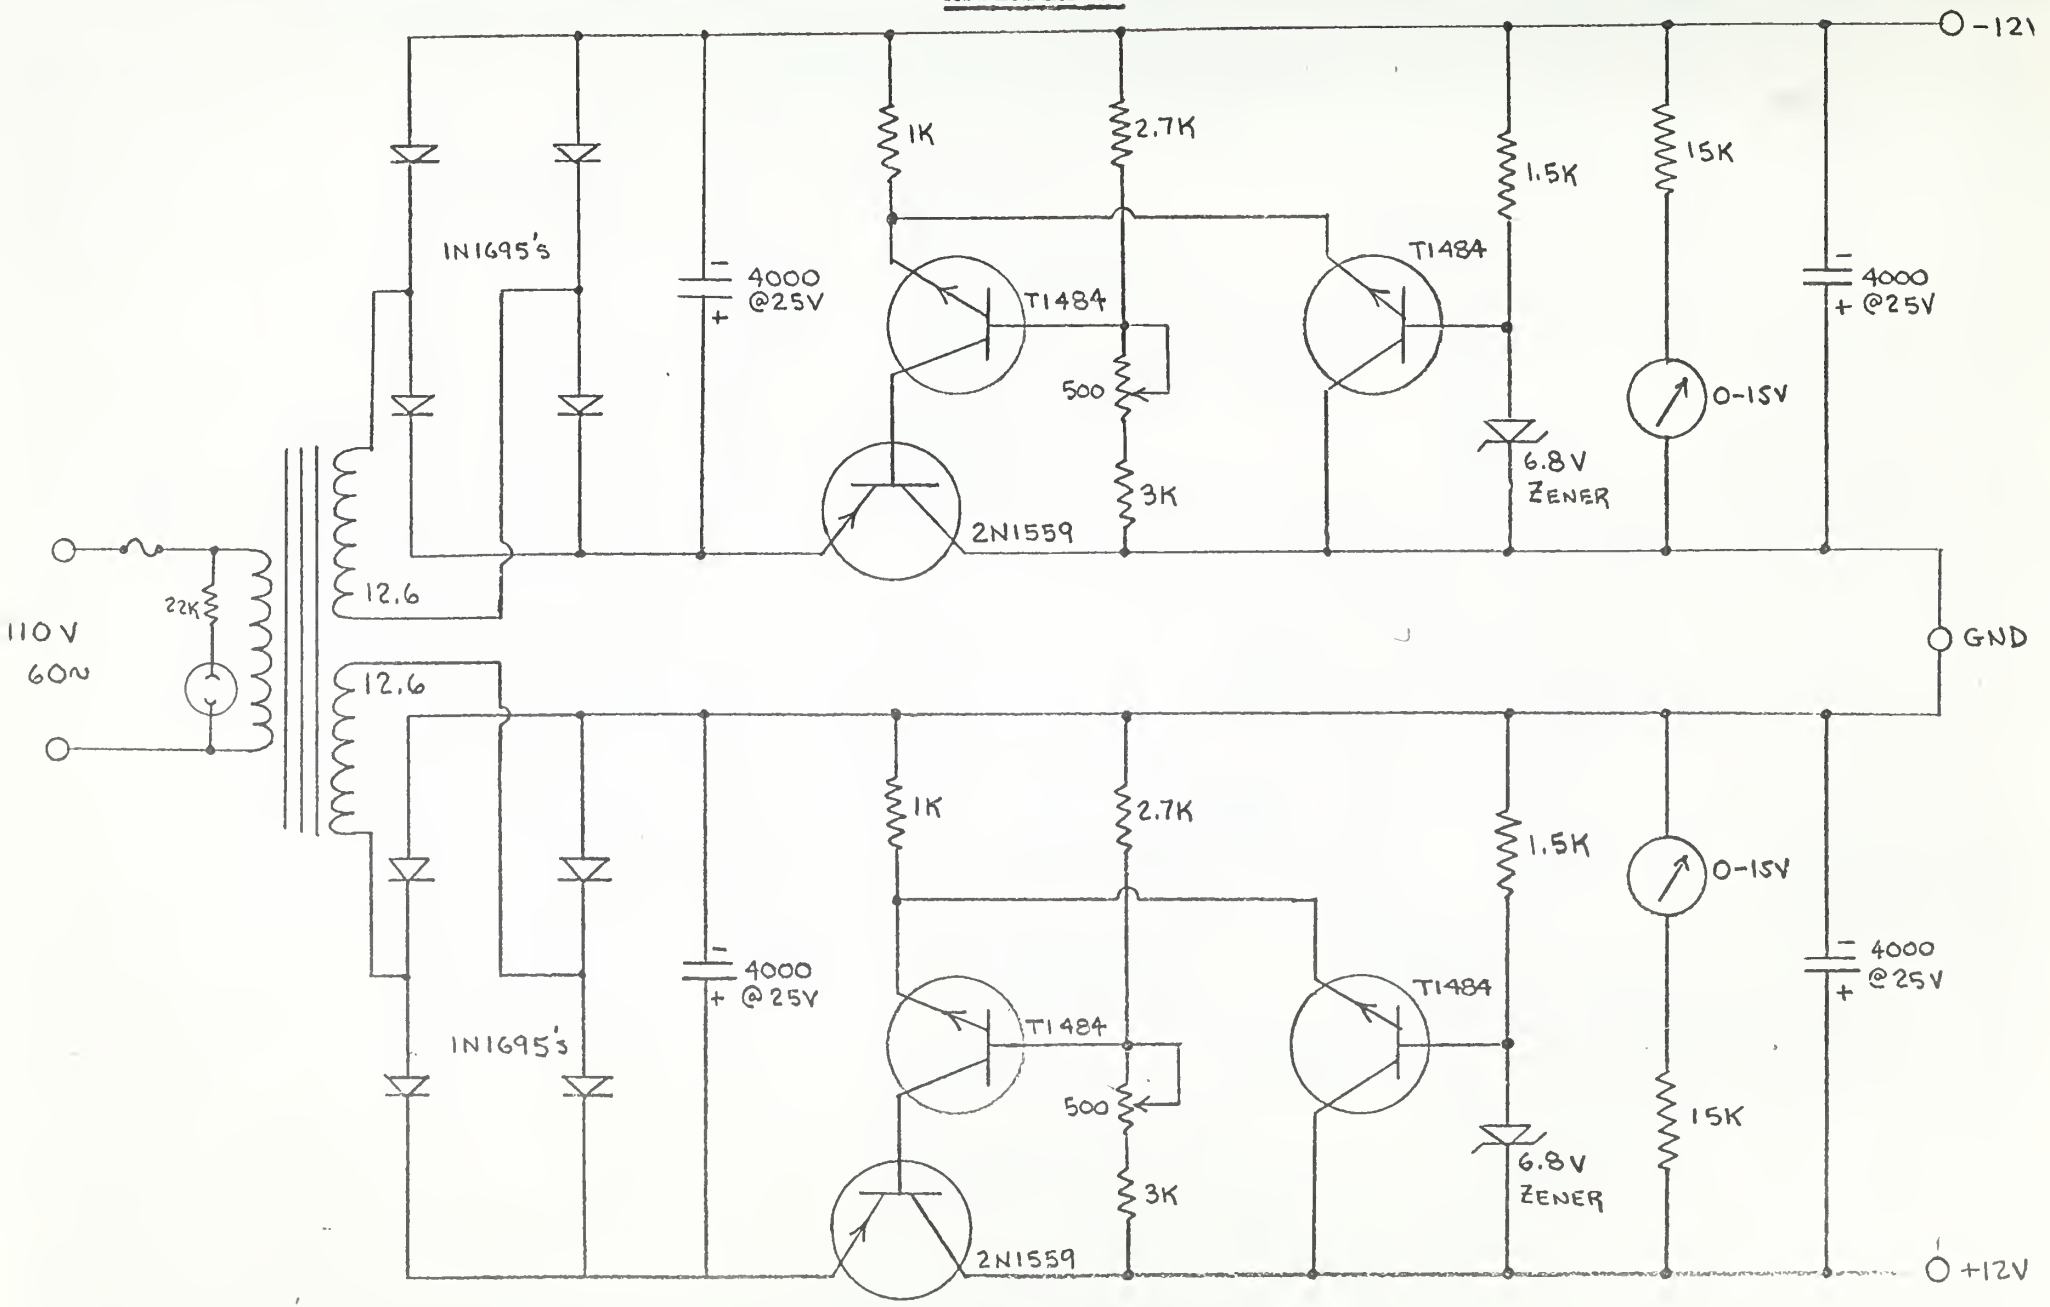
-12V
1K
2.7K
1.5K
15K
IN1695's
4000
@25V
T1484
T1484
500
3K
2N1559
6.8V
ZENER
0-15V
4000
+ @25V
110V
60~
22K
12.6
12.6
GND
1K
2.7K
1.5K
0-15V
4000
@25V
IN1695's
T1484
T1484
500
3K
15K
6.8V
ZENER
2N1559
+12V

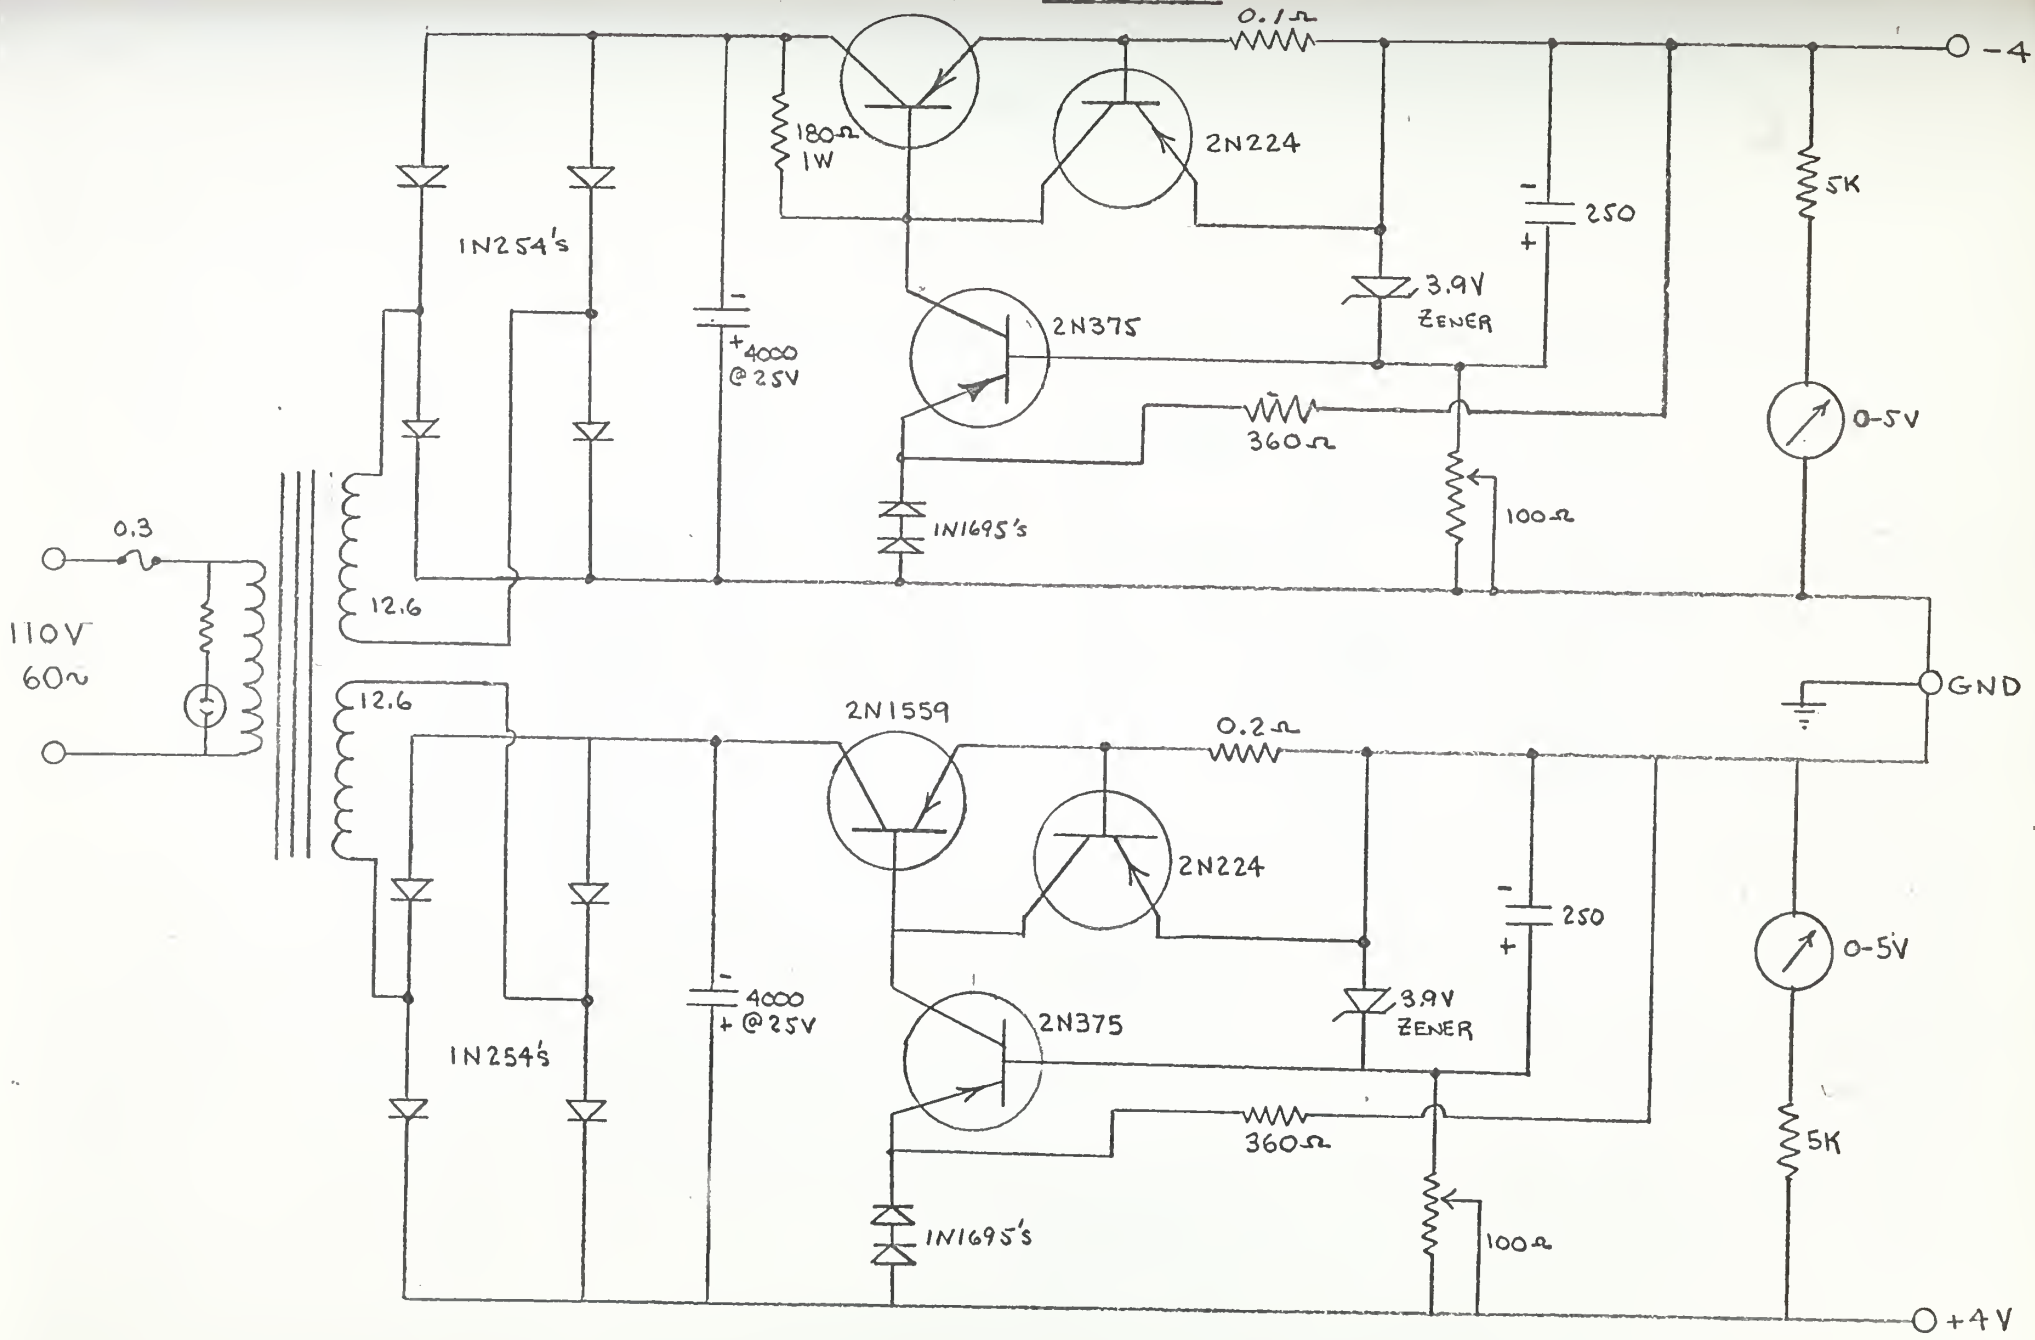
2N1559
0.1Ω
-4V
180Ω 1W
2N224
250
5K
1N254's
3.9V ZENER
4000 @25V
2N375
0-5V
360Ω
100Ω
1N1695's
0.3
110V 60~
12.6
GND
2N1559
0.2Ω
2N224
250
0-5V
4000 @25V
3.9V ZENER
2N375
1N254's
360Ω
5K
1N1695's
100Ω
+4V

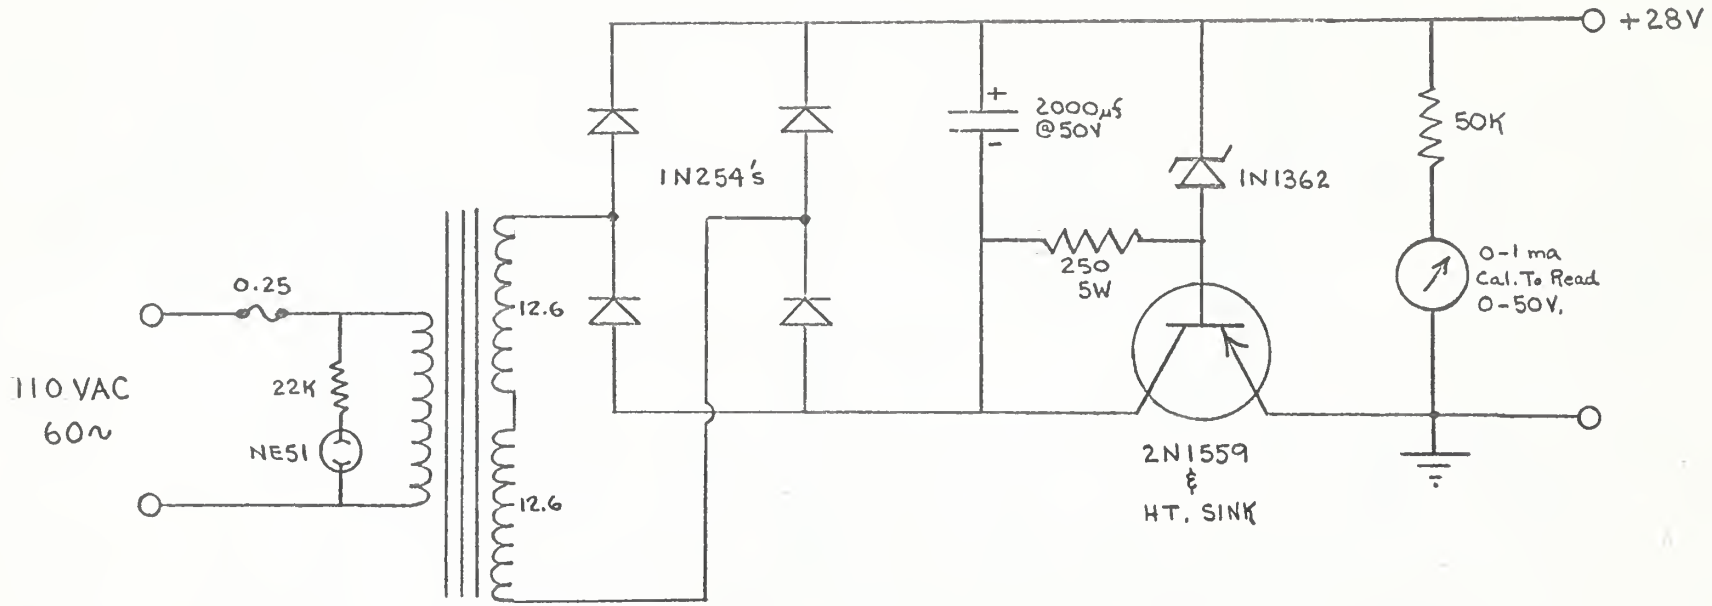
+28V
2000μf
@50V
1N254's
1N1362
50K
250
5W
0-1 ma
Cal. To Read
0-50V.
0.25
110 VAC
60~
22K
NE51
12.6
12.6
2N1559
&
HT. SINK

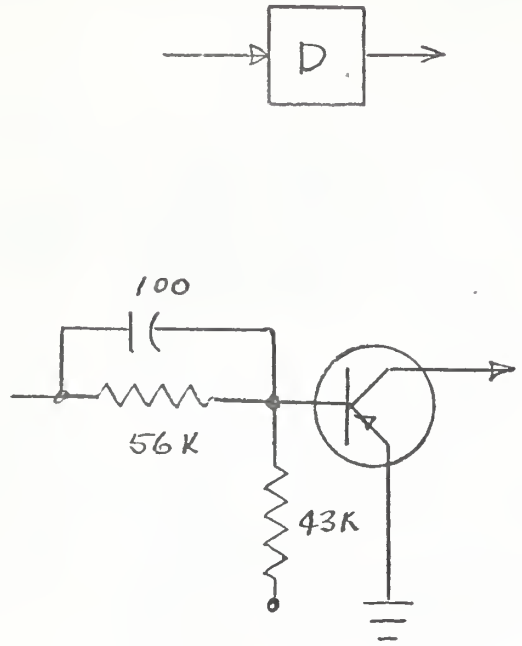
D
100
56K
43K

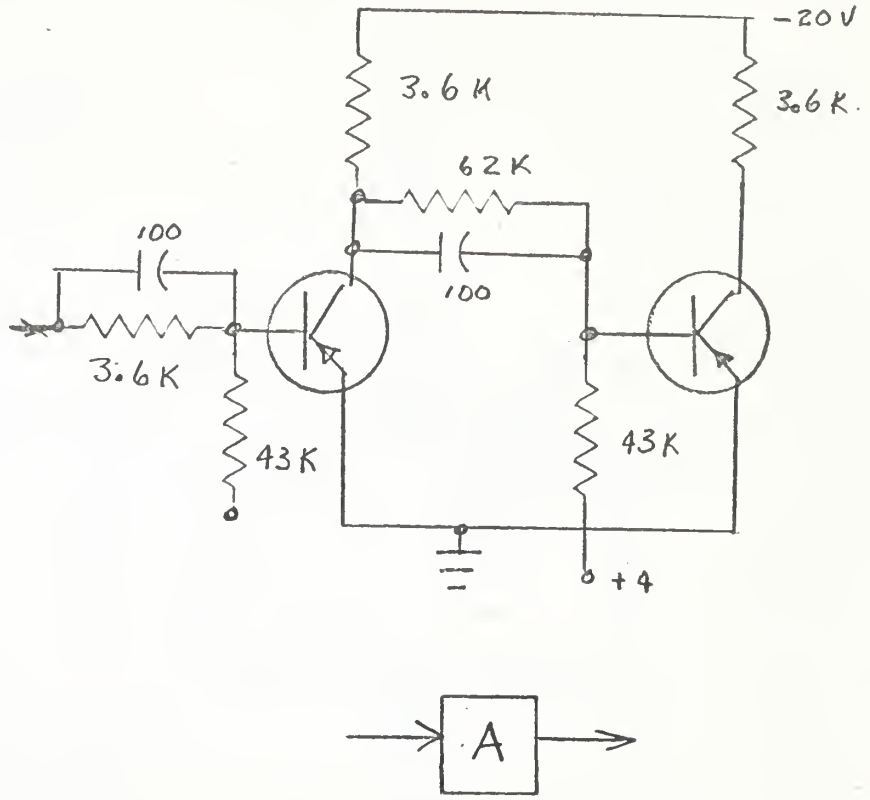
-20V
3.6K
3.6K
62K
100
100
3.6K
43K
43K
+4
A

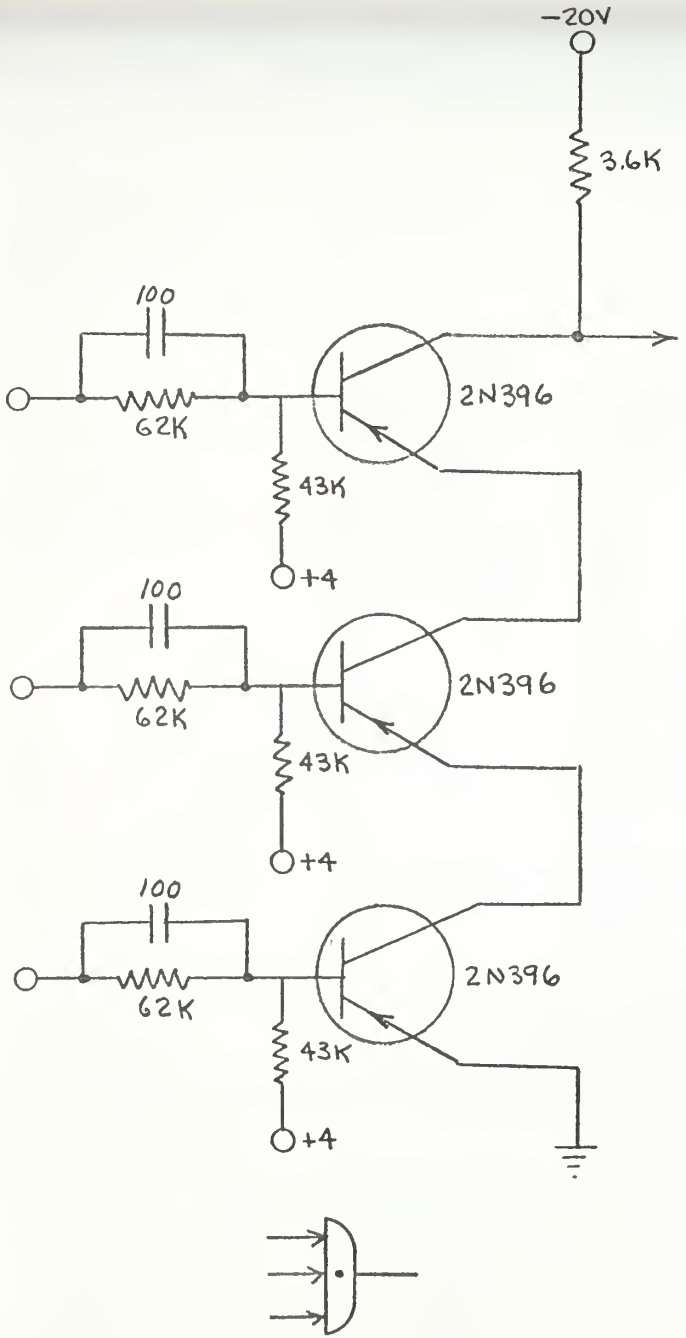
-20V
3.6K
100
62K
2N396
43K
+4
100
62K
2N396
43K
+4
100
62K
2N396
43K
+4

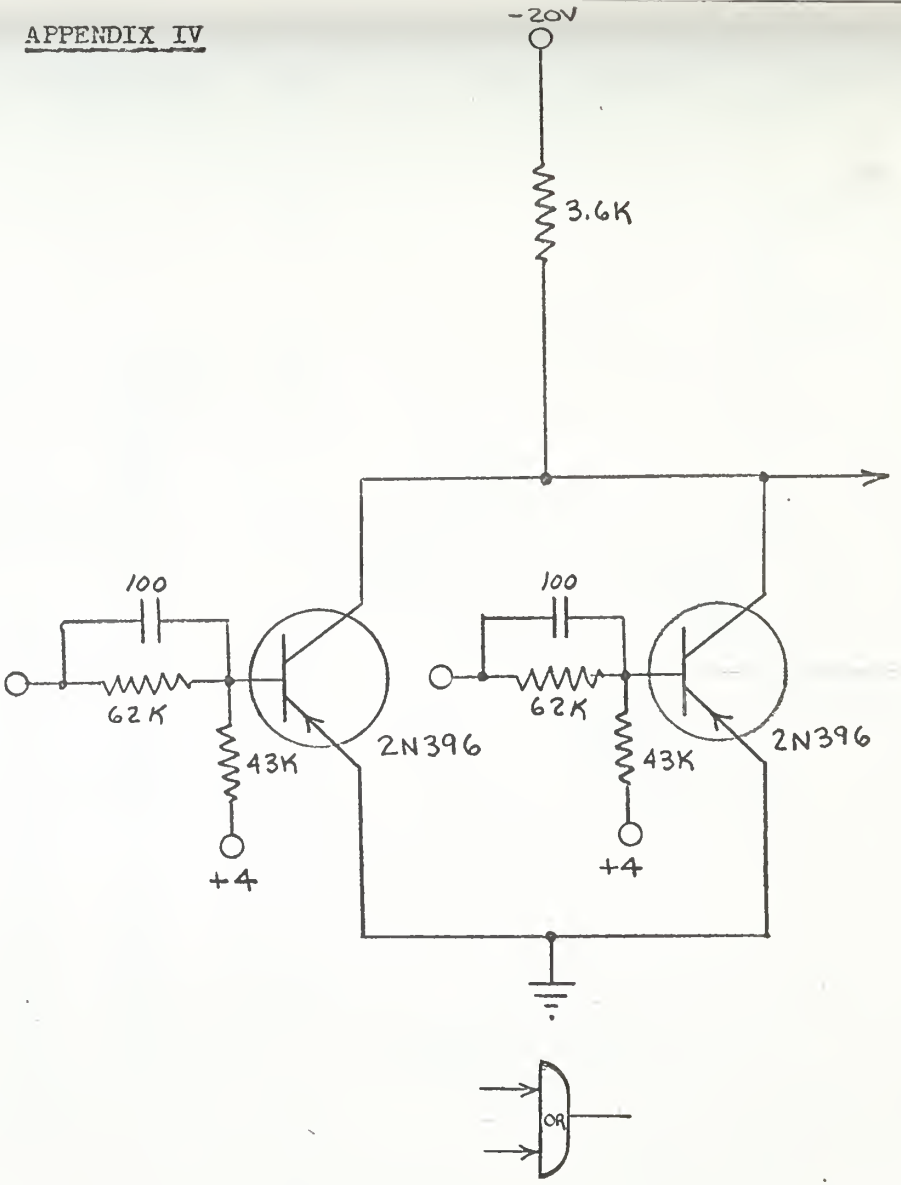
-20V
3.6K
100
62K
43K
2N396
+4
100
62K
43K
2N396
+4

OR

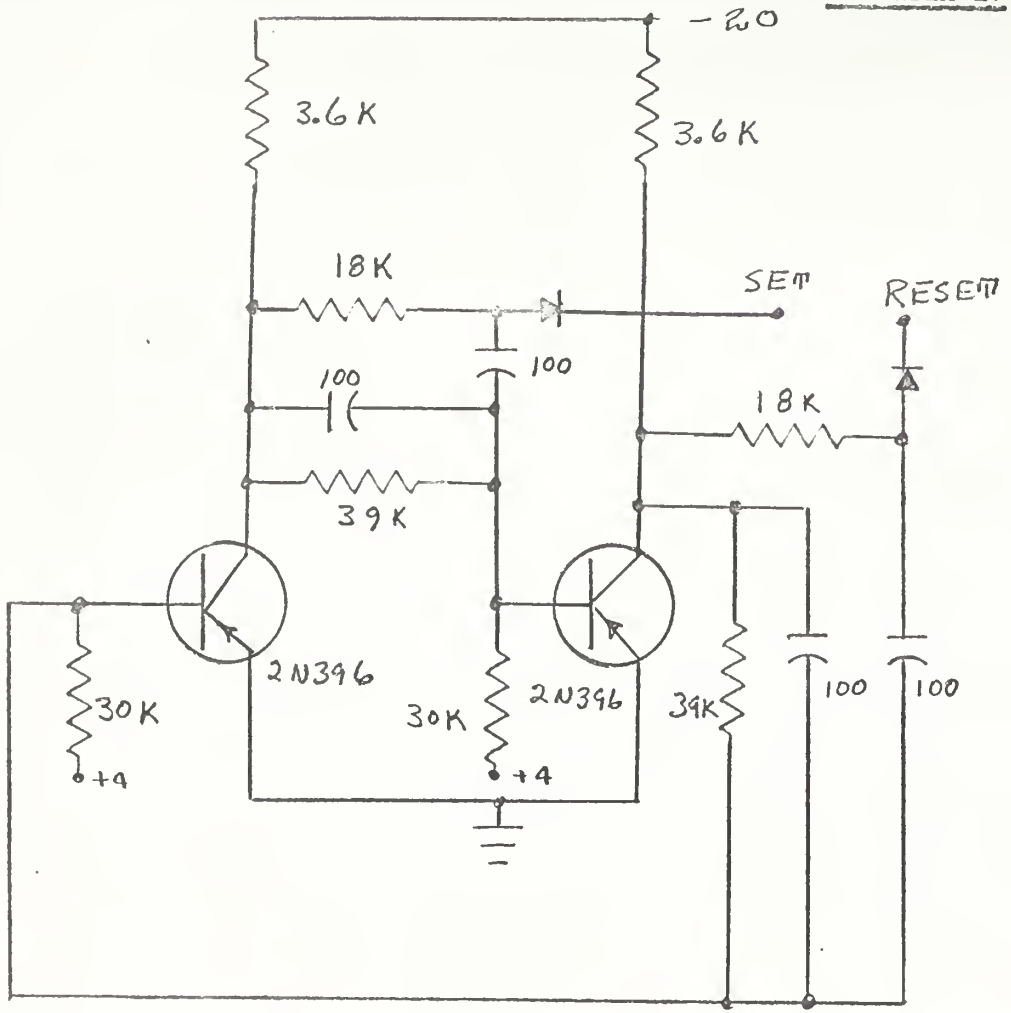
-20
3.6K
3.6K
18K
SET
RESET
100
100
18K
39K
2N396
2N396
30K
30K
+4
+4
39K
100
100

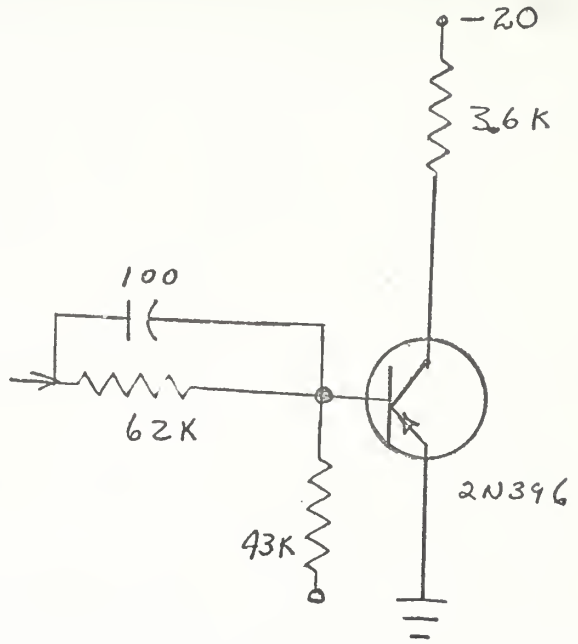
-20
3.6K
100
62K
2N396
43K


I


SET
RESET
F.F.

thesA4855
Proton magnetometer coherence.
3 2768 001 91509 3
DUDLEY KNOX LIBRARY